

Wavin Stormwater Management



CONNECT TO BETTER

Wavin Stormwater Management

Project Details			
Project Name	new bungalow	Produced By	Ella Pope
Client Name	Mr and Mrs Bacon		
Site Address	26 Ilex Way, BN12 4UY	Date	27/02/2026

Modular Units and Tank Details - soakaway


Unit configuration

The following information provides an approximate calculation and some assumptions. If more accurate information is required, please contact our technical team.

Length	4m	4 units
Width	2m	4 units
Depth	1.6m	4 units
Total Number of Units		64 units

Recommended Unit

Wavin recommend using the following unit for your installation.

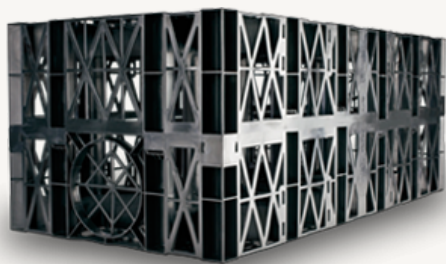

AquaCell Eco

Product Number: 6LB025

AquaCell Eco is manufactured from specially reformulated, recycled material and has been designed for shallow, non-trafficked, landscaped applications.

Other Unit(s)

The following unit(s) can also be used with, or in place of the recommended unit.

Calculations

Site Details

Area	62.5m ²
Soil Type	Silty sandy clay
Groundwater Present	No

Traffic Loading (Soakaway size based on 1:30 year Storm)	Non-Trafficked
--	----------------

If you would like to find out how to purchase, please contact your Area Sales Manager

Local Sales Manager

Name	Michelle Carey
Phone Number	07773 226040

Site Sales Manager

Name	Stuart Pluck
Phone Number	07740 925710

Aquacell Disclaimer

- All information generated by this tool is supplied in good faith and without charge to enable reasonable assessment of the practical performance of Wavin products.
- Wavin offers a program of continuous improvement and reserves the right to modify the specification of products without notice.
- All information in this publication is believed to be correct at time of preparation. However, no responsibility can be accepted for any errors or omissions. Final determination of the suitability of information or material for the use contemplated and the manner of the use is the sole responsibility of the user
- Calculations are based upon relevant industry standards in accordance with the Wallingford Procedure, and should be verified by a qualified engineer.