CLADCO PROFILES



3.6M CLADDING BOARD
FIBRE CEMENT LAP RANGE

Cladco fibre cement lap cladding boards are resilient, hassle-free and easy to maintain. With a choice of eight colours and an unpainted option to customise yourself, fibre cement lap boards offers the ultimate protection against harsh weather conditions. Each board measures 3.6m and is installed using a feather-board technique.

COLOUR RANGE

BLACK | BLUE | LIGHT GREY | CREAM | SLATE


GRANITE | WHITE | SAGE GREEN | UNPAINTED

BOARD SPECIFICATIONS

Length	3.66m
Width	210mm
Thickness	8mm
Coverage	0.6m^2
Weight	11kg

TEST CERTIFICATIONS


FSC® Certification		B - s1, d0 (EN 13501-1: 2018)
SKU	Black	FCLWBL36
	Blue	FCLWBG36
	Light Grey	FCLWWG36
	Cream	FCLWCW36
	Slate	FCLWSG36
	Granite	FCLWPE36
	White	FCLWWH36
	Sage Green	FCLWGG36
	Unpainted	FCLWNP36

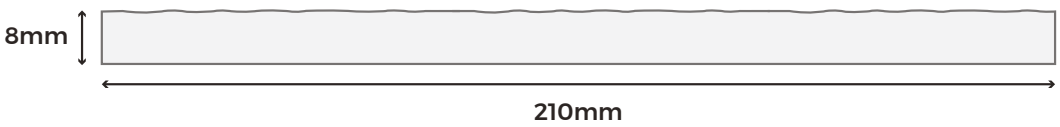

Please Note: Blue, black, cream, granite, slate, sage green, and white have been updated with an improved coating and a stronger finish. Images are for illustration purposes only. Actual products may vary slightly from those shown.

BMF Excellence in building materials supply
www.cladco.co.uk
T: 01837 659901 E: info@cladco.co.uk

CLADCO PROFILES

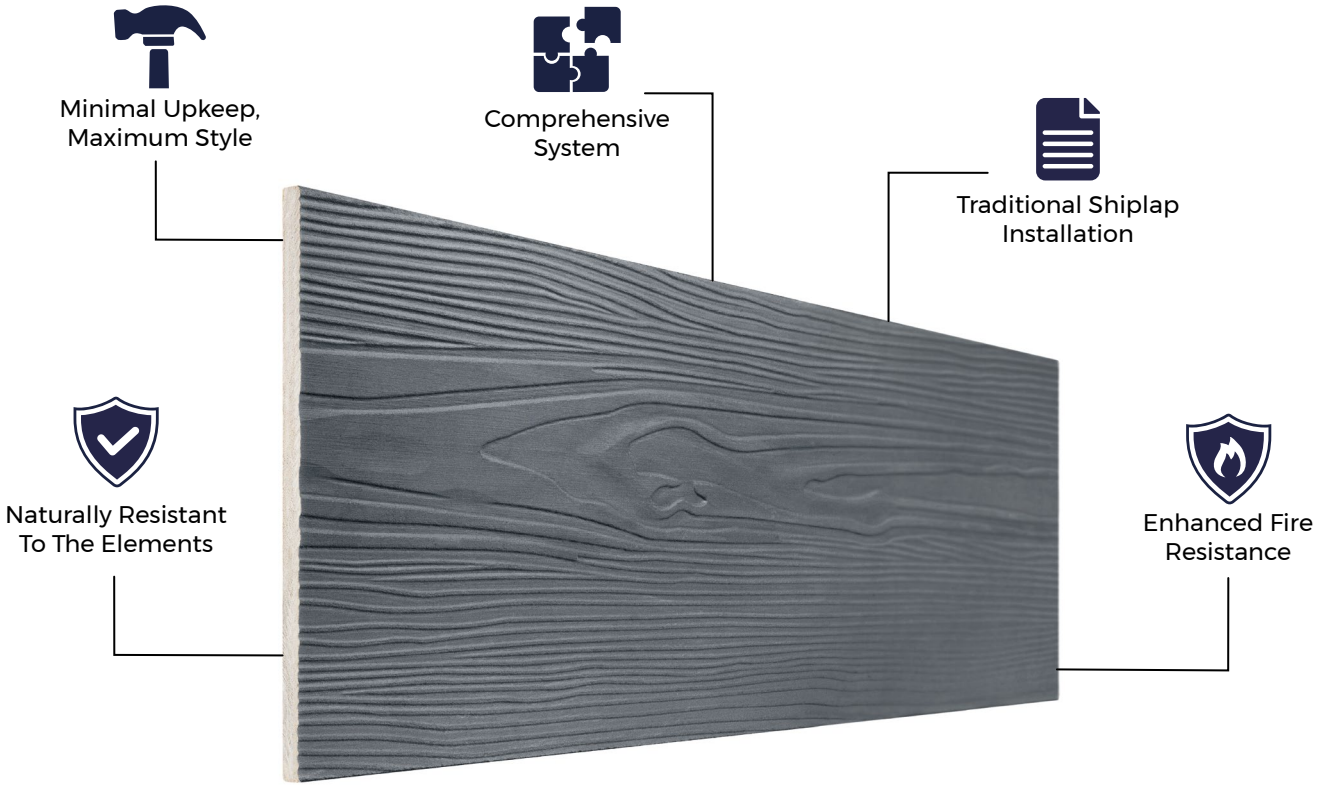

MATERIALS	SURFACES	ACCESSORIES	LOW MAINTENANCE	WARRANTY
Cellulose fibres and cement made with a blend of clay, iron and limestone.	Subtle embossed woodgrain effect design to transform any exterior.	Complete your project with Cladco aluminium trims and colour-matched screws.	Fibre cement lap boards are not prone to damage by mould, pests or rot.	Cladco fibre cement lap cladding boards come with a 10-year warranty.

DIMENSIONALLY STABLE

The mix of materials used in the manufacturing of Cladco fibre cement lap wall cladding produces a dimensionally-stable board. This results in little to no expansion of the boards when exposed to varying climates and temperatures.

EFFLORESCENCE

Efflorescence is a natural reaction in fibre cement products and can occur when moisture is present on the boards. To minimise this, we recommend storing boards indoors until they are ready to be installed. Avoid installing boards while they are wet, as this may increase the likelihood of efflorescence.

Ensure proper airflow behind the boards and along the perimeter of the cladding to allow for sufficient ventilation. Please note, this will eventually disappear as wind and rain dissolve the deposits.

AFTERCARE


To keep your fibre cement boards in pristine condition, simply clean periodically using lukewarm, soapy water with a cloth or soft brush. Always use a gentle detergent, high-pressured cleaning systems are NOT recommended.


Cladco fibre cement touch up paint can be used to hide marks or scratches on the surface of the boards that may accumulate over time, or during installation.

INSTALLATION ADVICE

The Measurements

Before installing any type of trim, whether that be symmetric, asymmetric or wall end trims, be sure to take all preliminary measurements detailed in our installation guide.

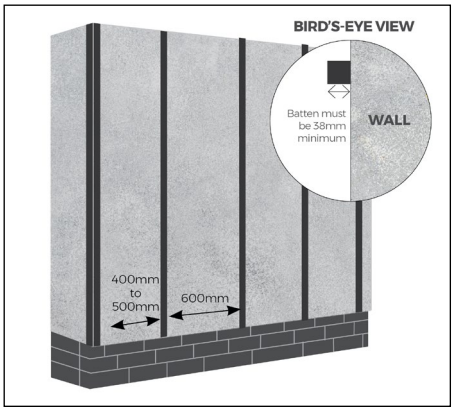

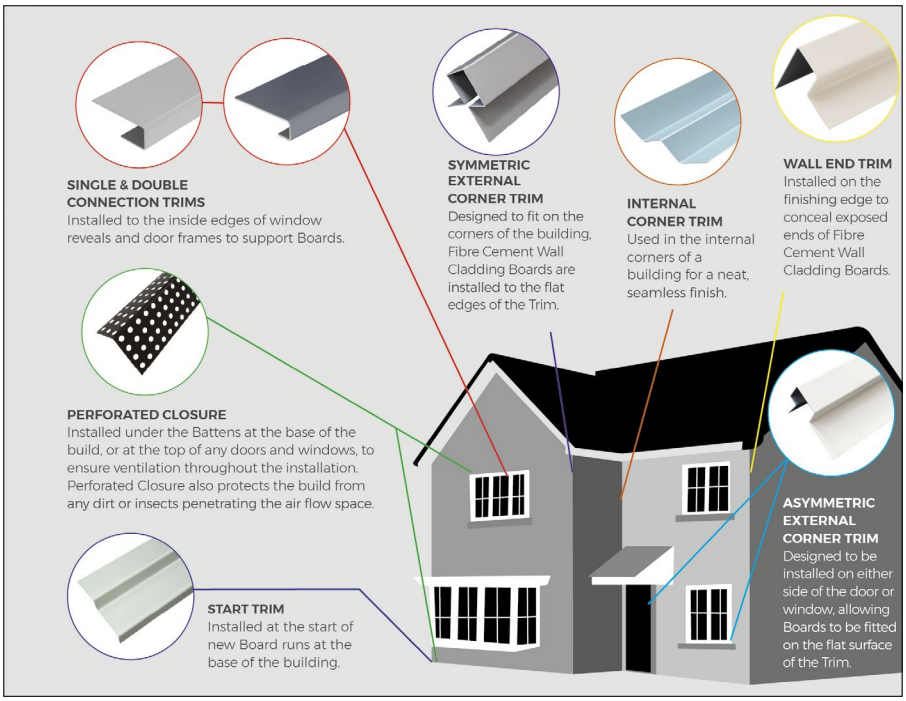


IMPORTANT NOTICE

When working with fibre cement materials, it is imperative that proper care is taken and necessary precautions are met. When fibre cement boards are cut, fine dust is released into the atmosphere.


The mineral itself is harmless, however, is dangerous if inhaled and will constitute a health hazard. A level P3 respiratory protective mask should be worn when cutting the boards.

For detailed information about installation, please read our fibre cement lap installation guide.


PRODUCT ACCESSORIES




PERFORATED CLOSURE



STARTER TRIM




DOUBLE CONNECTION TRIM




SYMMETRIC EXTERNAL CORNER TRIM




INTERNAL CORNER TRIM




SINGLE CONNECTION TRIM



START TRIM



WALL END TRIM



ASYMMETRIC EXTERNAL CORNER TRIM

www.cladco.co.uk
T: 01837 659901 E: info@cladco.co.uk