SURESPAN SPECIFICATION SHEET

SLH SLIDING ACCESS HATCH

SLH Overview

Surespan SLH sliding roof hatches have many advantages over standard 90° opening roof access hatches. The sliding roof hatches are ideal where there is a height restriction or risk of high wind, ensuring your roof hatch is operable in all weather conditions.

Hatches with up to 1500mm of travel are availale with retractable sliding gear.

STANDARD FEATURES

- Custom Made to Any Size
- Insulation U-Value 0.43 W/m2K
- Fully Insulated and energy efficient
- Double unbroken seals
- 50mm insulation thickness
- Integral 'wrap over' edge
- Electrically Operated

Material: Stainless steel or aluminium.

Cover: The lid is supported by heavy duty aluminium hinges and features an integral 'wrap over' edge, incorporating double unbroken seals.

Insulation: The lid is filled with CFC and HCFC free insulation
Offering GWP (Global Warming Potential) of 3, ODP (O-Zone Depletion Potential) of 0.

Upstand: 200mm in height and manufactured in aluminium. With a 50mm insulation thickness. The upstand has a purpose made flashing to accept the roof felt (supplied by others and fitted under manufacturers instructions) flush to exterior insulation. Optional thermally broken upstand also available.

Operation: Operated by a heavy-duty 24v DC Actuator to open the lid. The hatch is designed to be wired directly into the Building Management System by others or operating controls can be supplied.

Finish: The unit comes self colour as standard or can be provided polyester powder coated to any standard stocked RAL colour as an additional option.

Options:

Glazed Top	Stainless steel	Powder Coating
Thermal Break	Variable Upstand	Twin Colour
Trace Heating	SureGrip Non-Slip Finish	Wind/Rain Sensor

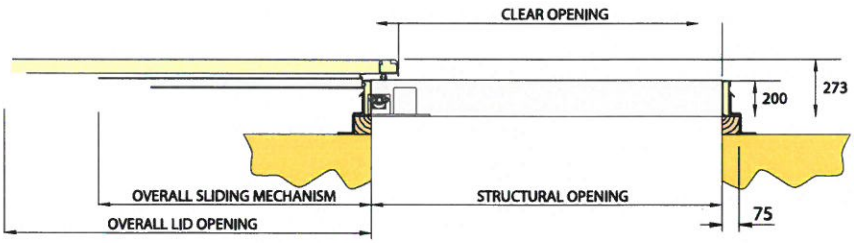



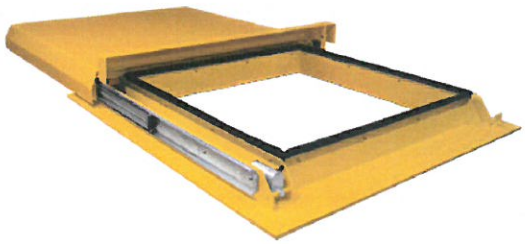



Leamore Close
Leamore Enterprise Park
Walsall, West Midlands
WS2 7NL, England

Telephone: +44 (0)1922 711185
Fax: +44 (0)1922 714099
E-mail: sales@surespancovers.com

SURESPAN

SLH Sliding Roof Hatch

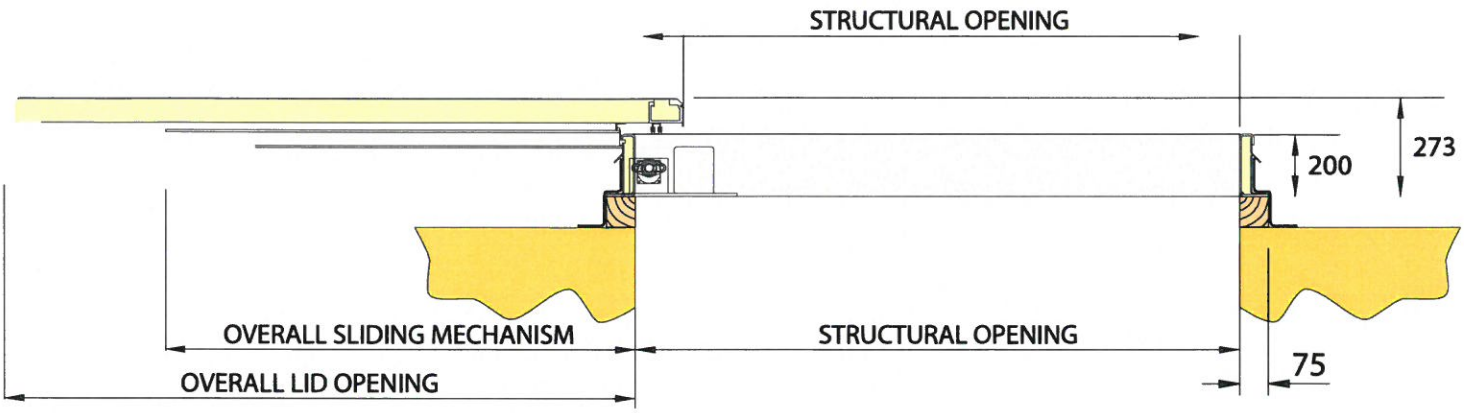

Leamore Close
Leamore Enterprise Park
Walsall, West Midlands
WS2 7NL, England

Telephone: +44 (0)1922 711185
Fax: +44 (0)1922 714099
E-mail: sales@surespancovers.com

SLH SLIDING ROOF HATCH





FOR TALL BUILDINGS AND HIGH WIND SITUATIONS

Surespan SLH sliding roof hatches have many advantages over standard 90° opening roof access hatches. The sliding roof hatches are ideal where there is a height restriction or risk of high wind, ensuring your roof hatch is operable in all weather conditions. Additionally, the sliding roof hatch can be utilised for airflow control or ventilation.

The lid is filled with 50mm of CFC and HCFC free insulation, with a minimum U-Value of 0.43W/m^2K to BS 4841-5: 2006. This offers a high level of thermal insulation, together with excellent sound absorption properties.

The hatch is designed to be wired direct into the BMS or FAS system by others for complete monitoring.

DOWNLOADS

- CAD drawing
- CAD Drawing (PDF)
- CAD drawing - GIF
- Spec Sheet

STANDARD FEATURES

- Custom made to any size
- Insulation U-Value 0.43 W/m^2K
- Fully insulated and energy efficient
- Secure rigid aluminium weather tight cover
- ODP (Ozone Depletion Potential) of 0
- GWP (Global Warming Potential) of 3



REQUEST A QUOTE

Choose your model size and add the features by clicking the "Add to Spec" button.



YOUR SPECIFICATION

Model:	SLH43 Select Size
Control:	Manual Only

your name *
project name *
email address *
phone number *
company name *

Start live chat