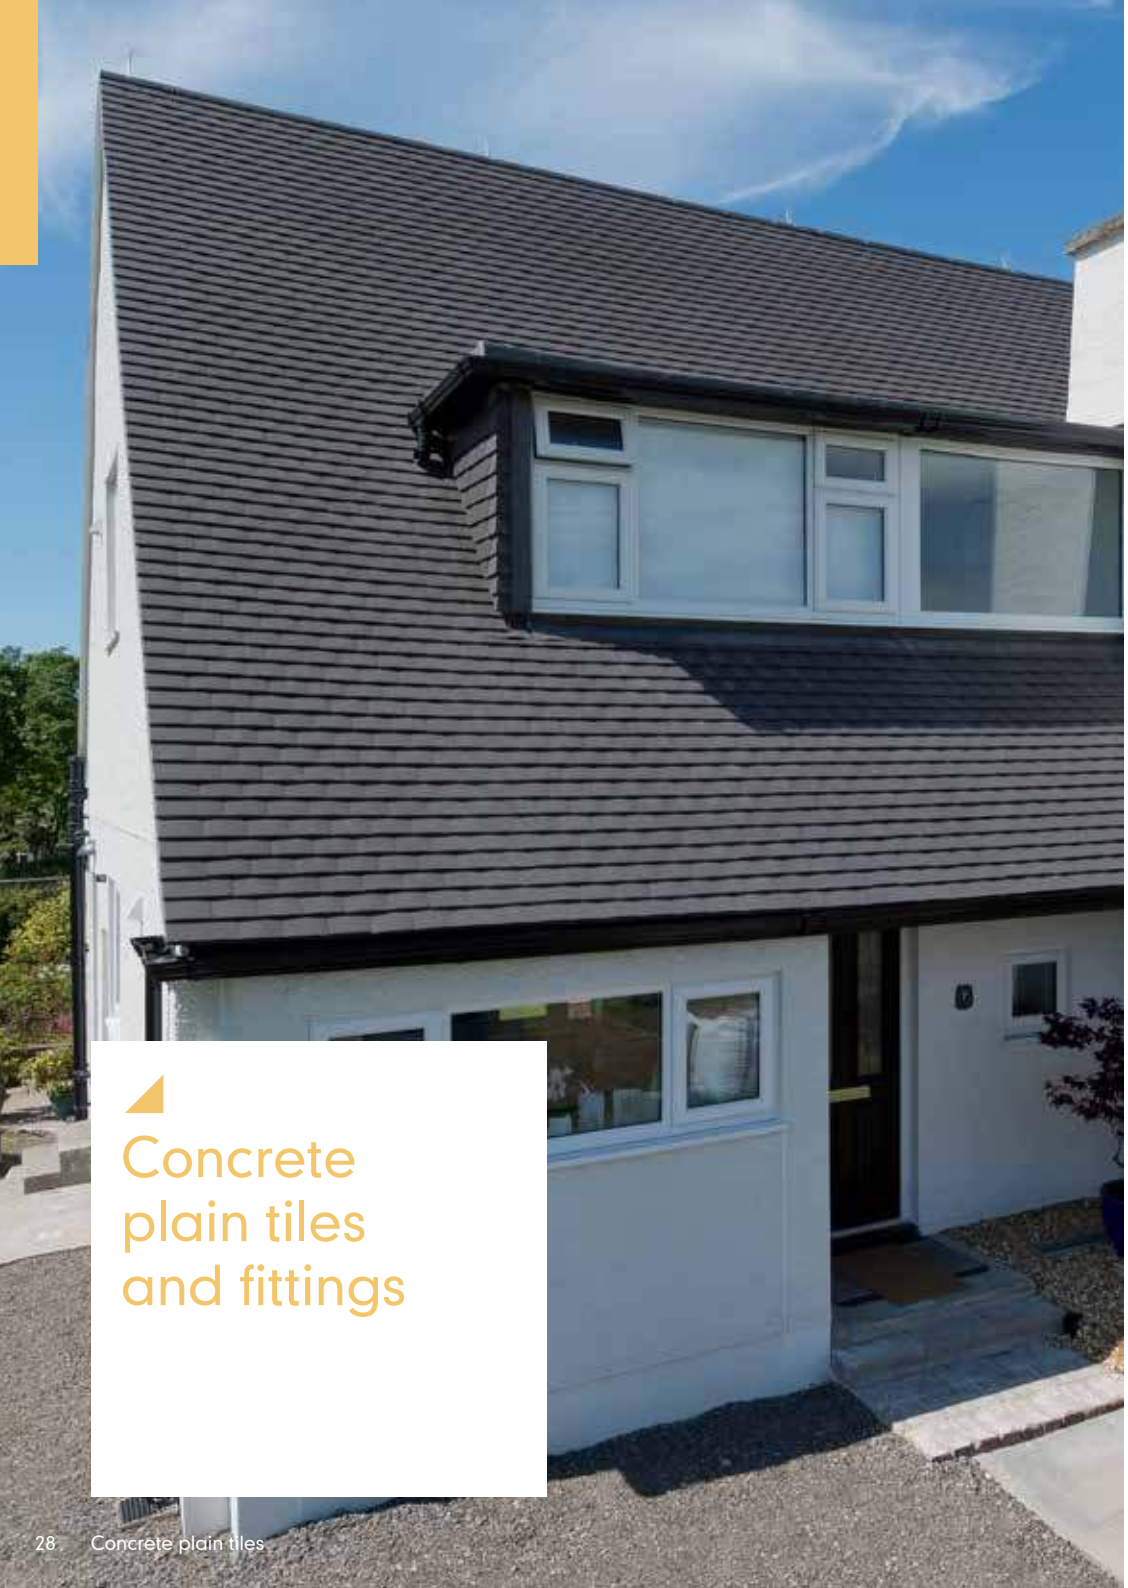

# Concrete plain tiles and fittings

# PLAIN

The authentic single camber design of the Marley concrete plain tile gives it a look to match its outstanding versatility.



## COLOUR AVAILABILITY




























**Key** (F) Fine sanded finish (G) Granular finish (S) Smooth finish

## TECHNICAL DATA

| | | |
|---|---|---|
| Size of tile | 267mm x 168mm | |
| Minimum pitch* | 35° | |
| Maximum pitch | 90° | |
| Minimum headlap | 65mm (roof) | 37.5mm (vertical) |
| Maximum gauge | 100mm (roof) | 115mm (vertical) |
| Tile thickness | 12mm (nominal) | |
| Cover width | 168mm (nominal) | |
| Covering capacity (net) | 60 tiles/m² at 100mm gauge (roof) | 53 tiles/m² at 115mm gauge (vertical) |
| Weight of tiling (approx.) | 73.8kg/m² (0.72 kN/m²) at 100mm gauge (roof) | 58kg/m² (0.57 kN/m²) at 115mm gauge (vertical) |
| Battens required (net) | 10.0 lin.m/m² at 100mm gauge (roof) | 8.7 lin.m/m² at 115mm gauge (vertical) |
| Batten size recommended | 38mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) | |
| Tile nails | 38mm x 2.65mm | |
| Authority | BS EN 490 | |

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced concrete plain tiles Element Refs: 812410017, 812410050, 812410064)
- ✓ BES 6001 Responsible Sourcing certified

## PRODUCT INFORMATION

**Tile camber**
Single camber



**Feature tiles**
For advice on the use of feature tiles in main roof areas contact the Technical Advisory Service.

† Made to order


Club†


Bullnose†