AMENDMENT AWDM/1521/13 Rec'd 6 FEB 2014

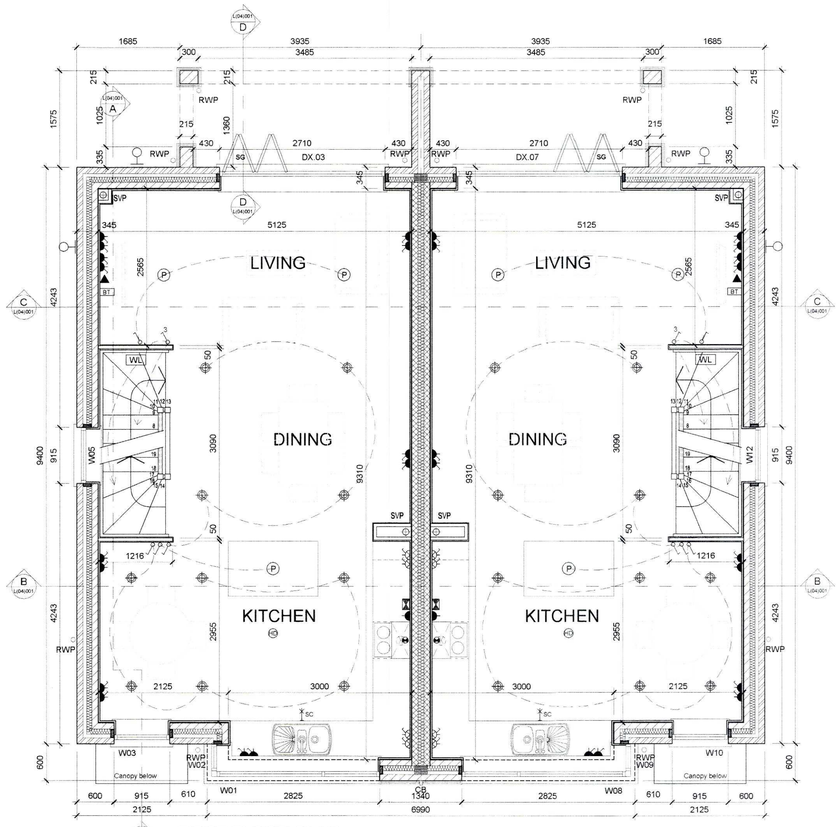

FIRST FLOOR PLAN -1:50 @A1

GROUND FLOOR PLAN -1:50 @A1

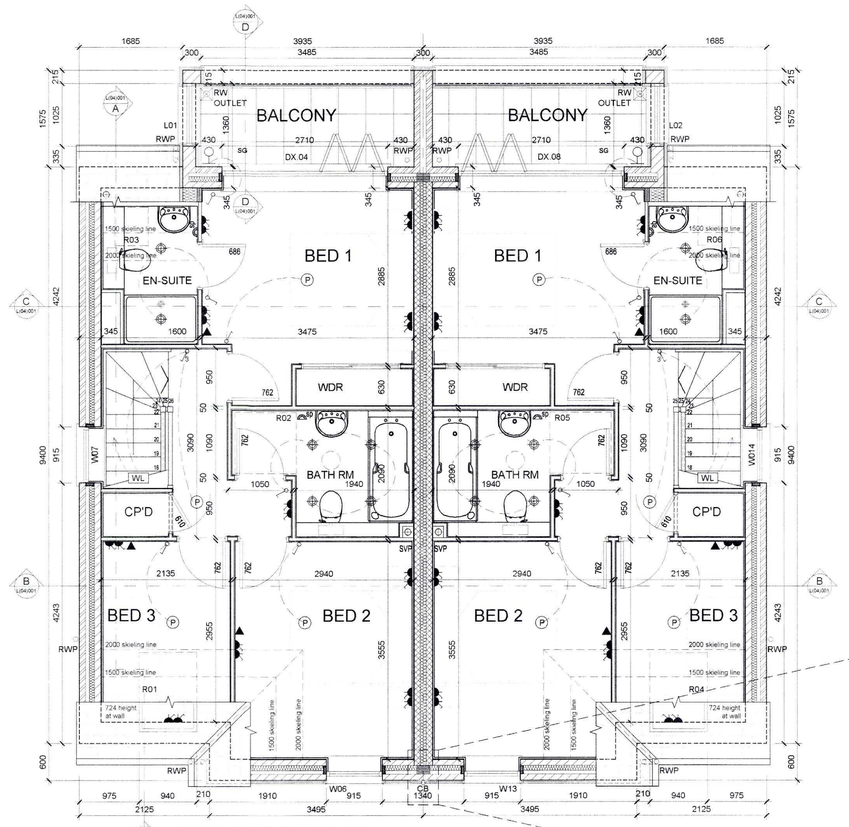

SECOND FLOOR PLAN -1:50 @A1

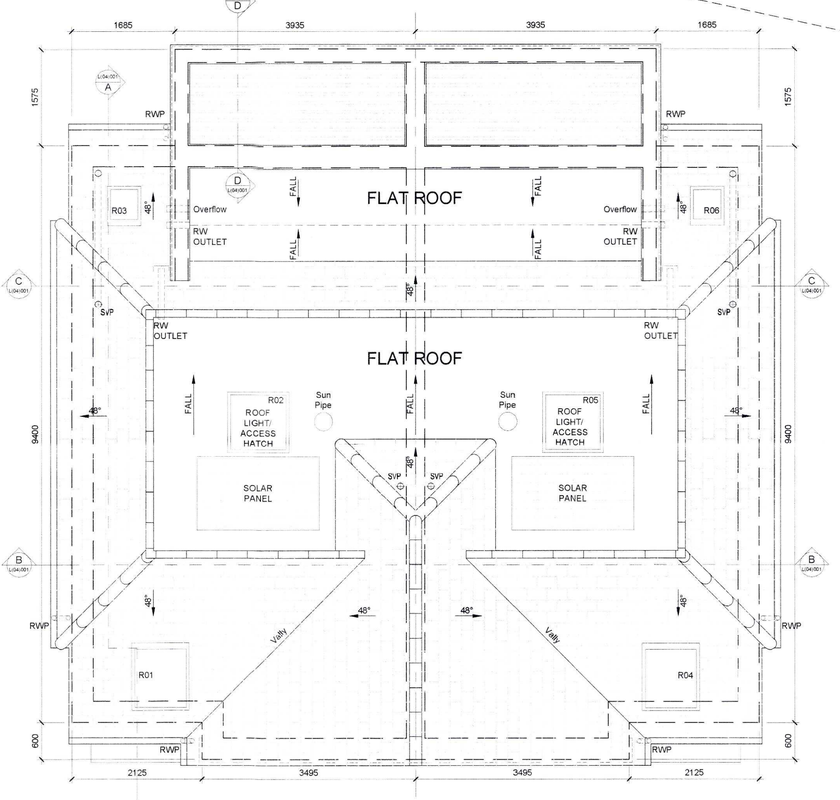

ROOF PLAN -1:50 @A1

Legend

- FD 30 door with self closer
- FD 30 door
- CB Cavity Barrier location
- WM Space for Washing Machine under
- DW Dishwasher
- FR / FZ Space for Fridge Freezer
- CPD Cupboard
- WDR Wardrobe
- SVP Soil Vent Pipe Location
- (S) Mains Inter linked smoke detector
- (HD) Mains Inter linked heat detector
- (CO) Mains Inter linked carbon monoxide detector

North

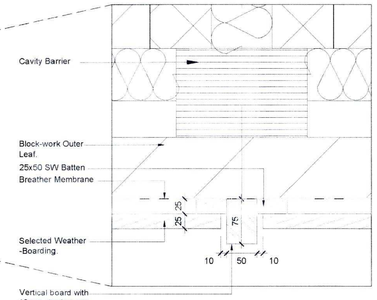

CDM 2007 Health & Safety Information

This information relates only to 'Significant Hazards' identified on this drawing and is to be read in conjunction with the Designer's Risk Assessment Register.

SYMBOL	DESCRIPTION
	13 AMP,TWIN SWITCHED SOCKET OUTLET
	13 AMP,SINGLE SWITCHED SOCKET OUTLET
	13 AMP,SINGLE UN SWITCHED SOCKET OUTLET
EX	13 AMP,TWIN SWITCHED EXTERNAL WEATHERPROOF SOCKET OUTLET
	13 AMP TWIN SWITCHED SOCKET OUTLET ABOVE WORKTOP
FSP	SWITCHED SPURS APPLIANCE PANEL ABOVE WORKTOP CONTROLLING UNSWITCHED SOCKETS BELOW WORKTOP AND ETCHED WITH APPLIANCE NAME ACCORDINGLY.
	13 AMP FUSED SWITCHED SPUR A= for future alarm, B=Boiler, F= Extratcor fan, TA = TV Amplifier)
F	13 AMP UN SWITCHED SPUR AT HIGH LEVEL FOR EXTRACTOR FAN
	13 AMP SECURED LANDLORDS SWITCHED SPUR UNIT
EFIS	EXTRACTOR FAN ISOLATION SWITCH
	IMMERSION HEATER SWITCH WITH ENGRAVED NEON
SO	SHAVER SOCKET
	EXTERNAL PHOTCELL DUSK TO DAWN SENSOR SWITCH
2	TWO WAY SWITCH
	ONE WAY SWITCH
	PULL CORD CEILING SWITCH
	PUSH BUTTON WITH TIME DELAY SWITCH Note '2n' INDICATES 2 GANG
	TELEPHONE POINT
A	TELEVISION AMPLIFIER
	COOKER FLEX OUTLET PLATE (750 MM ABOVE F.F.L.)
	COOKER SWITCH TO BE ENGRAVED (1200 MM ABOVE F.F.L.)
	CONSUMER SERVICE UNIT WITH LOCKABLE DOOR
BT	BRITISH TELECOM INTAKE ADAPTABLE BOX.
	TELECOM DISTRIBUTION BOX
CH/HW	CENTRAL HEATING WIRING JUNCTION BOX WITH PROGRAMMER
	DOOR BELL MAINS OPERATED
	DEDICATED LOW ENERGY BAYONET/ FLUSH LIGHT FITTING (VAPOUR PROOF TO BATHROOM)
	(LED) RECESSED DOWNLIGHTER
P	PENDANT LIGHT FITTING (LOW ENERGY)
	BELL PUSH WITH ILLUMINATION
T	ROOM DIGITAL THERMOSTAT WITH LOAD COMPENSATOR
SC	STOPCOCK
EX	CEILING MOUNTED EXTRACT DUCT AND GRILL
BF	BOILER FLUE
	EXTERNAL LIGHT FITTING SECURITY LIGHT - PIR ACTIVATED.
S	SECURITY LIGHT ENERGY EFFICIENT FITTING WITH PIR AND DAYLIGHT SENSOR - Note: Burglar security lighting to have a max wattage of 150W.
SP	SPACE LIGHTING DEDICATED ENERGY EFFICIENT FITTING WITH DAYLIGHT SENSOR
	RADIATOR
BH	BAR HEATER
(S)	MAINS INTER LINKED SMOKE DETECTOR
(HD)	MAINS INTER LINKED HEAT DETECTOR
(CO)	MAINS INTER LINKED CARBON MONOXIDE DETECTOR
	GAS POINT
EM	ELECTRIC METER BOX
GM	GAS METER BOX

Rev	Date	Revision Details	Dr	Ch
A3	06-02-14	Revised to include Planners Comments	emc	ak
A2	15-01-14	1. Doors added between Garages & GF Halls 2. Sun Pipes added to main Bathrooms	emc	ns
A1	19-12-13	Issued for Approval	emc	ak
P2	17-12-13	Issued for Information	emc	pf
P1	20-11-13	Preliminary Issue	rgh	ak

ECE Architecture

London: Unit 1 West Coate House 3 Coate Street London E2 9AG
T 020 7729 5505 E london@ecearchitecture.com

Sussex: Brooklyn Chambers 11 Goring Road Worthing West Sussex BN12 4AP
T 01903 248777 E sussex@ecearchitecture.com

www.ecearchitecture.com

Client's Name
Kitmarr Ltd

Job Title
Two Semi-Detached Dwellings :
212 Brighton Road Lancing

Drawing Title
Proposed Floor Plans

Scale
1:100 @ A1 / 1:200 @ A3

metres 2 4 6 8 10

Drawn	Checked	Date
rgh	ak	13.11.13

Job No	Drawing No	Rev
6040	L(01) 001	A3

Status
APPROVAL

CAD Plot date: 6/02/2014 - 09:54:30 6040 - wd-master-emc.dwg

© ECE Architecture Limited. No dimensions to be scaled from drawing except for the purposes of Planning Applications. The contractor should check all dimensions on site. It is the contractors responsibility to ensure compliance with Building Regulations.