REF	Description	Code	Quant
A	37 Series recessed down light 2275Lm 3000K 21W IP54 White	37.002	0
C	Pino recessed down light 2800Lm 4000K 24W White	PINO2005CE.0	0
C1	PINO Recessed down light 2600lm 3000K 24W White	PINO2004CE.0	0
F	Bolt recessed spot light 3700Lm 3000K 29W White	BOLT2002CE.0	0
F1-250	Touch Mini recessed spot light 1300Lm 3000K 11W White	THMN2002CE.0	22
F1-450	Touch Mini recessed spot light 2240Lm 3000K 18W White	THMN2002CE.0	9
G-350	PINO Recessed down light 1750lm 4000K 14W White	PINO2002CE.0	27
G-450	PINO Recessed down light 2200lm 4000K 18.5W White	PINO2002CE.0	30
GD	PINO Recessed down light 2000lm 4000K 16W White Tridonic BasicDIM driver	PINO2003CE.0	16
G1-350	PINO Recessed down light 1618lm 3000K 14W White	PINO2006CE.0	0
G1-450	PINO Recessed down light 2023lm 3000K 18.5W White	PINO2006CE.0	0
G1D	PINO Recessed down light 1900lm 3000K 16W White Tridonic BasicDIM driver	PINO2007CE.0	0
J	600x600 recessed panel 3600Lm 4000K 29W White	aiPanel	26
J1	600x600 surface mounted panel 3600Lm 4000K 29W White	aiPanel + 1392478	1
K	aiStage surface mounted bulkhead 2200Lm 4000K 19.6W White	aiST6003CE.0	28
KE	aiStage surface mounted bulkhead 2200Lm 4000K 19.6W C/W 3 hour self test EM White	aiST6003CE.0/EM	27
K1	aiStage surface mounted bulkhead 1330Lm 4000K 11.9W C/W microwave sensor White	aiST6003CE.0/MW	0
M	Surface mounted linear 4385Lm 4000K 38W White	SP99999-2016	16
N	Streamer track mounted adjustable spot light 2400Lm 3000K 20W White	Streamer	0
O	Surface mounted linear batten IP65 5200Lm 4000K 36W White	aiPax	0
GSP	Enocean double rocker dimming switch white	E8221-A280	7
E2	Recessed mini emergency down light 2W self test with 3 hour battery and inverter White	E2	20
E3	Surface mounted emergency bulkhead C/W 3 hour self test battery and inverter White	E3	13
E4	Surface mounted emergency exit sign with legend kit. White	E4	23
J2	Dwide surface mounted 4500Lm 4000K 38W White	22333-402	19

NOTES:

Not included in design as no access during survey

Revision Cloud

GROUND FLOOR:
- REMOVE EXISTING WALL UPLIGHTERS

FIRST FLOOR:
- REMOVE EXISTING WALL UPLIGHTERS

DRAWING TO BE SENT TO SIGNIFY TO DESIGN / SUPPLY FIRST FLOOR BATTENS

BASEMENT FLOOR



GROUND FLOOR

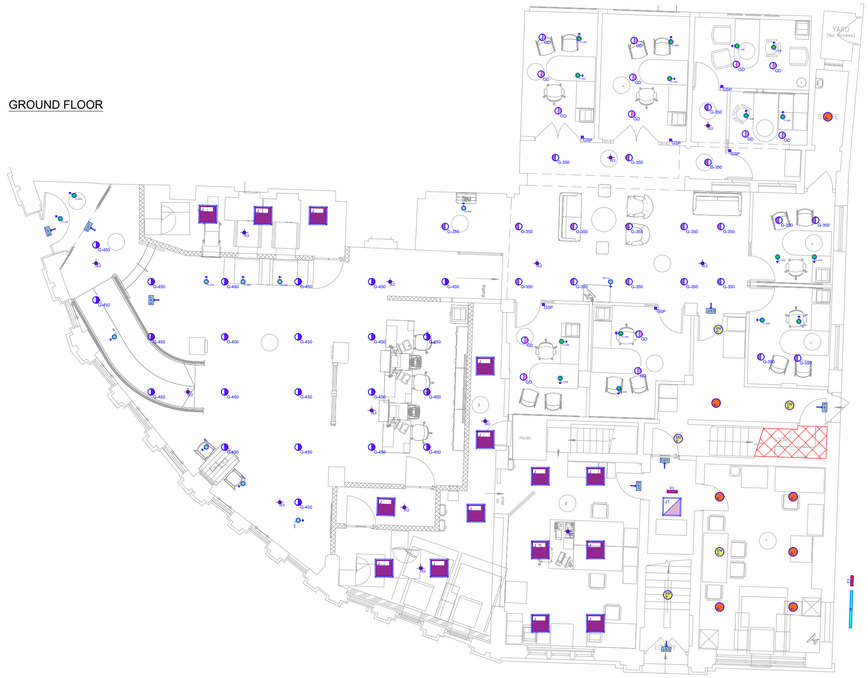

FIRST FLOOR


Lift Shaft
DOCUMENT HOIST
WC
WC
RECEPTION
RECEPTION
RECEPTION

REF		Description	Code	Quant
A	A	37 Series recessed down light 2275Lm 3000K 21W IP54 White	37.002	0
C	C	Pino recessed down light 2800Lm 4000K 24W White	PINO2005CE.0	0
C1	C1	PINO Recessed down light 2600lm 3000K 24W White	PINO2004CE.0	0
F	F	Bolt recessed spot light 3700Lm 3000K 29W White	BOLT2002CE.0	0
F1-250	F1-250	Touch Mini recessed spot light 1300Lm 3000K 11W White	THMN2002CE.0	22
F1-450	F1-450	Touch Mini recessed spot light 2240Lm 3000K 18W White	THMN2002CE.0	9
G-350	G-350	PINO Recessed down light 1750lm 4000K 14W White	PINO2002CE.0	27
G-450	G-450	PINO Recessed down light 2200lm 4000K 18.5W White	PINO2002CE.0	30
GD	GD	PINO Recessed down light 2000lm 4000K 16W White Tridonic BasicDIM driver	PINO2003CE.0	16
G1-350	G1-350	PINO Recessed down light 1618lm 3000K 14W White	PINO2006CE.0	0
G1-450	G1-450	PINO Recessed down light 2023lm 3000K 18.5W White	PINO2006CE.0	0
G1D	G1D	PINO Recessed down light 1900lm 3000K 16W White Tridonic BasicDIM driver	PINO2007CE.0	0
J	J	600x600 recessed panel 3600Lm 4000K 29W White	aiPanel	26
J1	J1	600x600 surface mounted panel 3600Lm 4000K 29W White	aiPanel + 1392478	1
K	K	aiStage surface mounted bulkhead 2200Lm 4000K 19.6W White	aiST6003CE.0	28
KE	KE	aiStage surface mounted bulkhead 2200Lm 4000K 19.6W C/W 3 hour self test EM White	aiST6003CE.0/EM	27
K1	K1	aiStage surface mounted bulkhead 1330Lm 4000K 11.9W C/W microwave sensor White	aiST6003CE.0/MW	0
M	M	Surface mounted linear 4385Lm 4000K 38W White	SP99999-2016	16
N	N	Streamer track mounted adjustable spot light 2400Lm 3000K 20W White	Streamer	0
O	O	Surface mounted linear batten IP65 5200Lm 4000K 36W White	aiPax	0
GSP	GSP	Enocean double rocker dimming switch white	E8221-A280	7
E2	E2	Recessed mini emergency down light 2W self test with 3 hour battery and inverter White	E2	20
E3	E3	Surface mounted emergency bulkhead C/W 3 hour self test battery and inverter White	E3	13
EXIT	E4	Surface mounted emergency exit sign with legend kit. White	E4	23
J2	J2	Dwide surface mounted 4500Lm 4000K 38W White	22333-402	19

THIRD FLOOR

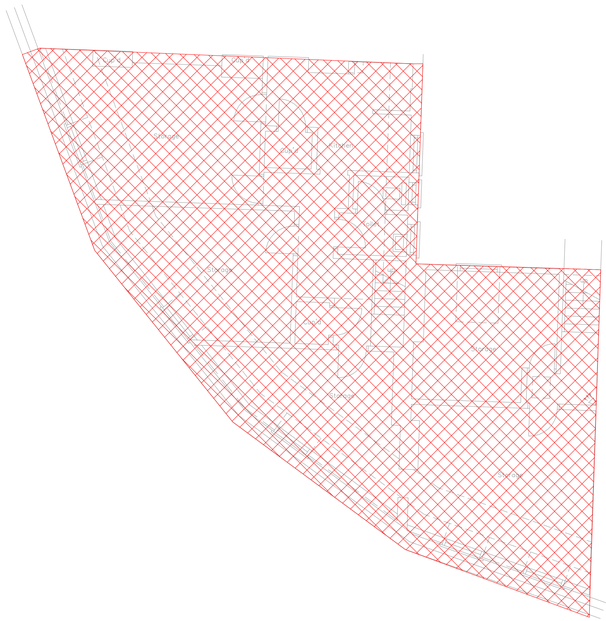

SECOND FLOOR

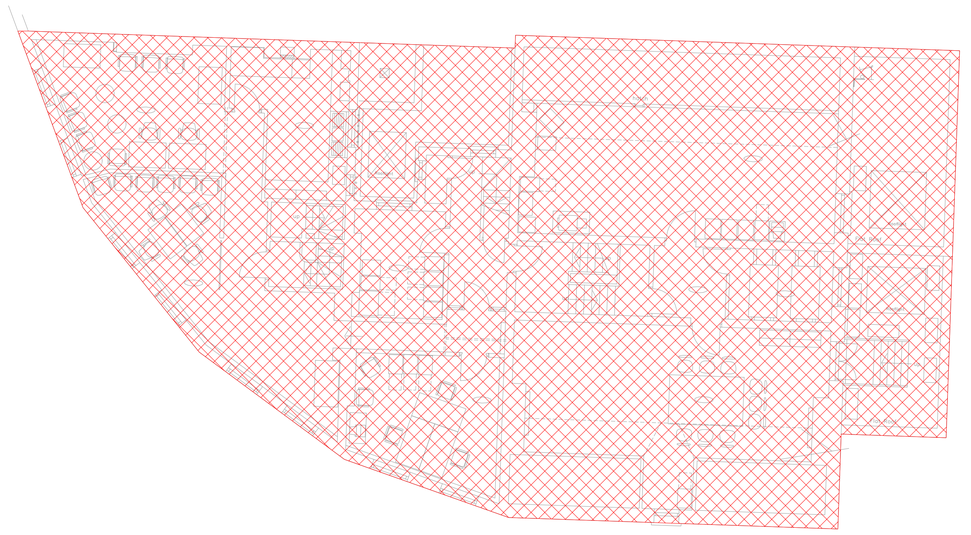

SCALE

0m 1m 2m 3m 4m 5m 6m 7m 8m 9m 10m

This document represents the intellectual property of Fagerhult Retail, and as a condition of issue may not be copied or used in connection with discussion involving any third part without our approval in writing.
The drawing represents a recommendation for installation of Fagerhult Retail Lighting equipment and may not form the basis of specification from an alternative supply source. Do not scale from drawing.
All dimensions to be verified by contractor on site prior to any works. **Fagerhult Lighting UK, 33-34 Dolben Street, London, SE1 0UQ Tel: +44 (0) 207 403 4123, Fax: +44 (0) 207 378 0906, www.Fagerhult.co.uk**

Lloyds Banking Group

FAGERHULT RETAIL

Lloyds Worthing South Street

COUNTRY: United Kingdom
CITY:
LOCATION:

FLOOR	SCALE
SF & TF	1:100 @ A1
DATE	
30/03/2023	
REV DATE	REV MARK
	0

PROJECT NO	COSTUMER NO	KEY ACOUNT MANAGER	LIGHTING DESIGNER
		DSw	JS