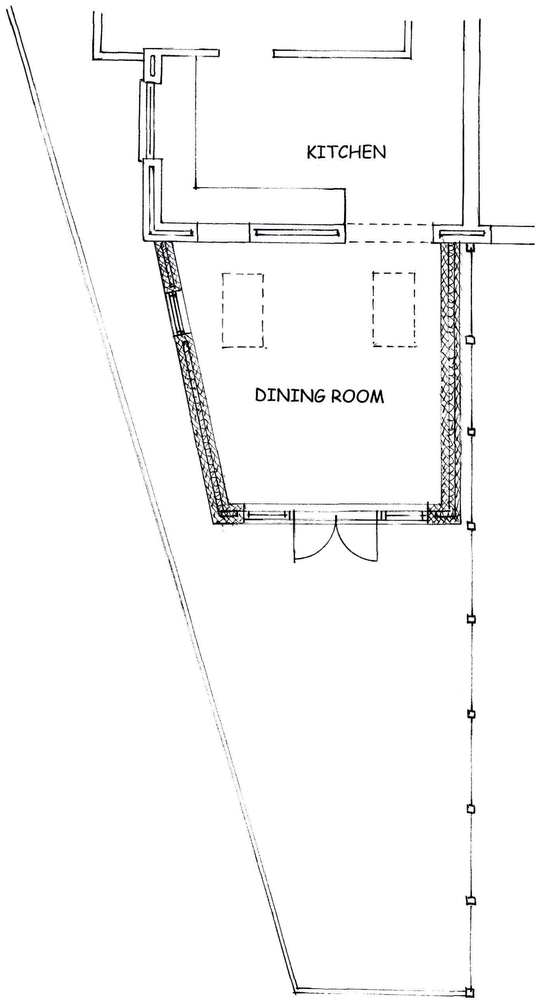

PROPOSED GROUND FLOOR PLAN 1:50

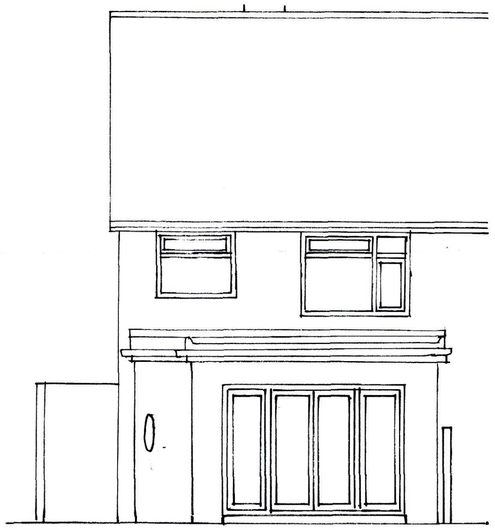

PROPOSED REAR ELEVATION 1:50

SUSPENDED BLOCK AND BEAM FLOOR
Remove top soil and vegetation, apply weed killer –
The underside of beams not less than 150mm above the top of the ground. PCC beams to be supplied and fixed to beam manufacturer's plan, layout and details (details and calculations to be sent to Building Control and approved before works commence). Minimum bearing 100mm onto DPC and load bearing walls. Provide concrete blocks to BS6073 pt.1, wet and grout all joints with 1:4 cement/sand mix. Provide double beams below non-load bearing partitions. Lay 1200g DPM/radon barrier, with 300mm laps double welted and taped at joints and service entry points using radon gas proof tape, over beam and block floor. Lay floor insulation over DPM, 75mm Celotex GA4000 applied as a rigid material.
Lay 500g separating layer over insulation and provide 75mm sand/cement screed over and prepare for floor finishes as required. The top surface of the ground cover under the building shall be above the finished level of the adjoining ground.
Ventilation - Provide cross-ventilation of the under floor to outside air by ventilators in at least 2 opposite external walls of the building. Ventilation openings having an opening area of 1500mm² per metre run of perimeter wall or 500mm² per square metre of floor area, whichever is the greater. Sleeper walls shall be of honeycombed construction or have provision for distribution of ventilation.

FULL FILL CAVITY WALL
To achieve minimum U Value of 0.28W/m²K
20mm two coat sand/cement render to comply to BS EN 13914-1:2005 with waterproof additive on 100mm block, K value 1.13, e.g. Lafarge Stancrete with fully filled cavity of 100mm Dritherm32 cavity insulation. Inner leaf to be 100mm block, K value 1.13, e.g. Lafarge Stancrete. Internal finish to be 12.5 mm plasterboard on dabs. Walls to be built with 1:1:6 cement mortar.

DPC
Provide horizontal strip polymer (hyload) damp proof course to both internal and external skins minimum 150mm above external ground level. New DPC to be made continuous with existing DPC's and with floor DPM. Vertical DPC to be installed at all reveals where cavity is closed.

VENTILATED FLAT ROOF
(imposed load max 1.0 kN/m² - dead load max 0.75 kN/m²)
To achieve U value of 0.18 W/m²K
Flat roof to be single ply membrane roofing with aa fire rating as specialist specification, with a current BBA or WIMLAS Certificate or mastic asphalte i.e.two layers of mastic asphalte laid breaking joints and built up to a min thickness of 20mm and should be laid to recommendations of BS8218 Mastic asphalte is laid over an isolating membrane of sheething felt laid loose with 50mm min overlaps on 22mm exterior grade plywood, laid on firrings to give a 1:40 fall on 47 x 195mm grade C24 joists at 400 ctrs max span 4.51m (see engineer's details for sizes). Cross-ventilation to be provided on opposing sides by a proprietary eaves ventilation strip equivalent to 25mm continuous ventilation, with fly proof screen. Flat roof insulation is to be continuous with the wall insulation but stopped back to allow a continuous 50mm air gap above the insulation for ventilation. Insulation to be 125mm Kingspan Thermapitch TP10 between joists and 25mm Kingspan under joists. Ceilings to be 12.5mm plasterboard over vapour barrier with skim plaster finish. Provide cavity tray where pitched roof meets existing wall. Provide restraint to flat roof by fixing using of 30 x 5 x 1000mm ms galvanised lateral restraint straps at maximum 2000mm centres fixed to 100 x 50mm wall plates and anchored to wall. Workmanship to comply to BS 8000:4.

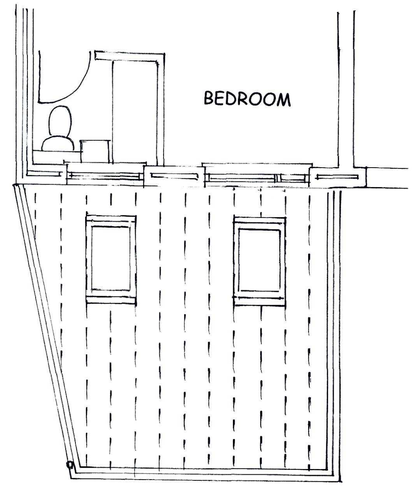

PROPOSED ROOF PLAN 1;50

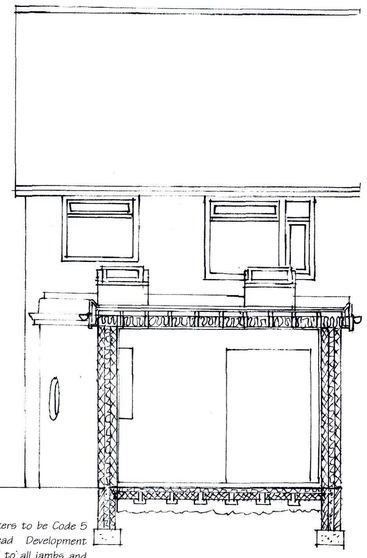

SECTION BB 1:50

LEAD WORK AND FLASHINGS
All lead flashings, any valleys or soakers to be Code 5 lead and laid according to Lead Development Association. Flashings to be provided to all jambs and below window openings with welded upstands. Joints to be lapped min 150mm and lead to be dressed 200mm under tiles, etc. All work to be undertaken in accordance

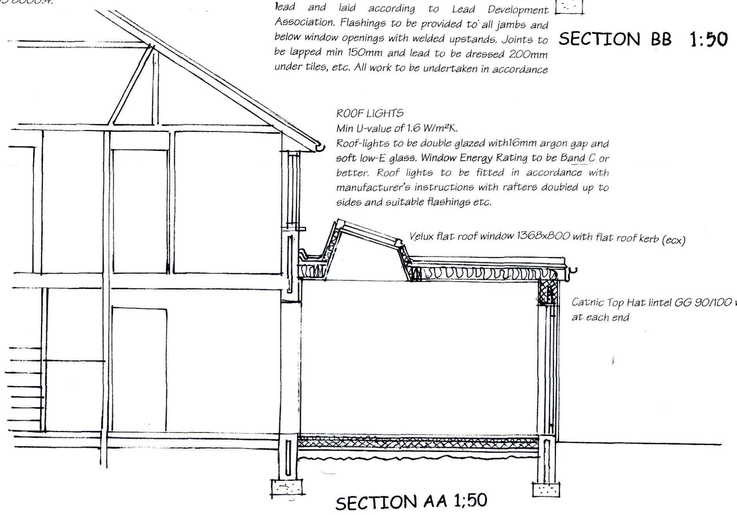

SECTION AA 1;50

ELECTRICAL
All electrical work required to meet the requirements of Part P (electrical safety) must be designed, installed, inspected and tested by a competent person registered under a competent person self certification scheme such as BRE certification Ltd, BSI, NICEIC Certification Services or Zurich Ltd. An appropriate BS7671 Electrical Installation Certificate is to be issued for the work by a person competent to do so. A copy of a certificate will be given to Building Control on completion.

HEATING
Extend all heating and hot water services from existing and provide new TVRs to radiators. Heating system to be designed, installed, tested and fully certified by a GAS SAFE registered specialist. All work to be in accordance with the Local Water Authorities bye laws, the Gas Safety (Installation and Use) Regulations 1998 and IEE Regulations.

NEW AND REPLACEMENT DOORS
New and replacement doors to achieve a U-Value of 1.80W/m²K. Glazed areas to be double glazed with 16mm argon gap and soft low-E glass. Glass to be toughened or laminated safety glass to BS 6206, BS EN 14179 or

BS EN ISO 12543-1:2011 and Part K (Part N in Wales) of the current Building Regulations.

UNDERGROUND FOUL DRAINAGE
Underground drainage to consist of 100mm diameter UPVC proprietary pipe work to give a 1:40 fall. Surround pipes in 100mm pea shingle. Provide 600mm suitable cover (900mm under drives). Shallow pipes to be covered with 100mm reinforced concrete slab over compressible material. Provide rodding access at all changes of direction and junctions. All below ground drainage to comply with BS EN 1401-1: 2009.

STRIP FOUNDATION
Provide 225mm x 600mm concrete foundation, concrete mix to conform to BS EN 206-1 and BS 8500-2. All foundations to be a minimum of 1000mm below ground level, exact depth to be agreed on site with Building Control Officer to suit site conditions. All constructed in accordance with 2004 Building Regulations A1/2 and BS 8004:1986 Code of Practice for Foundations. Ensure foundations are constructed below invert level of any adjacent drains. Base of foundations supporting internal walls to be min 600mm below ground level. Sulphate resistant cement to be used if required. Please note that should any adverse soil conditions be found or any major tree roots in excavations, the Building Control Officer is to be contacted and the advice of a structural engineer should be sought.

WALL TIES
All walls constructed using stainless steel vertical twist type retaining wall ties built in at 750mm ctrs horizontally, 450mm vertically and 225mm ctrs at reveals and corners in staggered rows. Wall ties to be suitable for cavity width and in accordance with BS 5268-6.1: 1996 and BS EN 845-1: 2003

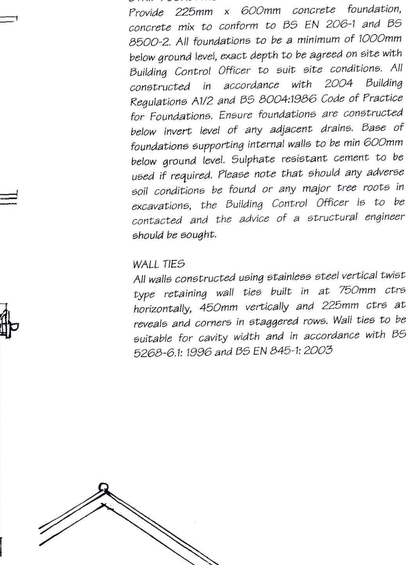

PROPOSED SIDE ELEVATION 1;50



LOCATION PLAN 1:2000

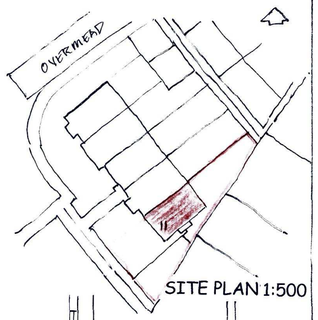

SITE PLAN 1:500



EXISTING GROUND FLOOR PLAN 1:100



EXISTING FIRST FLOOR PLAN 1:100

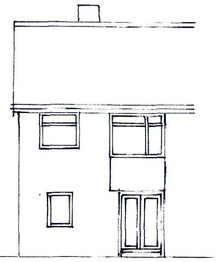

EXISTING REAR ELEVATION 1:100

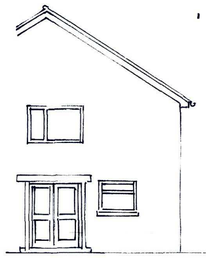

EXISTING SIDE ELEVATION 1:100

NOTES

All dimensions must be checked on site and not scaled from this drawing

PARTY WALL ACT
The owner, should they need to do so under the requirements of the Party Wall Act 1996, has a duty to serve a Party Structure Notice on any adjoining owner if building work on, to or near an existing Party Wall involves any of the following:
- *Support of beam*
- *Insertion of DPC through wall*
- *Raising a wall or cutting off projections*
- *Demolition and rebuilding*
- *Underpinning*
- *Insertion of lead flashings*
- *Excavations within 3 meters of an existing structure where the new foundations will go deeper than adjoining foundations, or within 6 meters of an existing structure where the new foundations are within a 45 degree line of the adjoining foundations.*

A Party Wall Agreement is to be in place prior to start of works on site.

SITE PREPARATION
Ground to be prepared for new works by removing all unsuitable material, vegetable matter and tree or shrub roots to a suitable depth to prevent future growth. Seal up, cap off, disconnect and remove existing redundant services as necessary. Reasonable precautions must also be taken to avoid danger to health and safety caused by contaminants and ground gases e.g. landfill gases, radon, vapours etc. on or in the ground covered, or to be covered by the building.

STRIP FOUNDATION
Provide 225mm x 600mm concrete foundation, concrete mix to conform to BS EN 206-1 and BS 8500-2. All foundations to be a minimum of 1000mm below ground level, exact depth to be agreed on site with Building Control Officer to suit site conditions. All constructed in accordance with 2004 Building Regulations A1/2 and BS 8004:1986 Code of Practice for Foundations. Ensure foundations are constructed below invert level of any adjacent drains. Base of foundations supporting internal walls to be min 600mm below ground level. Sulphate resistant cement to be used if required. Please note that should any adverse soil conditions be found or any major tree roots in excavations, the Building Control Officer is to be contacted and the advice of a structural engineer should be sought.

Date	Revisions

JOHN BRADBURY FSA1
ARCHITECTURAL CONSULTANT

123 GREENACRES
SHOREHAM BY SEA
BN43 5XL

TEL 01273 446424
MOBILE 07799560222

Client

Job Title
Proposed extension to
11 Overmead
Shoreham by Sea
BN43 5NS

Drawing Title
Plans Sections and Elevations

ADUR & WORTHING PLANNING SERVICES
PLAN AWDM/0232/14
DATE
VALID 24 FEB 2014

Scale · 1:50 1:100 1:500 1:2000

D. February 2014 | Drawn by JB

Drg No | Rev
Job 41 Drg No 01