
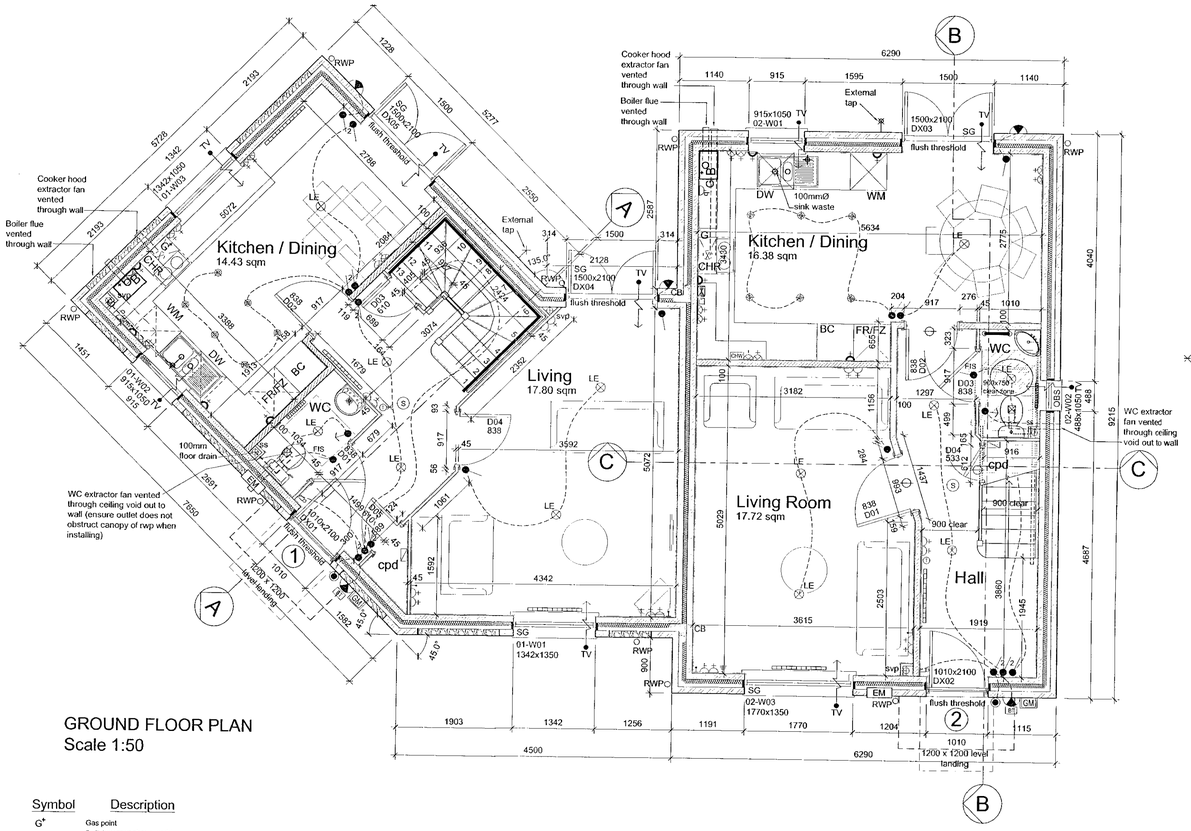


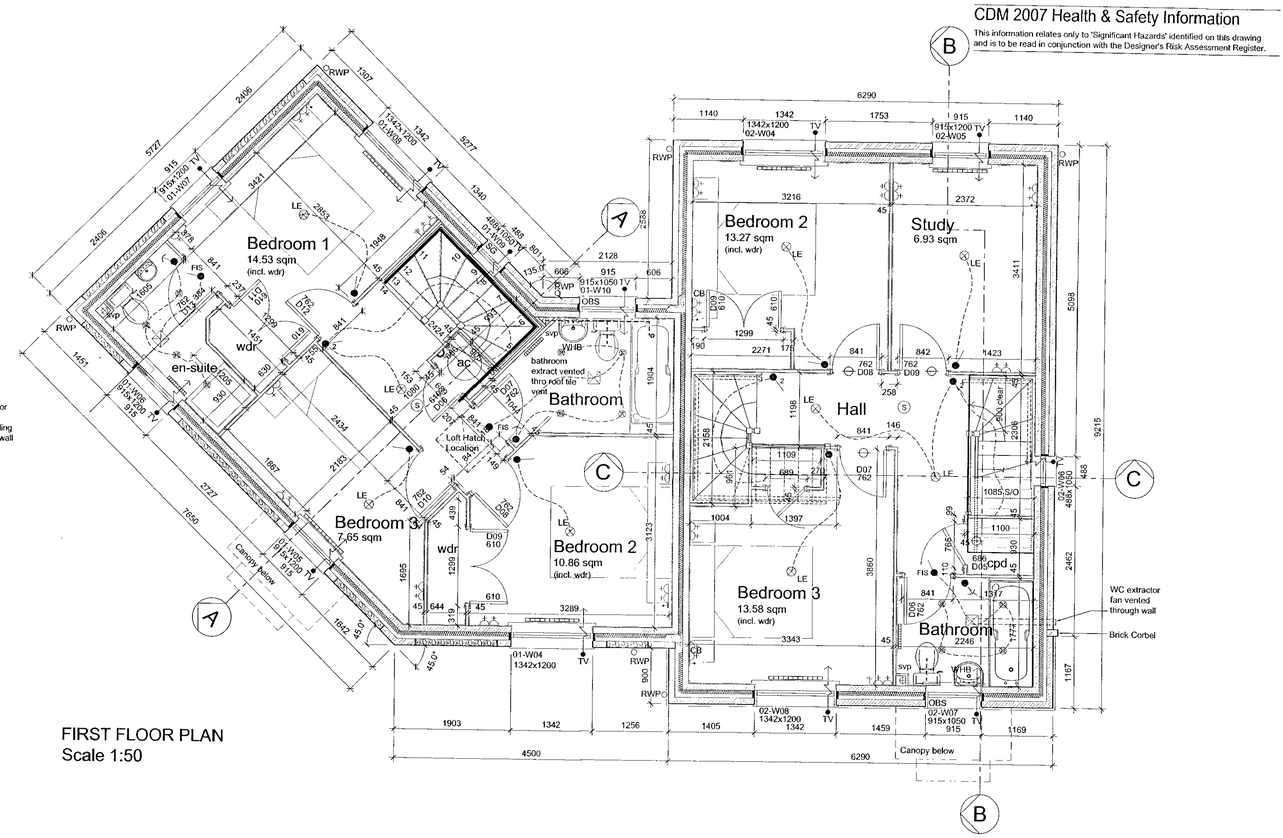

Symbol	Description
G*	Gas point
	Switched spur above worktop for boiler
	13 Amp twin switched socket outlet
	13 Amp twin switched socket outlet above worktop
	Switches to fridge and w/machine to have pilot light and appliance engraved
	Switched spur above worktop controlling unswitched socket below worktop
	13 Amp fused switched spur unit
	Immersion heater switch with neon indicator
	shaver socket with light fitting
	Two way switch
	One way switch 'n' indicates gangs
	Pull cord ceiling switch
FIS	Extract fan isolation switch at high level.
	Telephone point
	Television point
	Cooker 8ex outlet plate (750 mm above F.F.L.)
	Cooker switch (1200 mm above F.F.L.)
	Consumer service unit
EM	Electric Meter
GM	Gas Meter
BT	British Telecoms intake adaptable box.
CHW	Central Heating wiring junction box with programmer
	Door Bell mains operated
	Low energy ceiling lighting point, batten type
	Low energy ceiling lighting point, pendant type
	Low energy recessed downlighter
	Low energy wall light
	Bell Push
	Room Thermostat
EF	Extract fan (with maintenance switch at high level and pull cord operation for boost or boost switch at worktop/low level)
	SECURITY LIGHT 2D IP rated fitting with PIR detector (AUTOMATIC SWITCHING) wall mounted with forward throw. (FOR LOCATION OF ADDITIONAL EXTERNAL LIGHTS SEE LANDSCAPING DRAWING)
	Low energy fluorescent light fitting (with diffuser)
S	Smoke Detector
	cavity barrier
LE	INDICATES LOW ENERGY FITTING
EF	Ceiling mounted extract fan (with maintenance switch at high level and pull cord operation for boost switch at worktop/low level)

NOTES


ACCESSORIES INSIDE DWELLINGS TO BE MOUNTED AT THE FOLLOWING HEIGHTS :	
CONSUMER CONTROL UNIT	1200MM ABOVE FINISHED FLOOR
LAMPHOLDERS	2000MM TO BOTTOM OF HOLDER
LIGHTING SWITCHES	1200 ABOVE FINISHED FLOOR
IMMERSION HEATER CONTROL SWITCH	1200MM ABOVE FINISHED FLOOR
COOKER CONTROL UNIT	225MM ABOVE WORKTOP
KITCHEN SOCKET OUTLETS (ABOVE WORKTOP)	225MM ABOVE WORKTOP
ROOM THERMOSTATE	1200MM ABOVE FINISHED FLOOR
TELEVISION RECEPTION OUTLET	450MM ABOVE FINISHED FLOOR
TELEPHONE POINT	450MM ABOVE FINISHED FLOOR
RADIATOR SIZES ARE INDICATIVE	

Legend

	FD 30 door with self closer
	FD 30 door
SG	Safety glass - BS 6206:1981
CHR	Cooker hood extract fan
B	Boiler flue
WM	Space for Washing Machine under
FF	Space for Fridge Freezer
BC	Broom Cupboard
OBS	Obscure glazing to windows / rooflights
E	Escape Window
	External tap
	Span direction of floors - ground floor and floor joist to first floor
	Radiator location - radiator position and size is indicative only and subject to specialist information and design.
TV	Background Trickle vent to window door opening

NOTE: Extent and location of internal loadbearing walls to be confirmed by structural engineer.

Important Note:
Dimensions are measured to the structural stud face of walls/LB partitions, ie. plasterboard finishes are ignored.

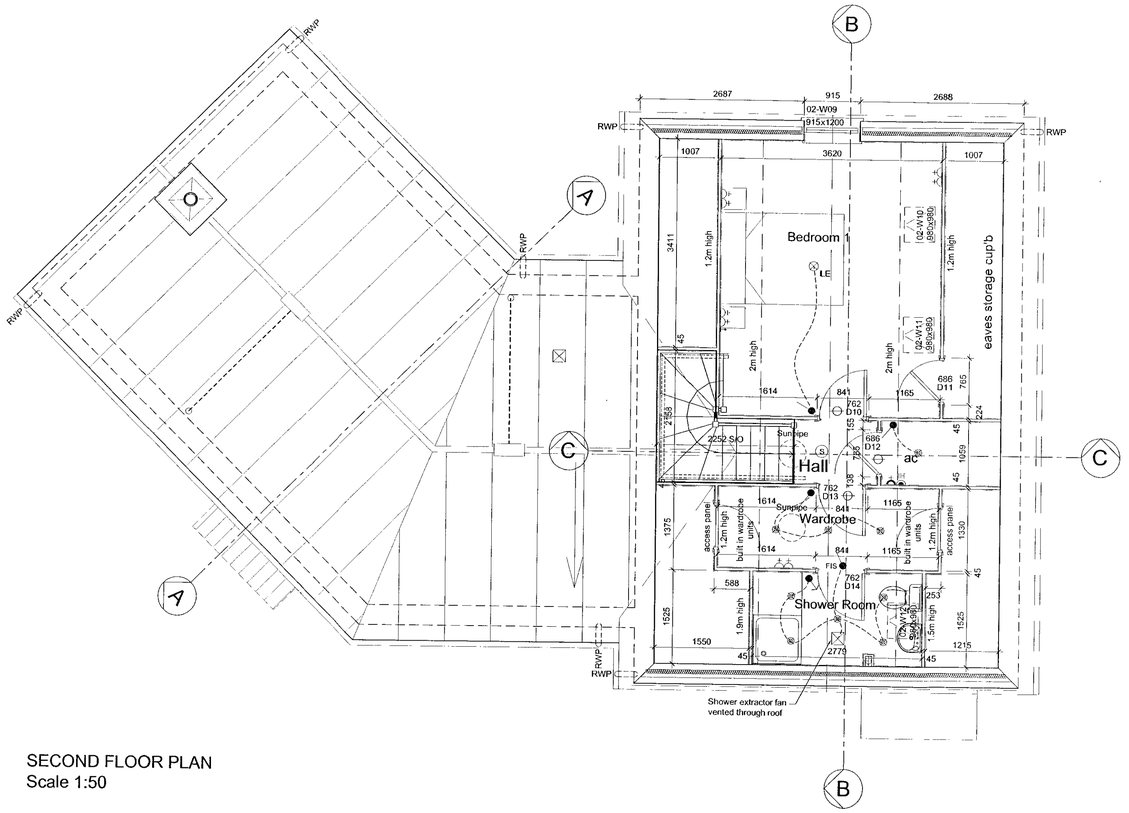

Awnbarn

Rev	Date	Revision Details	Dr	Ch
C	09.12.11	Sun pipes & wardrobes added and velux windows reduced	sw	sh
B	21.11.11	Construction Issue	sw	sh
A	14.11.11	Preliminary Issue	sw	acc

London: Unit 1 West Coate House 3 Coate Street London E2 9AG
T 020 7729 5505 E london@ecearchitecture.com

Sussex: Brooklyn Chambers 11 Goring Road Worthing West Sussex BN12 4AP
T 01903 248777 E sussex@ecearchitecture.com

www.ecearchitecture.com

ECE Architecture

Client's Name
STRATTON LTD.

Job Title
THE BALL TREE INN, BUSTICLE LANE, SOMPTING

Drawing Title
PLOTS 1 & 2
FLOOR PLANS

Scale
1:50 @ A1 / 1:100 @ A3

metres 1 2 3 4 5

Drawn	Checked	Date
MB	SH	01.08.11

Job No	Drawing No	Rev
5511	L(01)100	C

Status
CONSTRUCTION

CAD Plot date: 30/1/2012 - 11:42:11
5511-wd-plots 1-6.dwg

© ECE Architecture Limited. No dimensions to be scaled from drawing except for the purposes of Planning Applications. The contractor should check all dimensions on site. It is the contractors responsibility to ensure compliance with Building Regulations.