


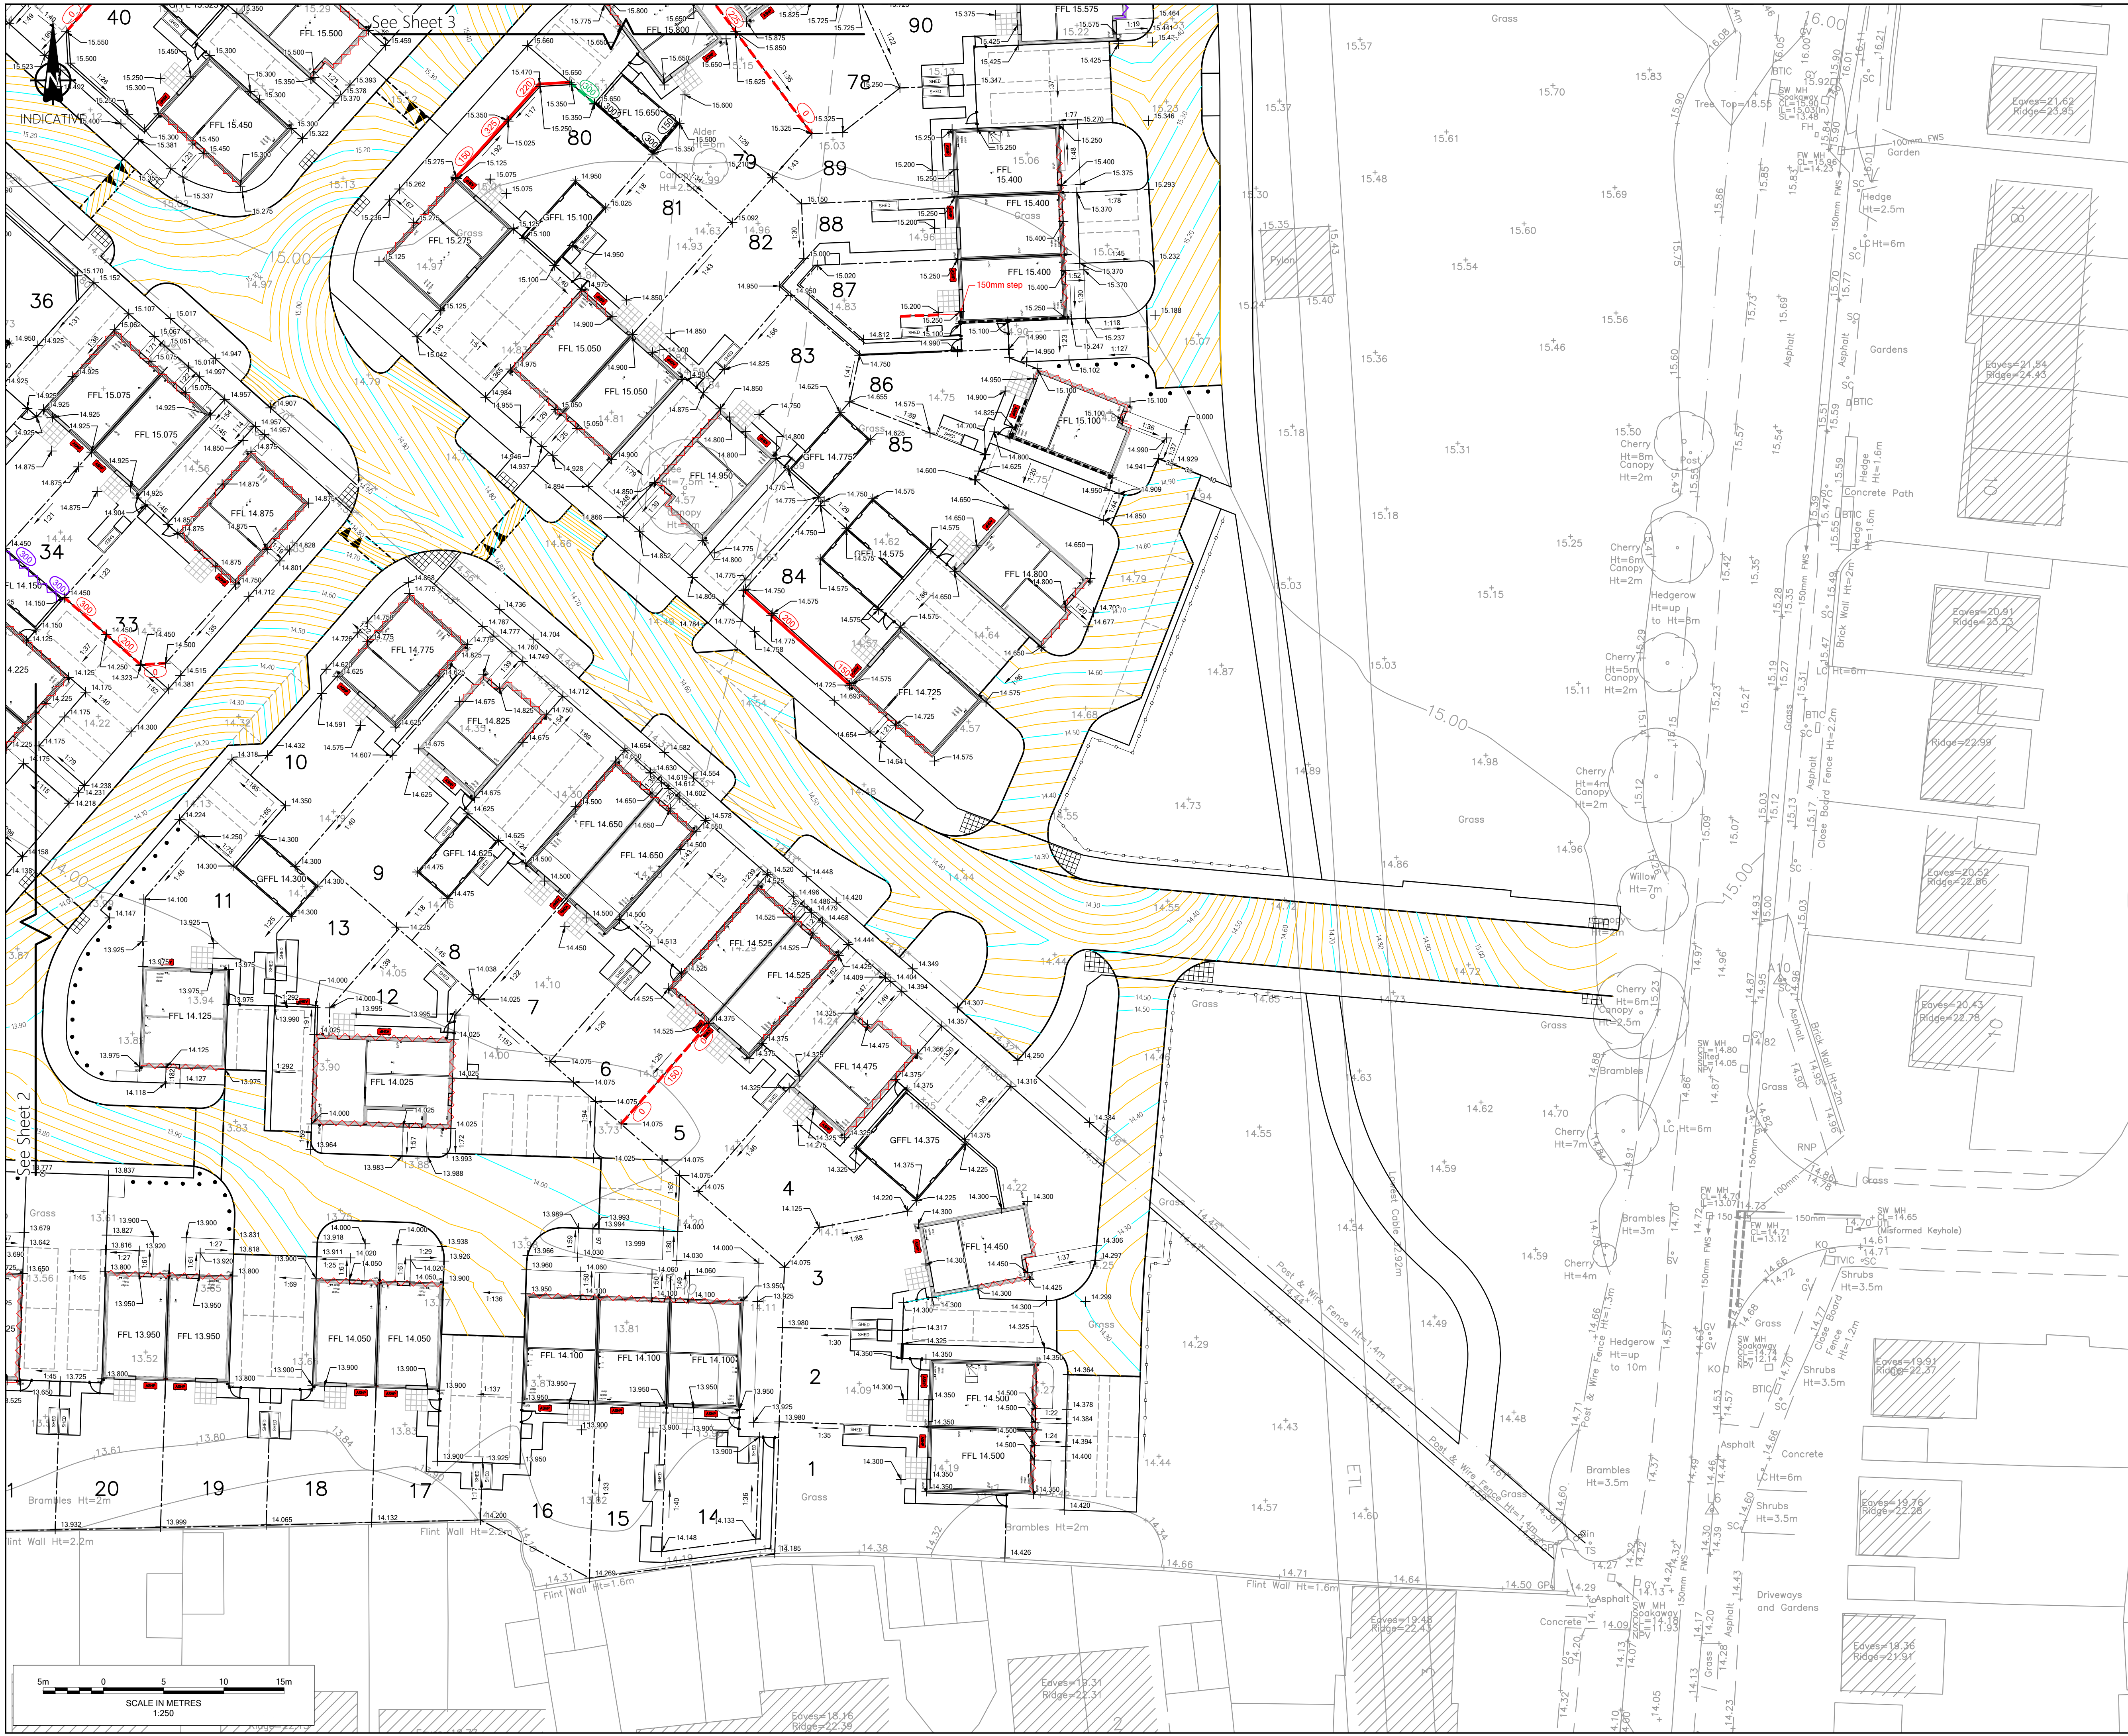

**Notes**

- Do not scale from this drawing. All dimensions shown are in metres unless noted otherwise.
- This drawing has been based upon topographical survey information produced by Brunel Surveys Ltd and Milton Keynes Surveys Ltd and Milestone Transport Planning cannot be held responsible for any discrepancies which may arise because of it.
- Retaining wall height between 0-575mm are to be Type RW1. Retaining walls adjacent to driveway to be RWD1. Refer to Persimmon Standard Detail drawing Retaining Wall 1000.

**Key**

- Major Contour 0.10m
- Minor Contour 0.02m
- Retaining Wall
- Gravel Board Retaining Feature
- Geowall precast timber effect retaining wall to manufacturer's specification
- Underbuild
- 150mm Stepped DPC
- Stepped DPC Above FFL
- Gradient

**TENDER**

Ordnance Survey Licence number: 100057360

| Drawing Revisions |     |            |                                       |      |      |
|-------------------|-----|------------|---------------------------------------|------|------|
| Rev:              | Dm: | Date:      | Details:                              | Chk: | App: |
| P01               | AM  | 29/08/2025 | First issue                           | LP   | BM   |
| P02               | JB  | 24/09/2025 | New retaining wall type included      | LP   | BM   |
| P03               | JB  | 30/09/2025 | Issued for tender                     | LP   | BM   |
| P04               | AM  | 26/11/2025 | Retaining walls amended Lots 84,85&86 | LP   | BM   |

**Client**

Persimmon Homes  
Thames Valley

**Project**

West Sompting, West Sussex

**Title**

Phase 2 Levels Layout  
Sheet 1 of 3

**MILESTONE**  
TRANSPORT PLANNING  
7 Ancells Court, Rye Close, Fleet, Hampshire, GU51 2UY  
Tel: 01483 397888  
Gateshead IBC, Mulgrave Terrace, Gateshead, NE8 1AN  
Tel: 0191 338 7220  
3 Wharfside Street, Spaces The Mailbox Level 1, Birmingham, B1 1RD  
Tel: 0121 661 9881  
web: www.milestonetp.co.uk

**Scale**

1:250 @ A1

**Revision**

P04

**Drawing Number**

611-0601