


Post sign
traditional black steel signbracket with hanging panel on 100mm square wooden pressure treated post
5mm thickness powder coated RAL 6012 aluminium panel sized at 600mm x 960mm
sign to be positioned with the panel hanging on the inside of the fence line, facing in towards the building
permanent vinyl grahics in cream and white applied to powder coated signpanel


1:5 scale



1:5 scale

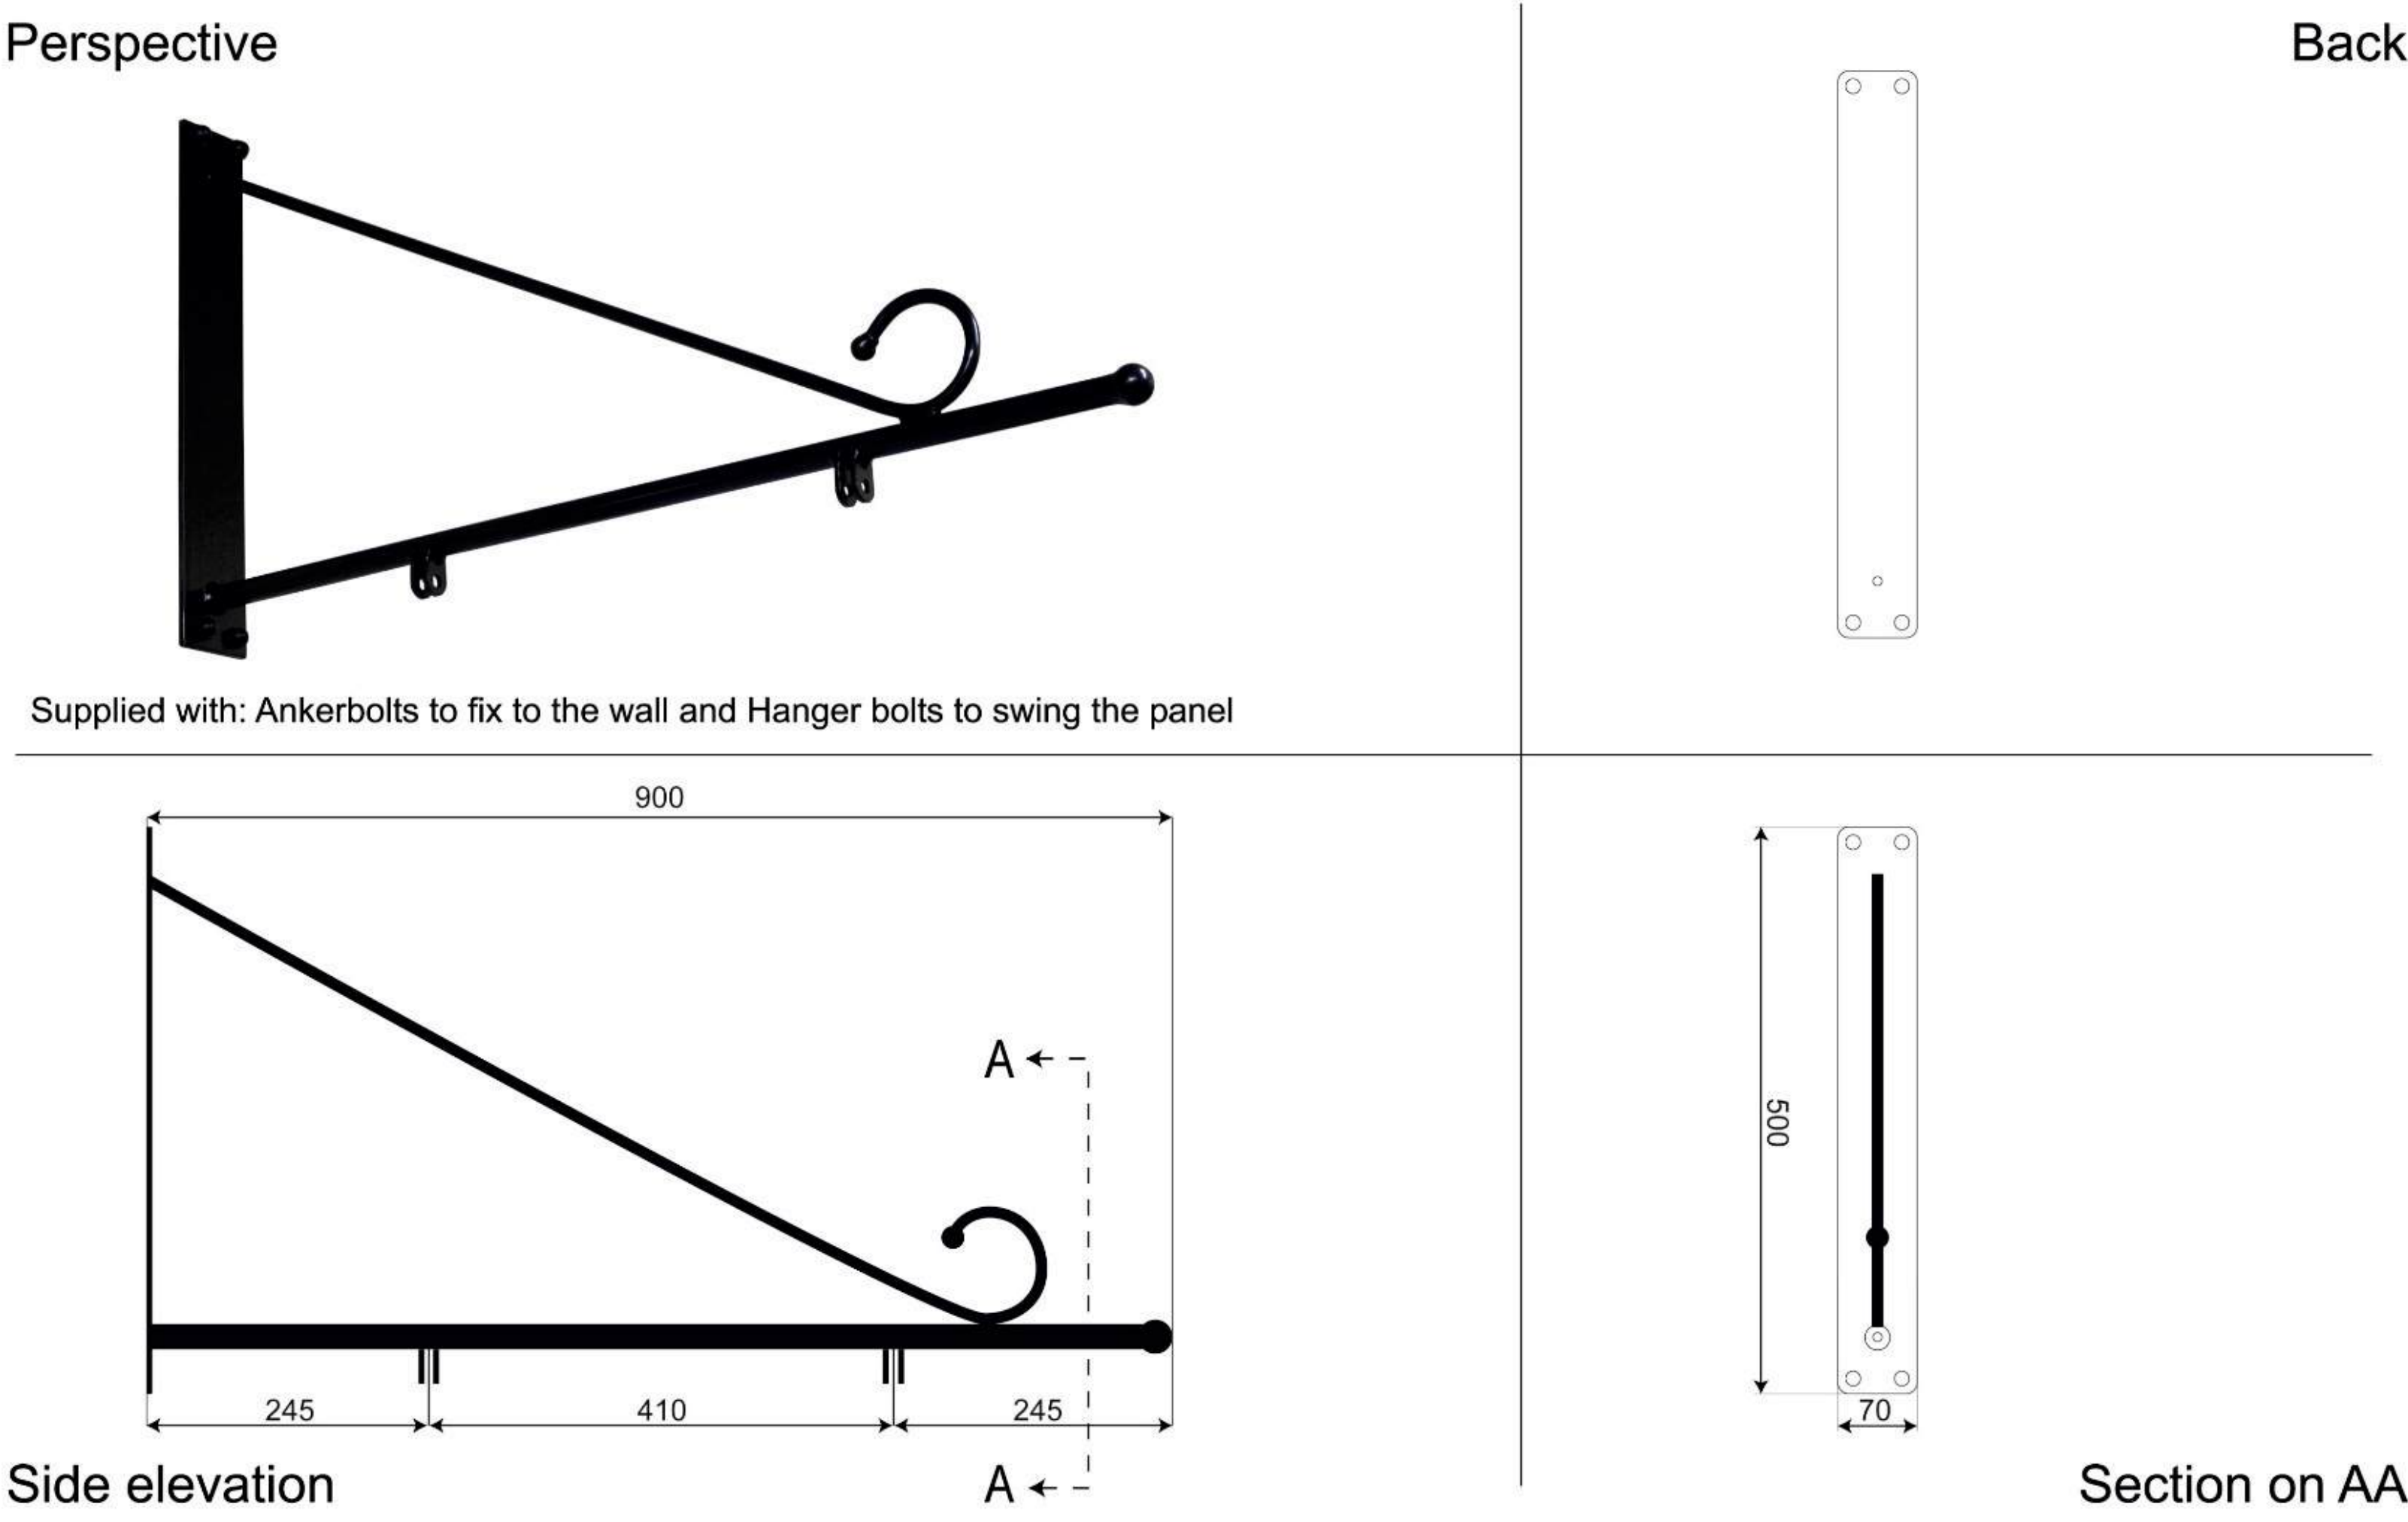


1:5 scale

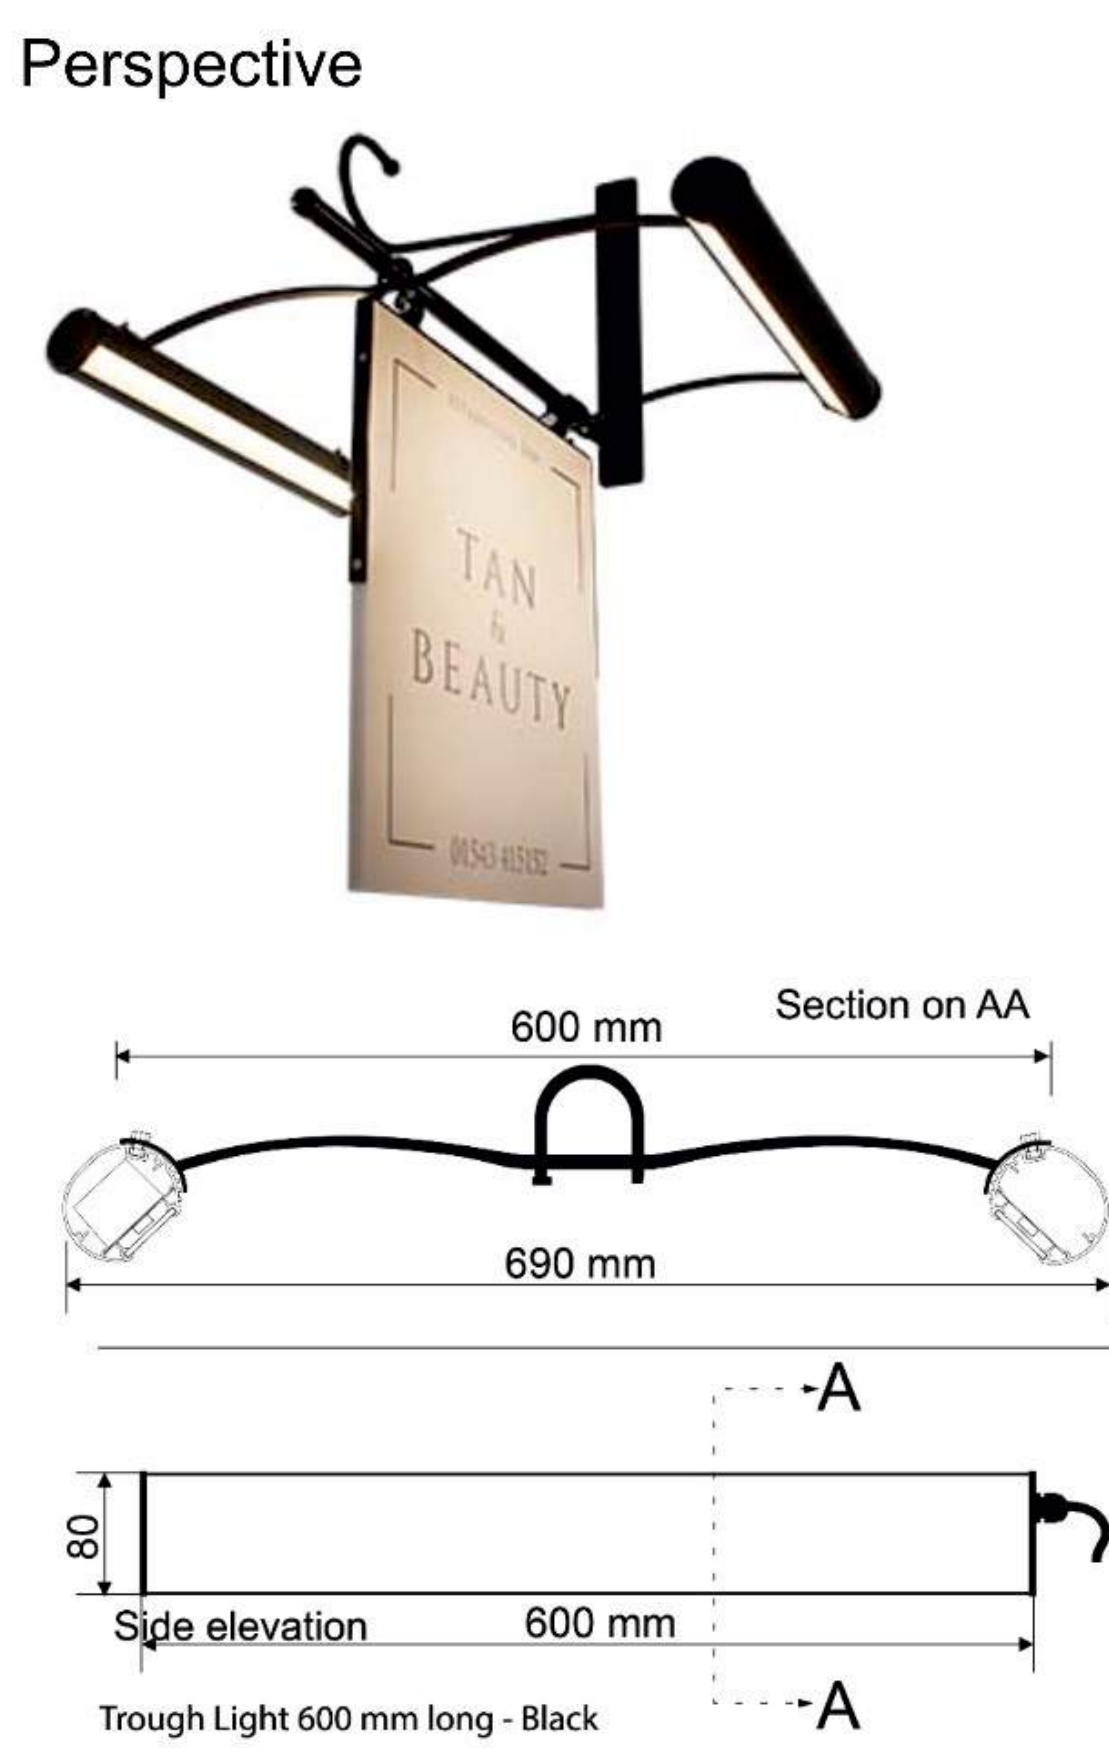


PICTORIAL LIGHTING FOR POST SIGN
Class 2 IP67 rated Power Supply, 24v, 20W (35w on 800 & 900mm pictorials)
Input:- 100-240v 0.55A 50/60Hz (35w 1.1A)
Output: +24v 0.84A (35w 1.5a)
Mounted inside the aluminium case
Light Strip:- High Bright

IP67 rated Commercial Grade 24 volt, 12w per metre
60 2835 SMD LED chips per metre, 1440 lumens per metre
Colours:- Cool White (6000k)
Mounted inside the aluminium case

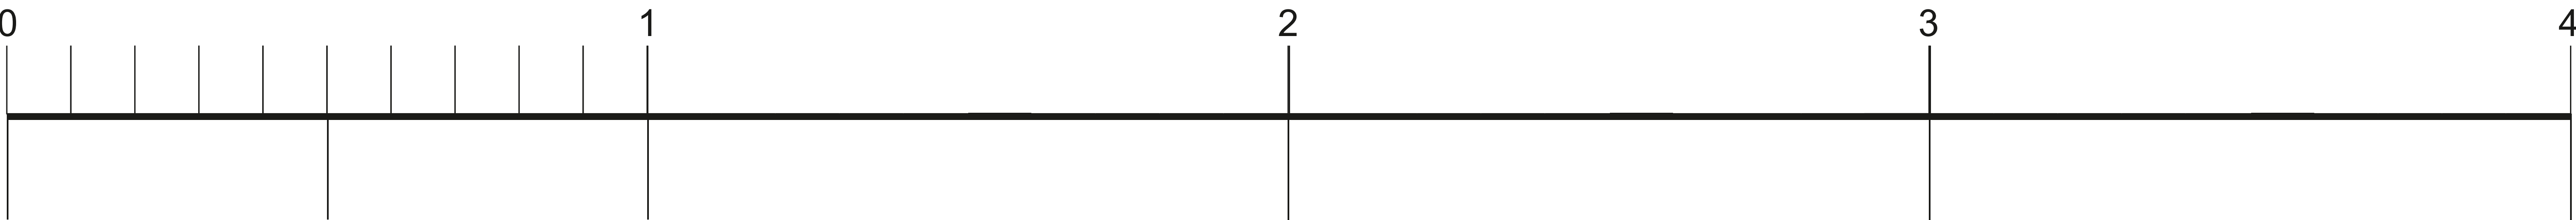



1:5 SCALE BAR

Eye Level Plaza style post sign
Powder coated aluminium signtray fitted between x2 powder coated aluminium square posts - all RAL colour 6012
permanent vinyl grahics in cream and white applied to powder coated signpanel

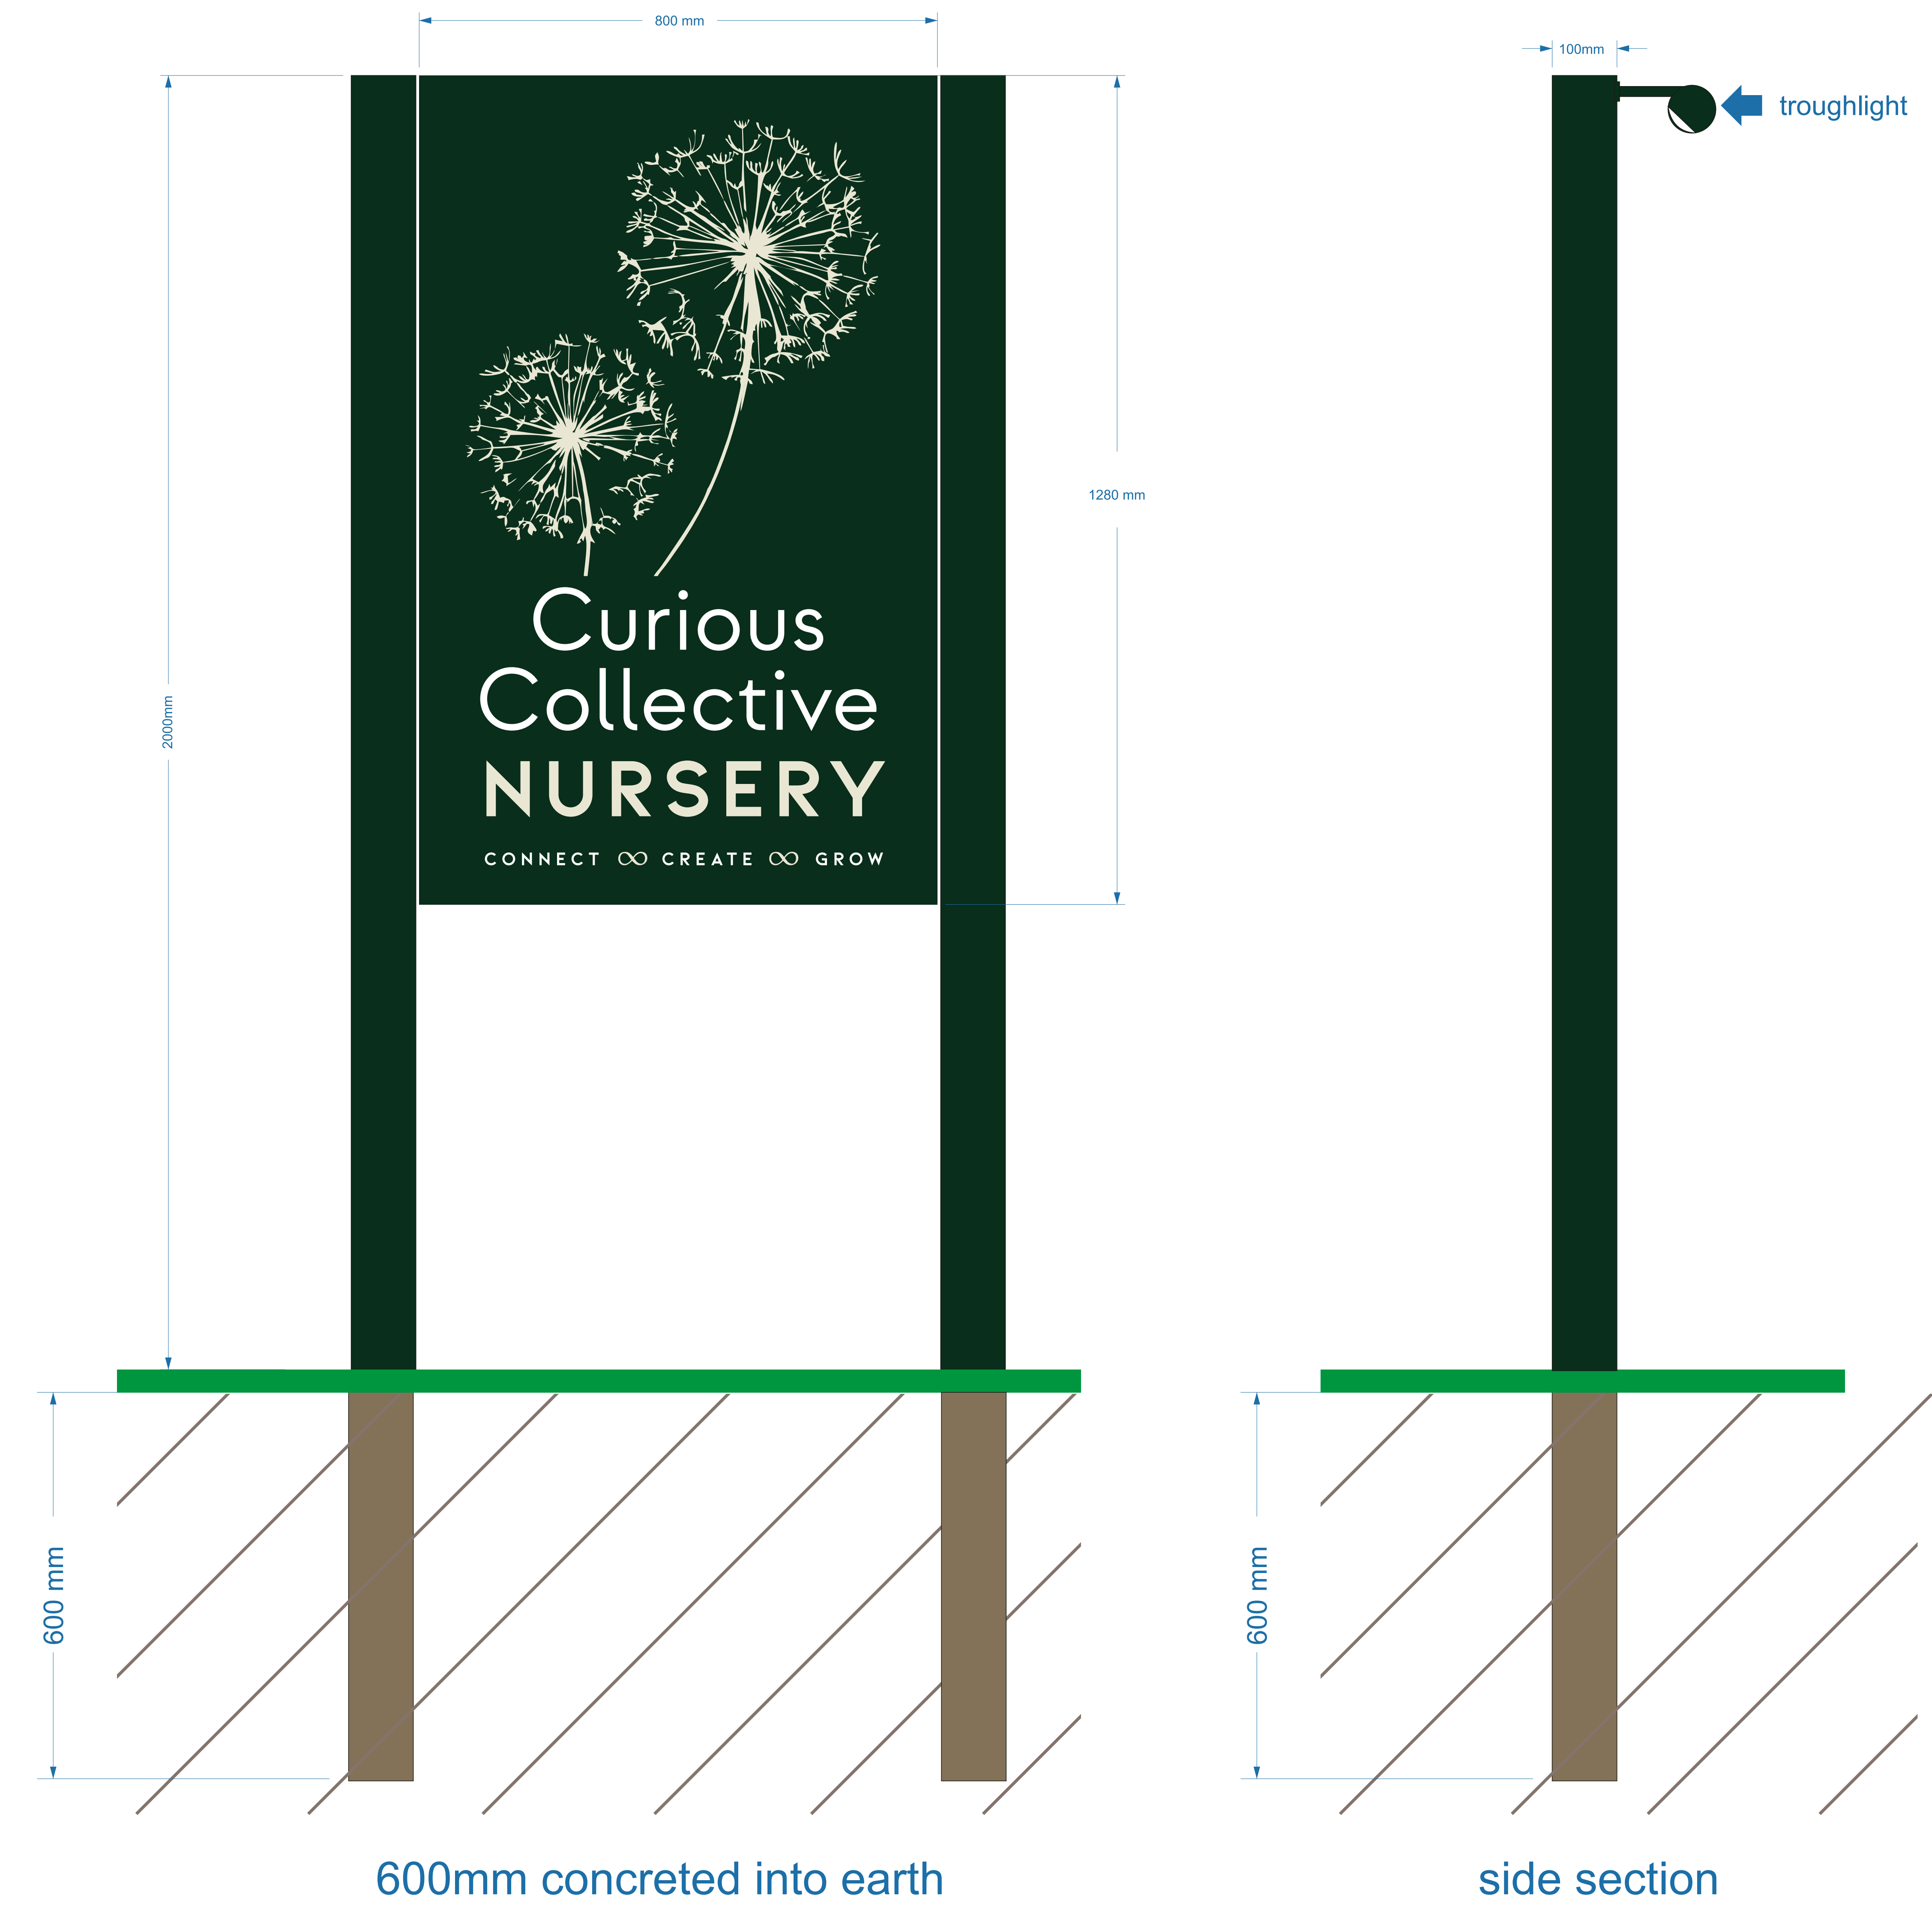


Troughlight for top of plaza sign

- LED strip** Only 7.7 Watts/metre power consumption delivering 47% energy saving
High Efficacy LED 195 lm/W
104 LEDs per metre
ERP Class B
24-volt input, less current less voltage drop.
6000k cool white or 3000k warm white 120° angle
IP54 protected, 50,000 hours+ lamp life
5-year Warranty
Full CE certification and ROHS compliant
- Drivers** Tier 1 Meanwell and PowerLED drivers
Fully serviceable quick release slide in Gear Trays
Epoxy encapsulated fully isolated case with IP67 protection
Constant voltage design
Short circuit, over current, over voltage protection
5-year Warranty
Full CE certification and ROHS compliant
- Light Fitting** Specially designed 58mm CYCAL 80 Certified low carbon aluminium extrusion
supplied up to 6000mm lengths
Powdura ECO high performance polyester resin coating
Concealed rear cable entry
New 'RAPIDFIT' die cast connectors for forming longer runs
Die cast aluminium end caps
Standard 300mm multi brackets
MAKROLON RE Snap-in polycarbonate 90° magnifying lens ISCC+ certified
Casing sealed and certificated to IP66
TM66 2.6 certified
Full CE certificate and 5-year parts warranty
Conforms to BS EN 60598-1:2015 and BS EN 60598-2-1:1989 'UK Deviations Only'

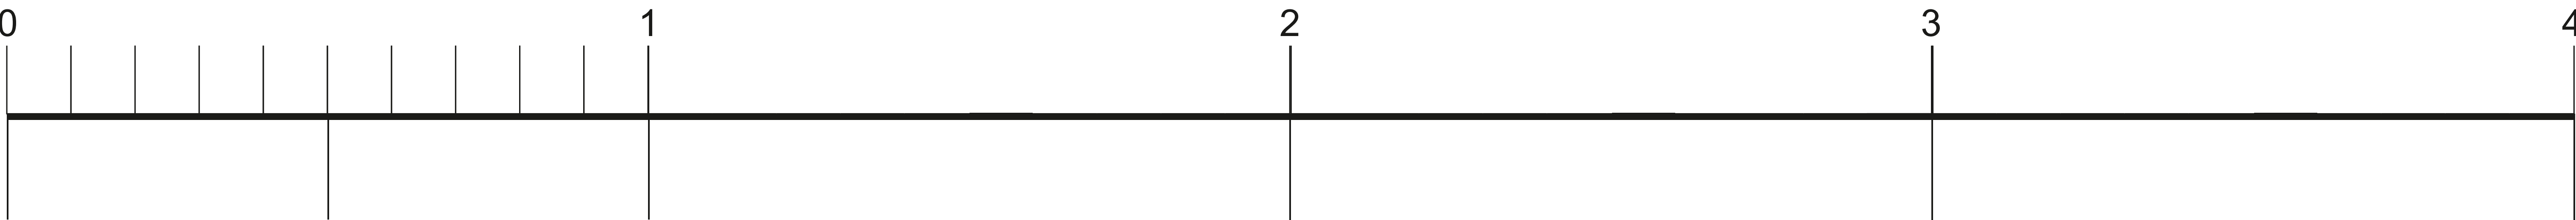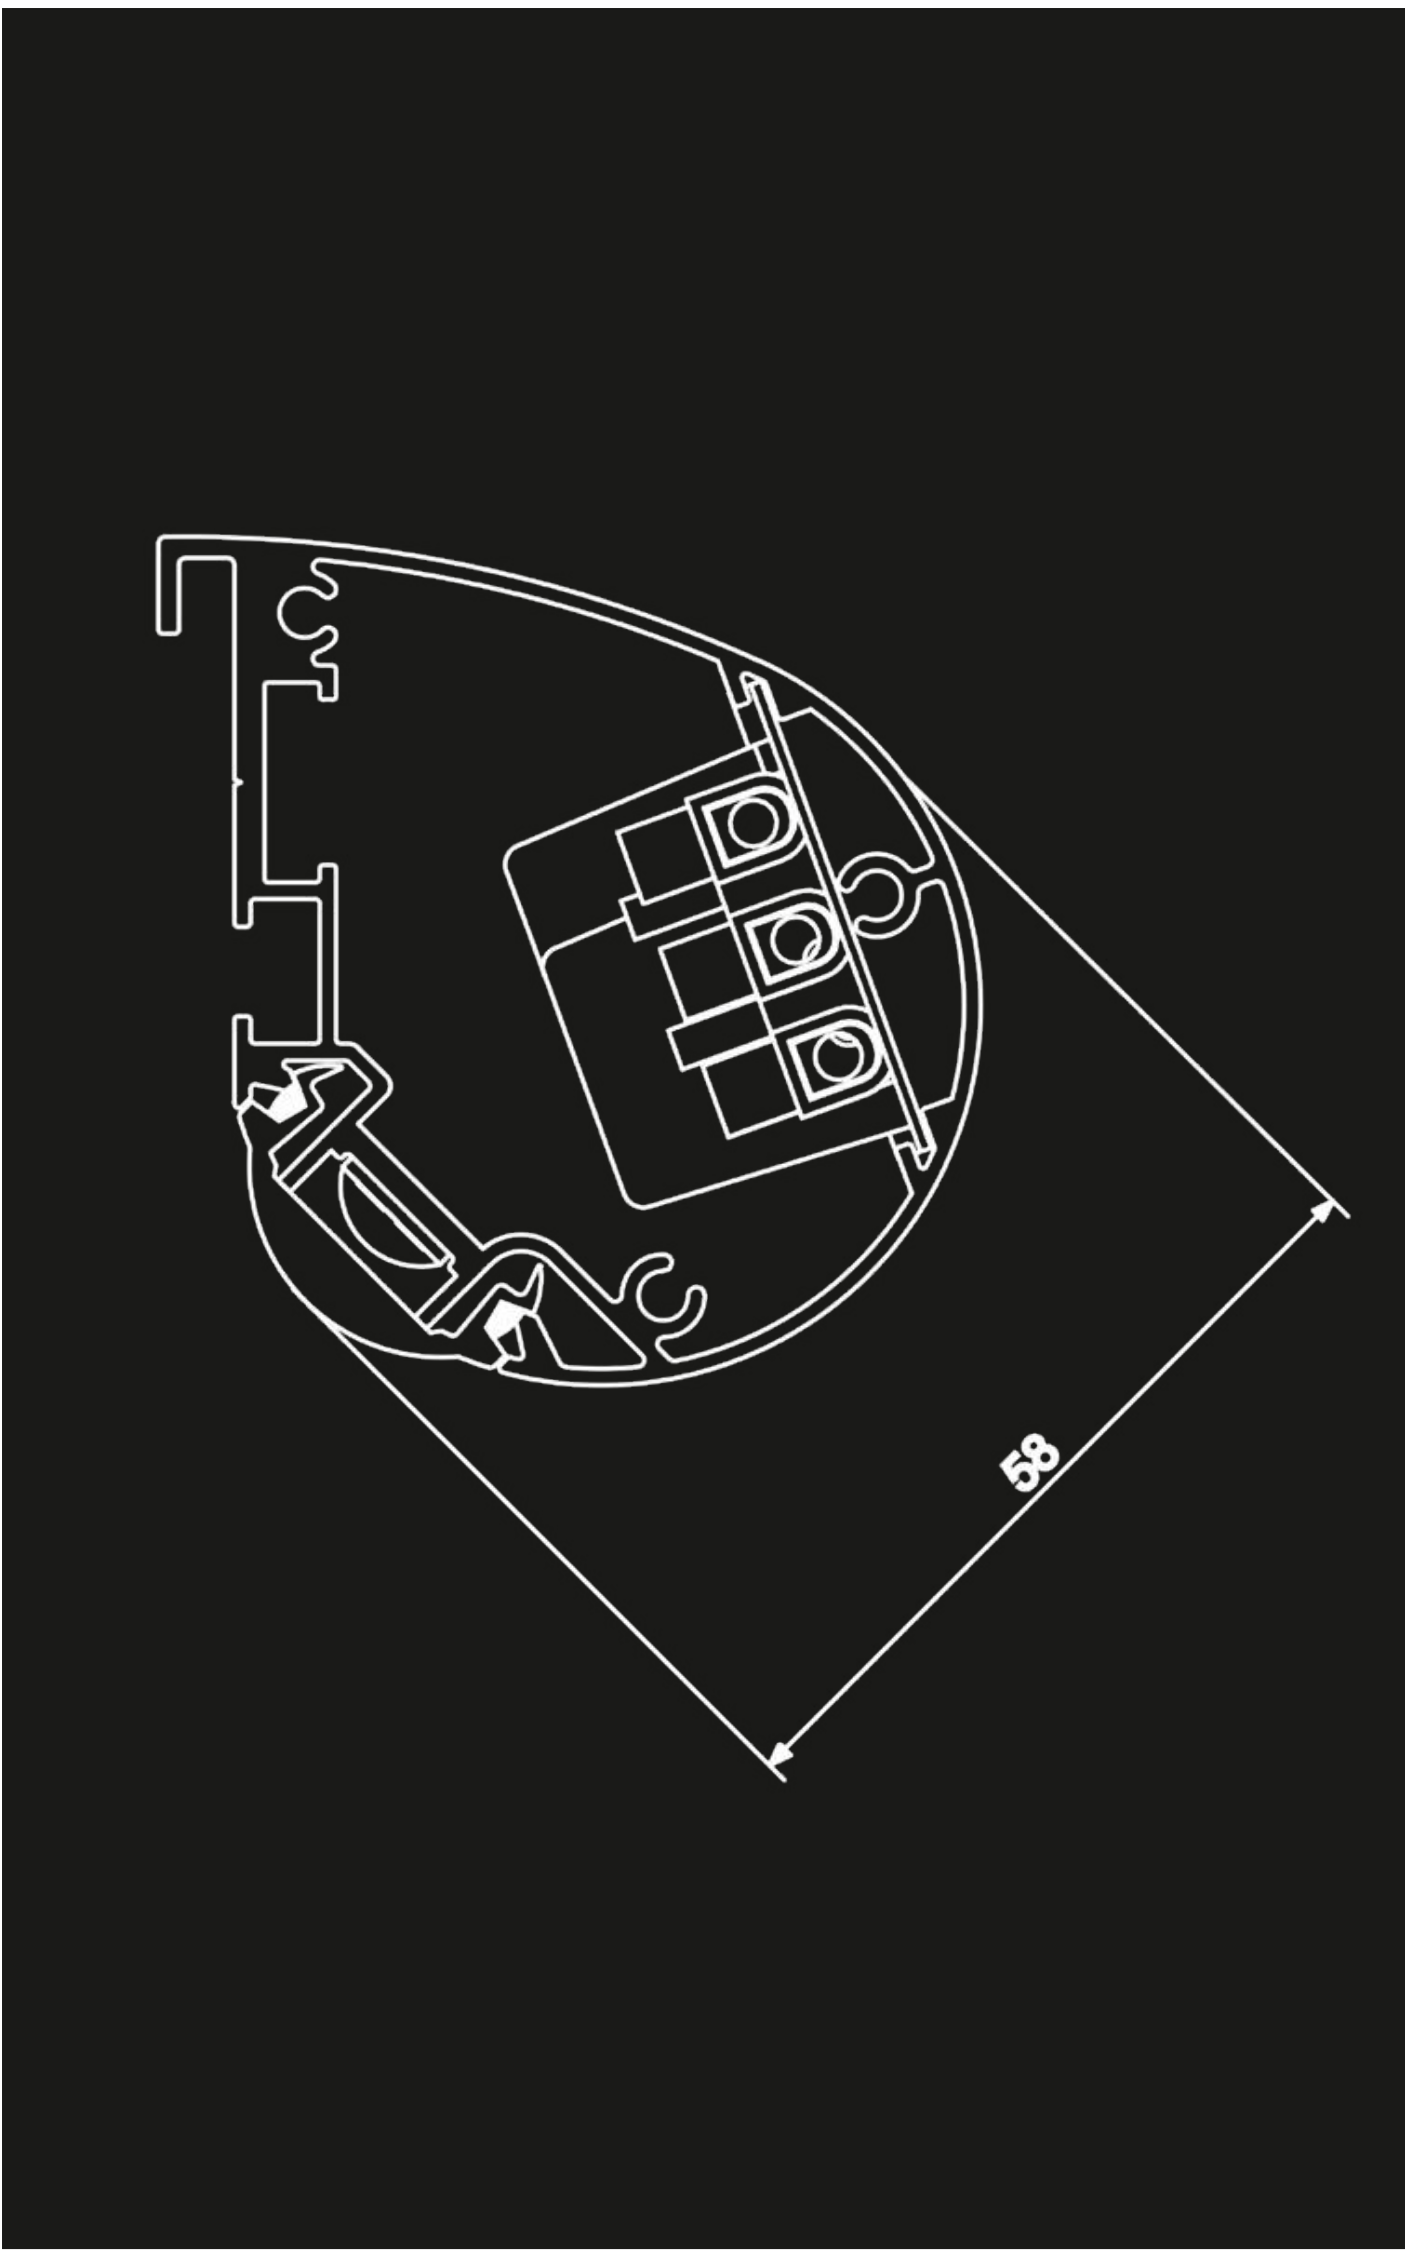



1:5 SCALE BAR

Perspective

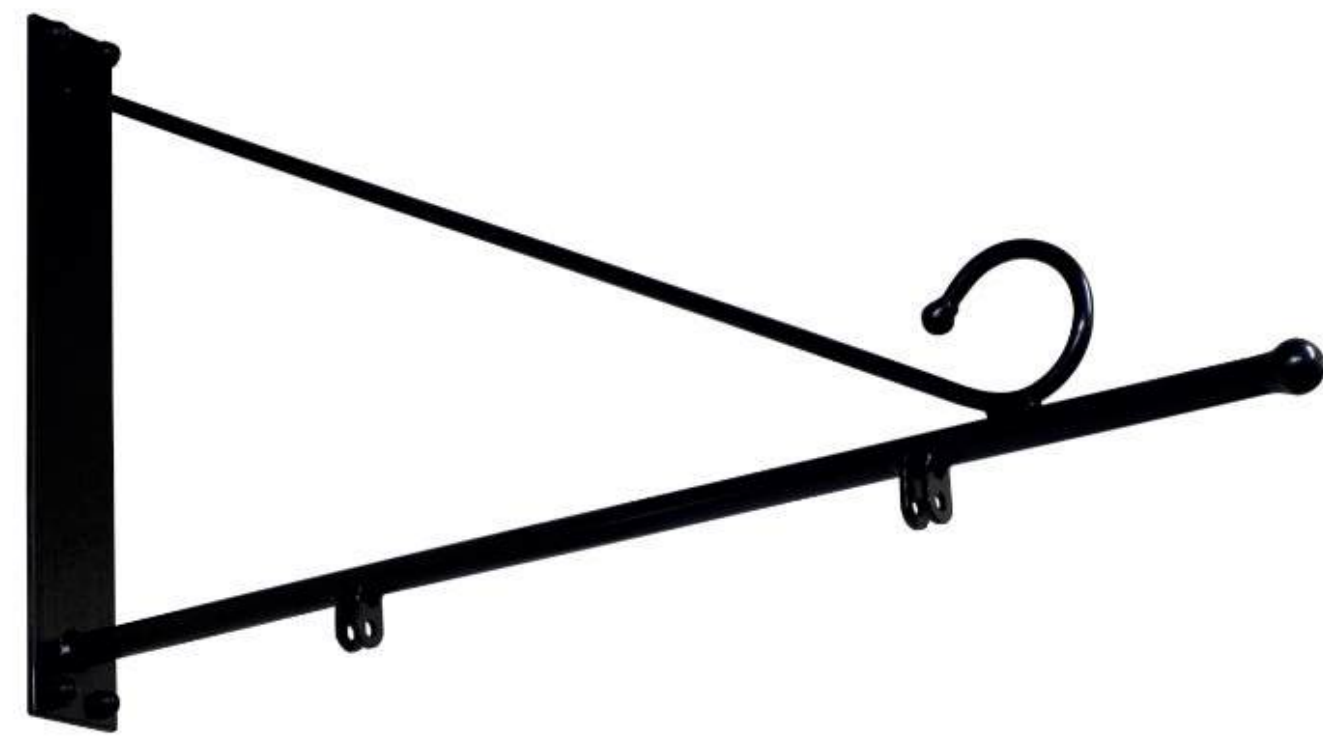

Supplied with: Ankerbolts to fix to the wall and Hanger bolts to swing the panel

Side elevation

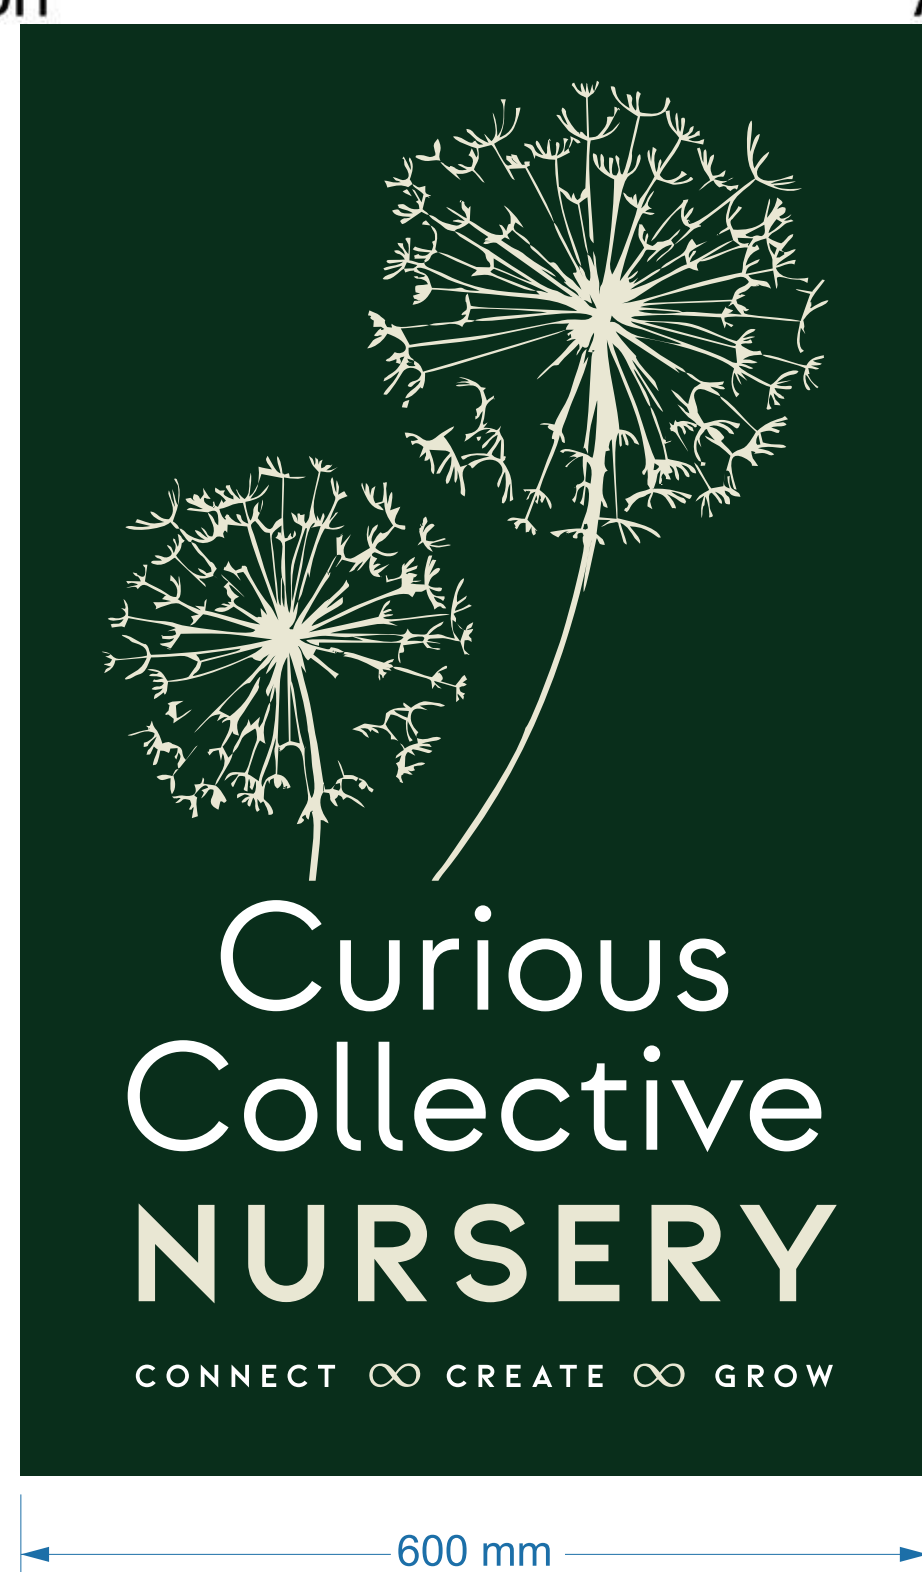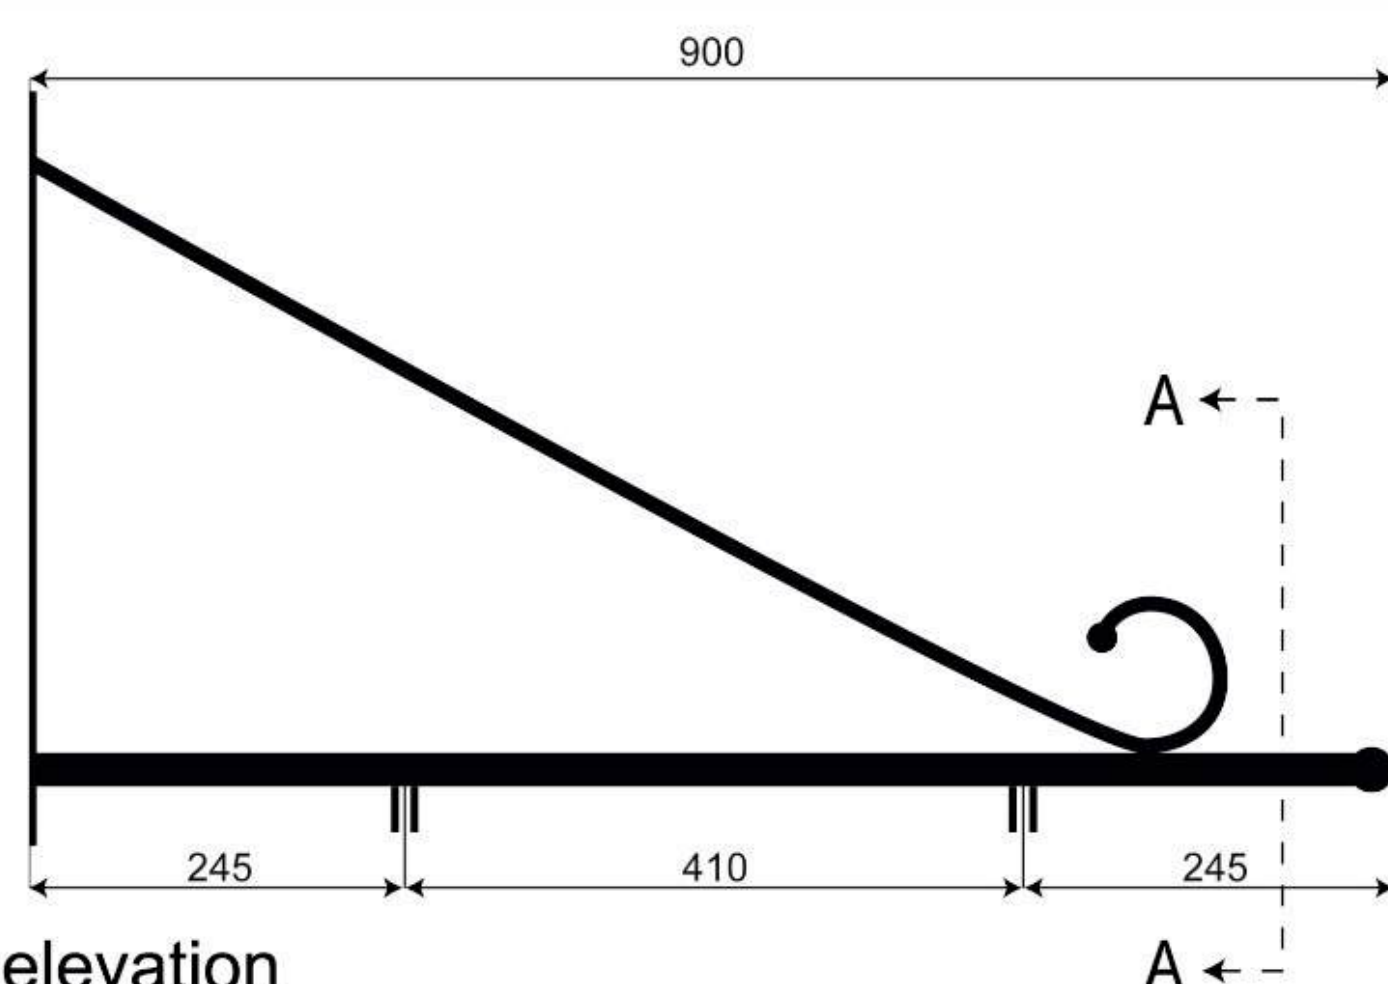

[Back](#)



Section on AA

