REF: WB/09/0973/full Items 5 & 6 In the interest of listed building

North Terrace and South Balcony


Fitted 50x6mm galvanised tubular steel handrail at 1100mm height and standards at 1500mm centres welded to and bolted through 400x200x12mm galvanised steel plates each to receive 4 nos 200xM12mm chemi-bolts at 300mm vertical centres to rear of parapet and through slated cover with lead sleeve over to receive 12.8mm clear laminated glass over parapet. (See drawing No.E11847 attached)


Galvanised steel to be finished in black powder coating

Glazed Screen – South Facing

In the interests of the integrity of the listed building the south facing doors shall be inward opening and shall be screened by a glazed panel to prevent access to balcony except for maintenance.

The fixed glazed panel will be 700mm in height fixed externally above cill using the D Shape bracket shown to prevent access to balcony except for maintenance. 300mm will be added to the width of the opening(150mm each side).

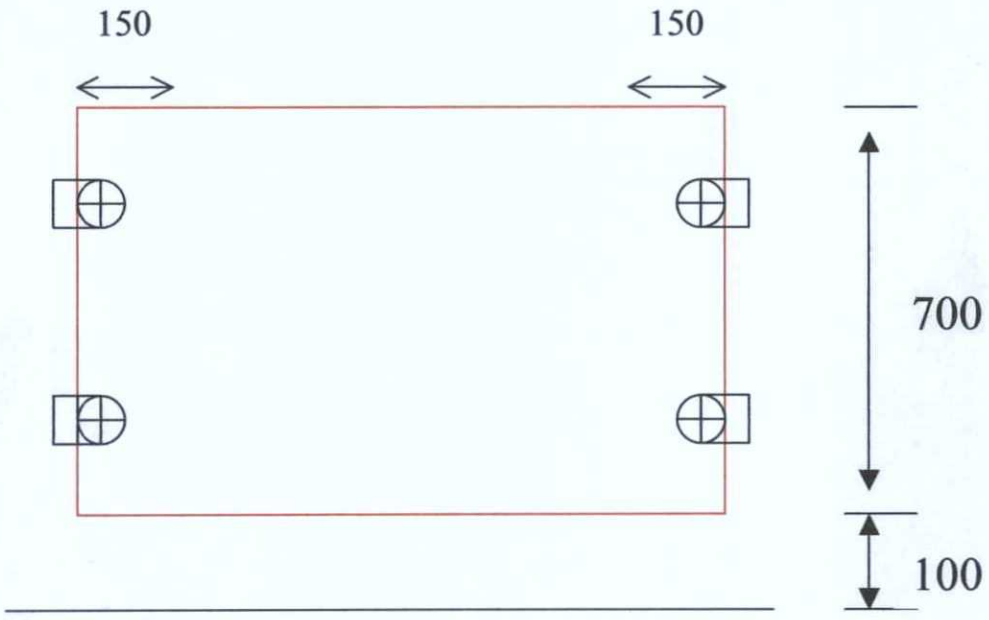

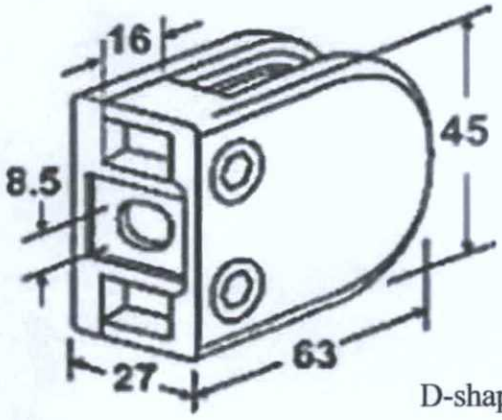

D-shape bracket