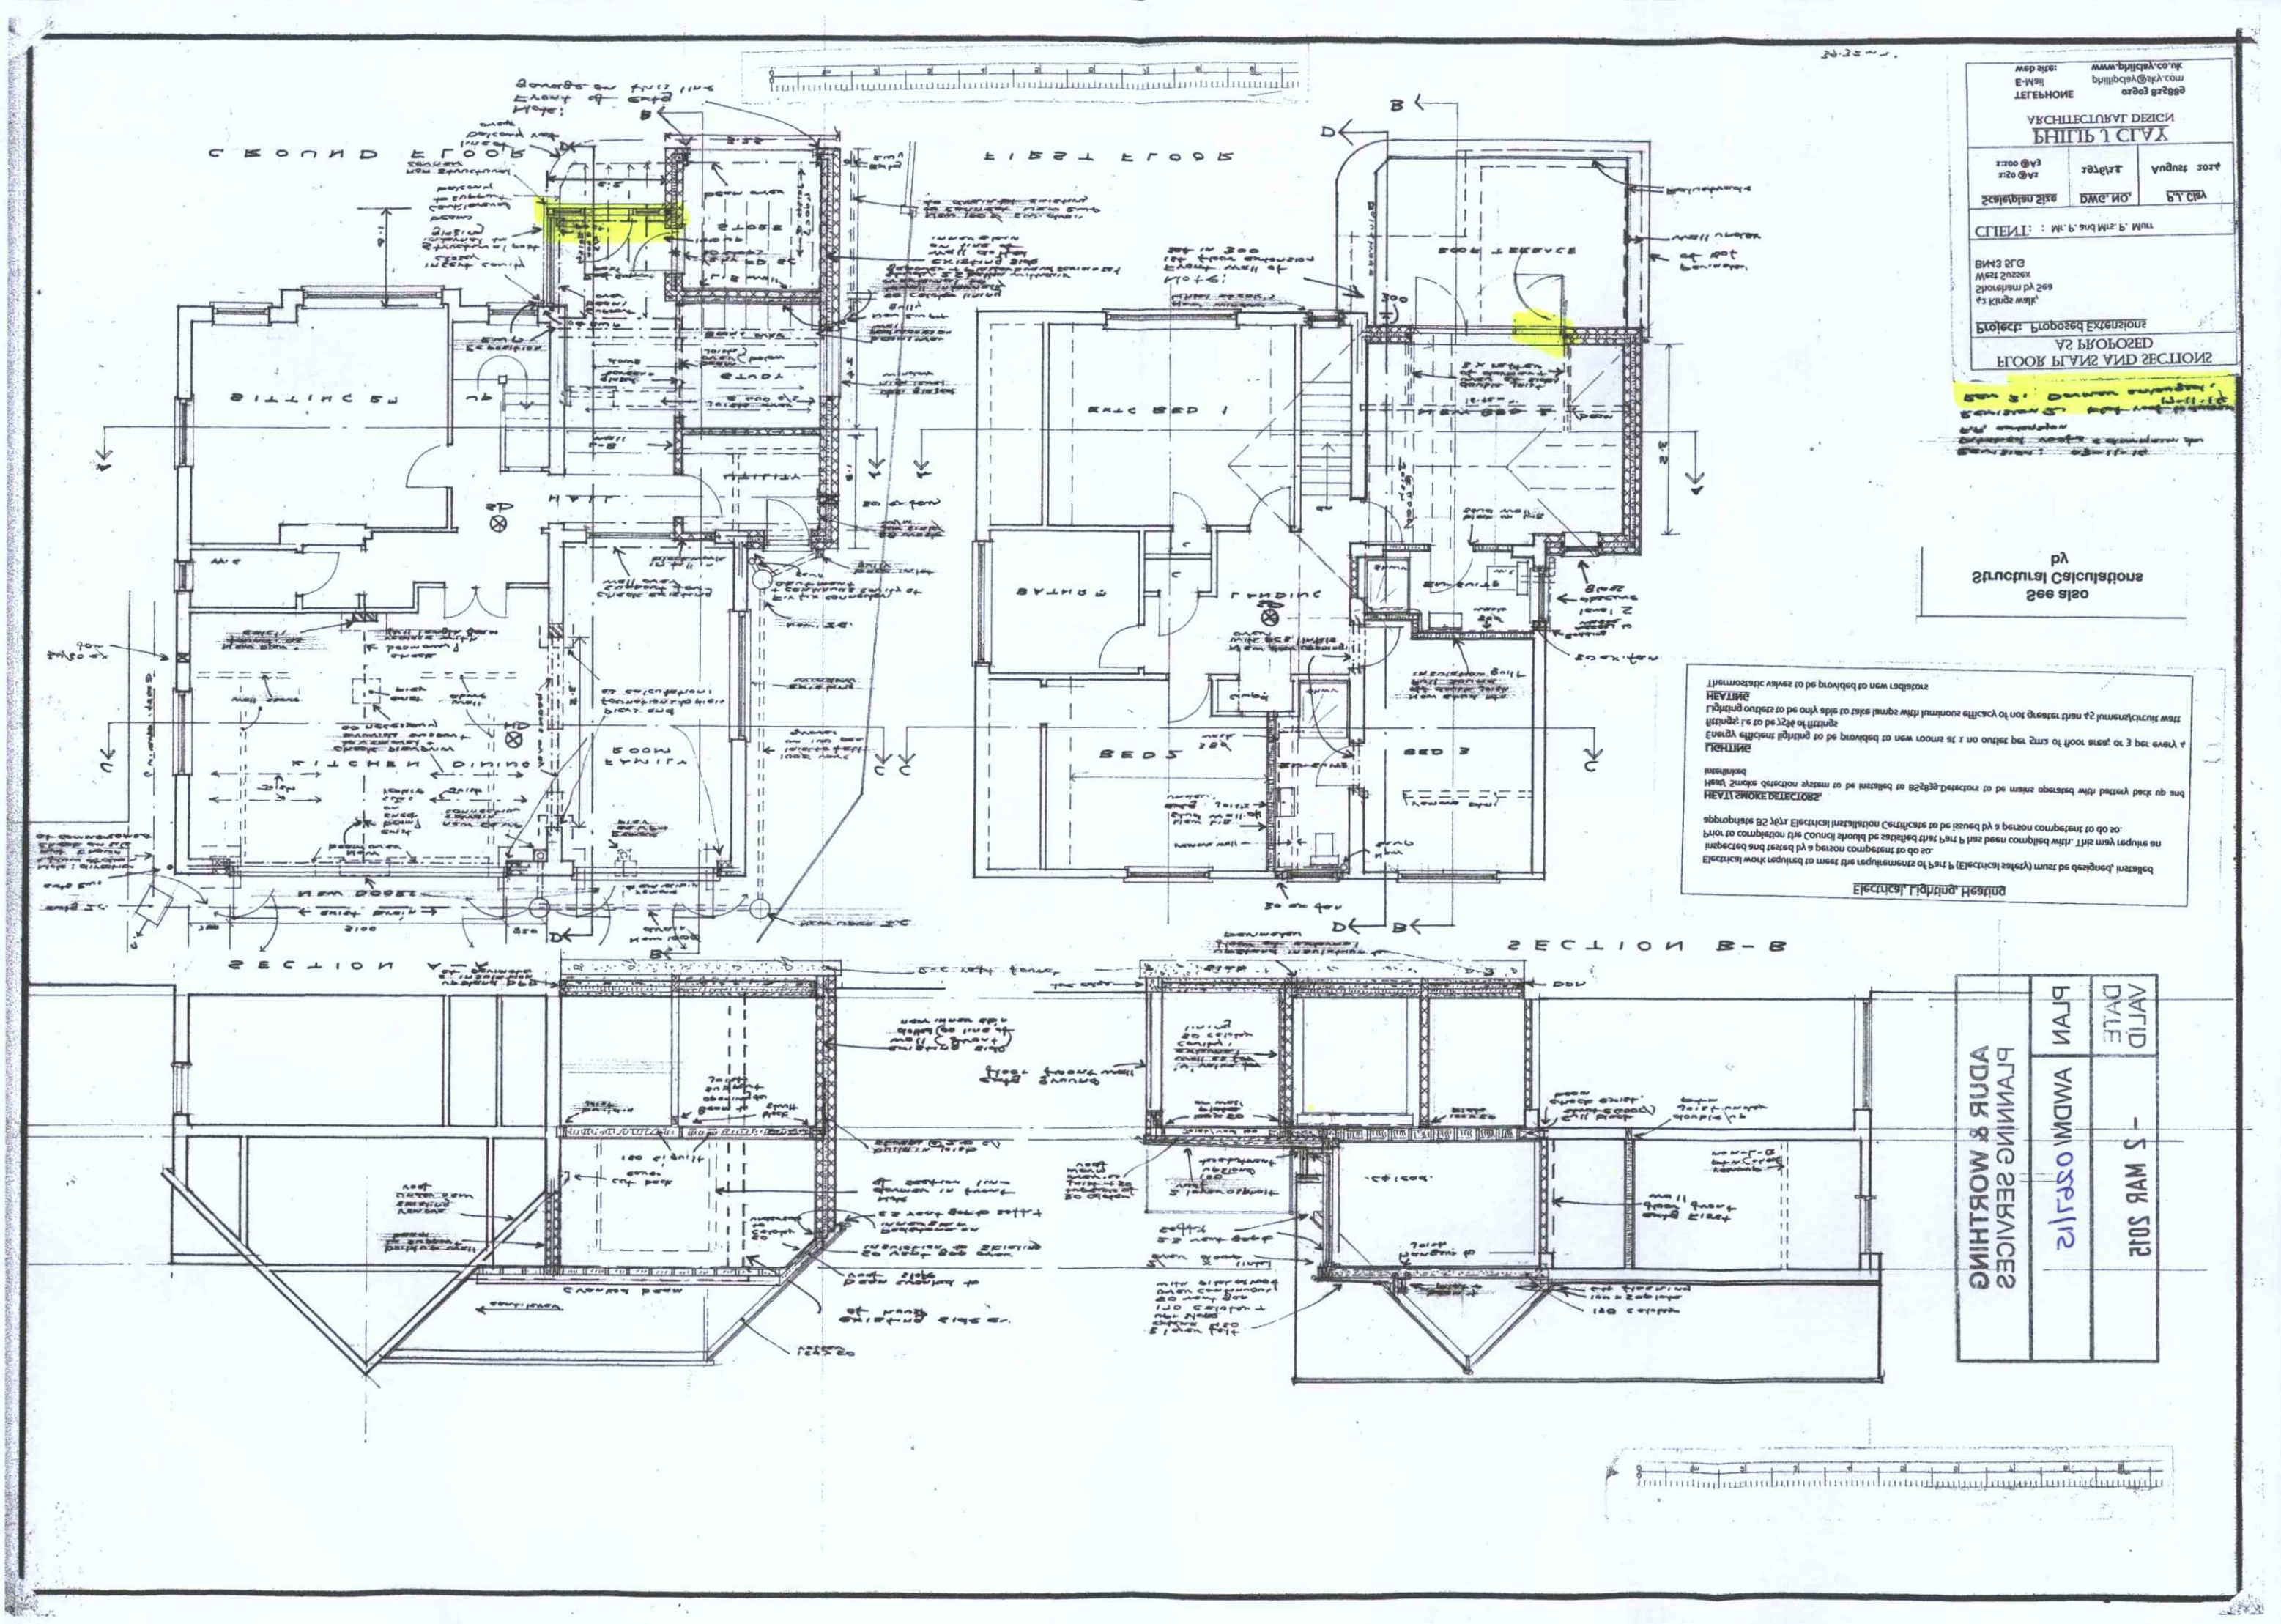

Electrical, Lighting, Heating

Electrical work required to meet the requirements of Part P (Electrical safety) must be designed, installed inspected and tested by a person competent to do so.
Prior to completion the Council should be satisfied that Part P has been complied with. This may require an appropriate BS 7671 Electrical Installation Certificate to be issued by a person competent to do so.

HEAT/SMOKE DETECTORS

Heat/Smoke detection system to be installed to BS5839. Detectors to be mains operated with battery back up and interlinked

LIGHTING

Energy efficient lighting to be provided to new rooms at 1 no outlet per 5m2 of floor area; or 3 per every 4 fittings; i.e to be 75% of fittings

Lighting outlets to be only able to take lamps with luminous efficacy of not greater than 45 lumens/circuit watt

HEATING

Thermostatic valves to be provided to new radiators

See also
Structural Calculations
by

FLOOR PLANS AND SECTIONS
AS PROPOSED

Project: Proposed Extensions
42 Kings walk,
Shoreham by Sea
West Sussex
BN43 5FG

CLIENT: Mr. P. and Mrs. P. Mutt

Scale/plan size	DWG. NO.	Ref.
1:50 @ A1	1:75 @ A2	August 2014

PHILIP L CLAY
ARCHITECTURAL DESIGN
TELEPHONE 0203 8288
E-Mail: philipclay@sky.com
web site: www.philclay.co.uk

ADUR & WORTHING
PLANNING SERVICES

PLAN
AWDM/0271/15
DATE
VALID
- 2 MAR 2015