

Sectional Garage Doors

NEW: LPU 67 Thermo – The energy-saving door

HÖRMANN

LPU 67 Thermo

NEW

The energy-saving door impresses thanks to 67-mm-thick sections with thermal break achieving excellent thermal insulation.

LPU 42

The double-skinned LPU 42 door offers very good insulation with its 42-mm-thick sections.

LTE 42

The single-skinned LTE 42 door is the inexpensive solution for detached garages that do not require additional thermal insulation.

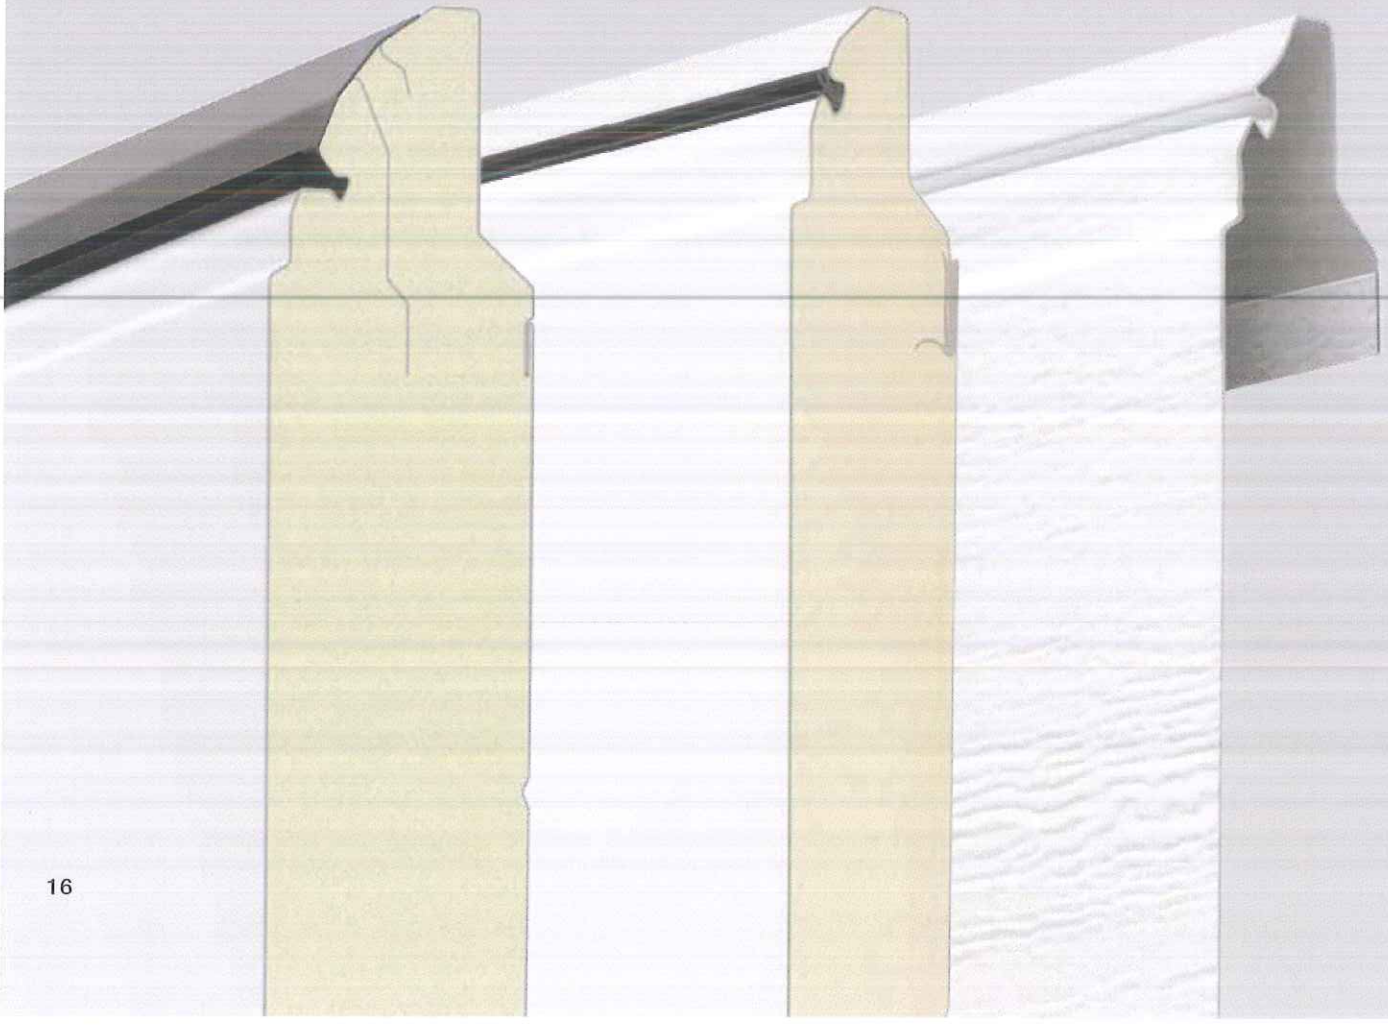



S-ribbed (LPU 42, LTE 42), Traffic white RAL 9016

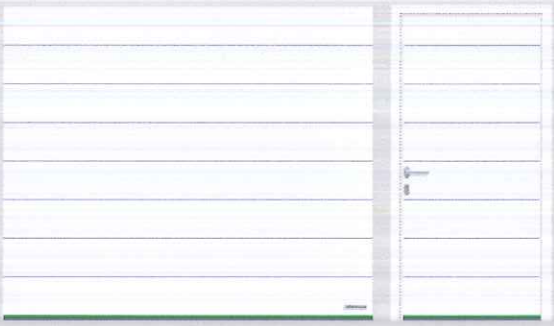

M-ribbed (LPU 67 Thermo, LPU 42, LTE 42), Traffic white RAL 9016



D-ribbed (LPU 42), Traffic white RAL 9016

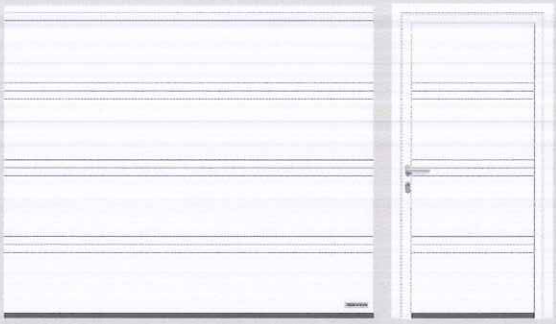

T-ribbed (LPU 42), Traffic white RAL 9016



L-ribbed (LPU 67 Thermo, LPU 42), Traffic white RAL 9016



Panelled (LPU 42, LTE 42), Traffic white RAL 9016



▲ S-ribbed in Woodgrain Anthracite grey RAL 7016;
Hörmann aluminium entrance door ThermoSafe, style 650 Anthracite grey RAL 7016

Operating comfort with the highest security

Safety while operating the garage door is top priority for Hörmann. And Hörmann sets the standards for this with its innovative solutions. This has been proven time and time again through numerous Hörmann patents. Hörmann sectional doors are tested and certified in accordance with the high safety requirements of European standard 13241-1, not only on their own but also in combination with operators. It would be hard to find a safer sectional door.
And this provides you and your family with safety during daily use.

It pays to compare!

