ADUR & WORTHING PLANNING SERVICES	
PLAN	AWDM/ 0455/15
DATE VALID	17 APR 2015

Top hung 'Velux' rooflight with min size in the open position 750x450mm with cill between 800–1100mm above floor level for escape purposes.

Provide access doors to roof spaces to clients spec. Doors insulated with 90mm 'celotex'

Stud adjacent to party wall to be infilled with 90mm 'Celotex'. Party wall to have sand/cement render.

East dormer cheek to have 9mm 'Supalux' externally (between ply & 'Tyvek') & 2No layers 12.5mm plasterboard internally.

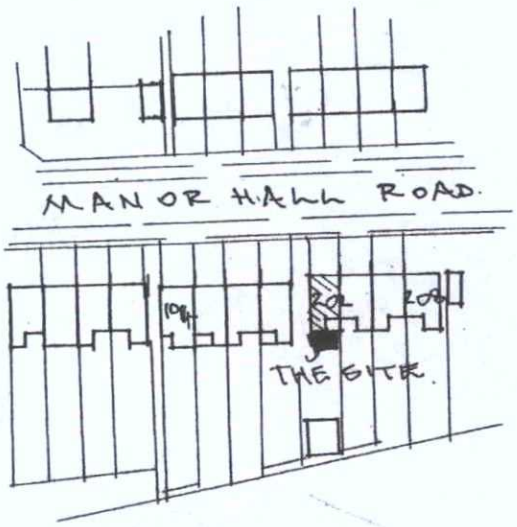

Site Plan 1:1250



Dormer window to have casement with min unobstructed size in the open position 750x450mm with cill between 800–1100mm above floor level for escape purposes.

Remove hip

