'Over 40 years experience providing an excellent landscape service in the South East'

James Lawlor

Landscape Contractor

Bridgetown, Co Wexford
087 2660947

www.lawlorlandscapes.com

alci MEMBER
Association of Landscape Contractors of Ireland

Project: **Mariner Point, Shoreham by Sea**

Client: WN Developments

Date: 20th April 2021

Trees at Mariner Point, Brighton Rd, Shoreham

Tree supplied for the project at the above location were *Sorbus aria* & *Quercus ilex*. These species were chosen due to the proximity to the sea and to tolerate exposure to salt air.

My understanding is that planters were used as the concrete slab beneath the trees is a flood defence barrier and cannot be broken to facilitate tree planting. I recommend that the 3 no. trees in wooden planters are transplanted from these containers into purpose made metal planters that will provide an adequate volume growing media for the trees to develop more naturally and will be capable of withstanding pressure from the roots over time. This would best be done in winter 2021 (November / December)

I would recommend a **Hartecast HC204** planter with suitable dimensions to give a minimum of 1 cubic meter of soil. This is available from Hartecast Street Furniture.

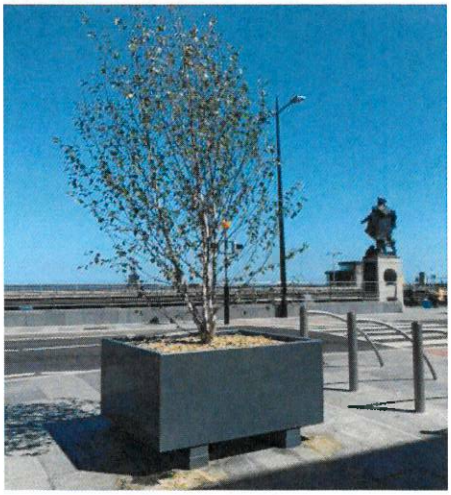

1200m x 1200mm x 800mm recommended dimensions.

Similar equivalent product could also be used

Regards,

Kevin Lawlor
Arborist
+353 87 1354130
lawlorlandscapes@gmail.com