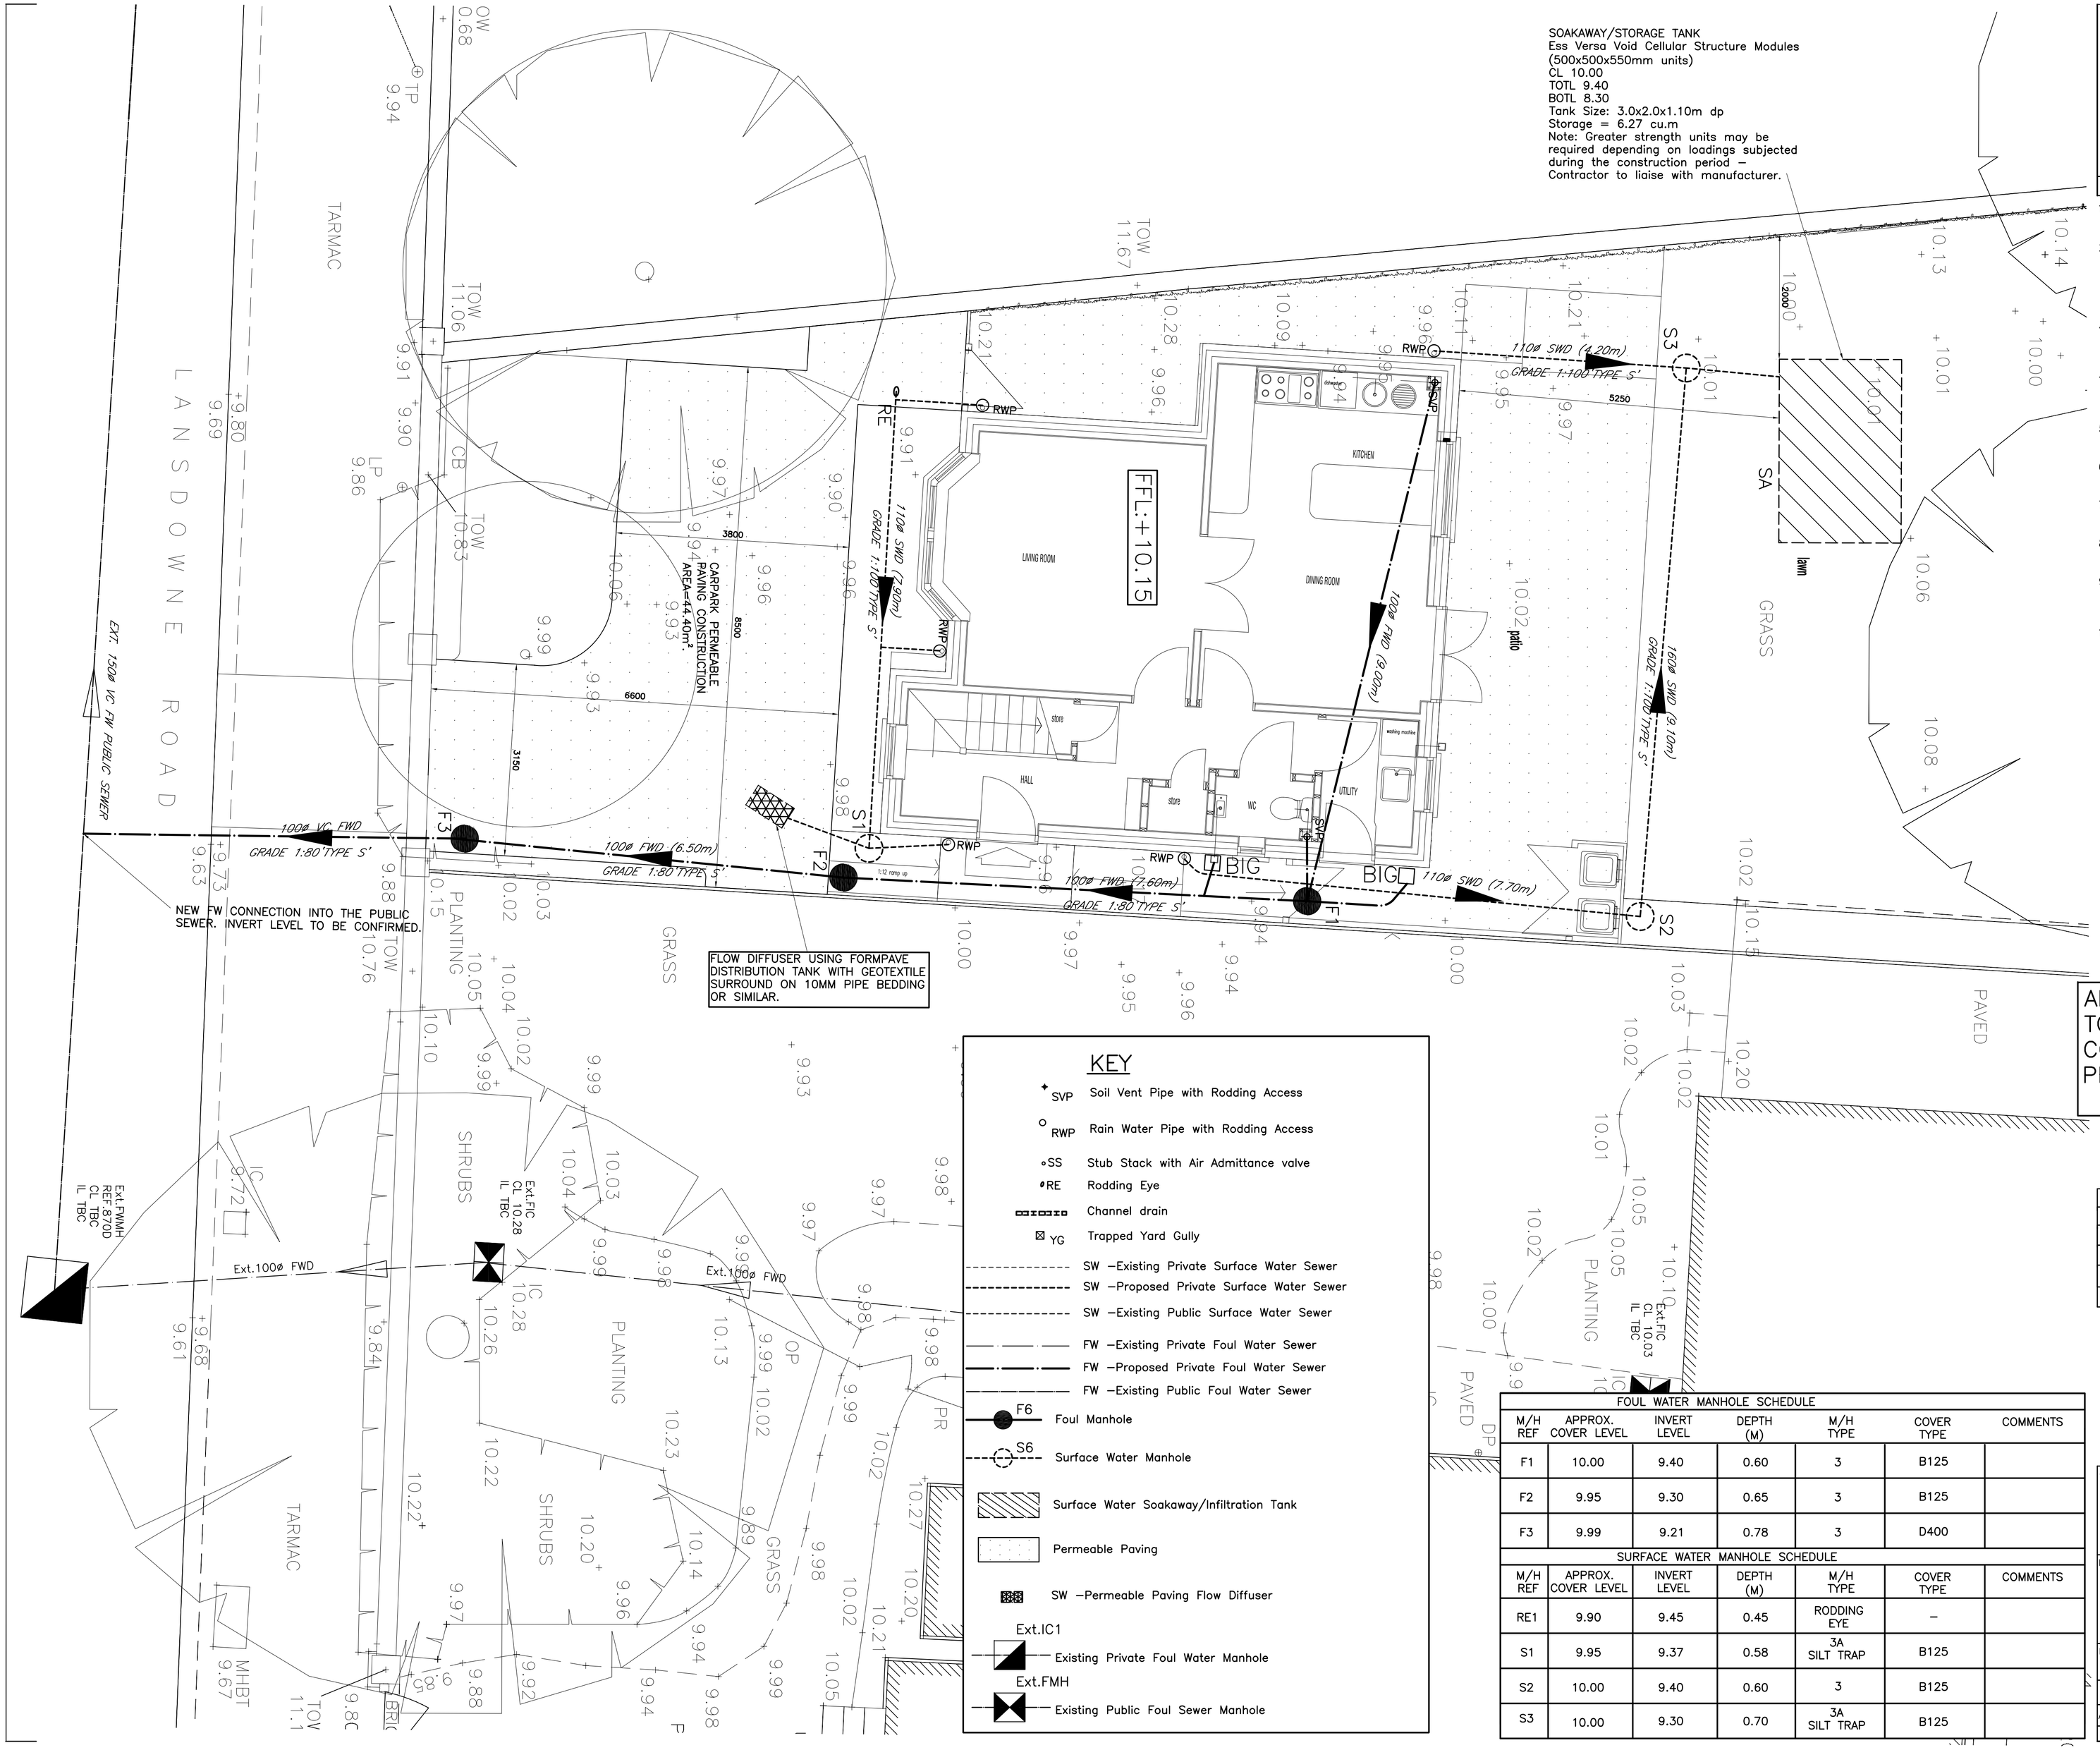


KEY

- SVP — Soil Vent Pipe with Rodding Access
- RWP — Rain Water Pipe with Rodding Access
- SS — Stub Stack with Air Admittance valve
- RE — Rodding Eye
- Channel drain
- YG — Trapped Yard Gully
- SW –Existing Private Surface Water Sewer
- SW –Proposed Private Surface Water Sewer
- SW –Existing Public Surface Water Sewer
- FW –Existing Private Foul Water Sewer
- FW –Proposed Private Foul Water Sewer
- FW –Existing Public Foul Water Sewer
- F6 — Foul Manhole
- S6 — Surface Water Manhole
- Surface Water Soakaway/Infiltration Tank
- Permeable Paving
- SW –Permeable Paving Flow Diffuser
- Ext.IC1 — Existing Private Foul Water Manhole
- Ext.FMH — Existing Public Foul Sewer Manhole

In addition to these notes, reference shall be made to the specification of works and the relevant Architect's and Specialist's drawings and specifications.

The Contractor is responsible for verifying all site dimensions before commencing work.

All dimensions are in millimetres unless noted otherwise.

This drawing has been produced electronically and may have been photo reduced or enlarged when printed or copied. Dimensions on this drawing shall not be scaled. Work only to figured dimensions. Any dimensional discrepancies errors or omissions are to be reported to the engineer immediately.

Levels are in metres unless noted otherwise to Ordnance Survey datum.

The Contractor is responsible for the stability of the building whilst the works are in progress.

NOTES

1. THIS DRAWING IS BASED ON DRAWING NOS. 1272/03 BY HUTCHINSON DESIGN ASSOCIATES.
2. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH THE FOLLOWING DRAWING:

   62610/11 DRAINAGE DETAILS
3. CONTRACTOR IS TO TAKE NECESSARY PRECAUTIONS TO ENSURE THAT TRENCHES ARE KEPT CLEAR OF GROUND WATER DURING CONSTRUCTION.
4. ALL DRAINAGE WORKS TO BE CARRIED OUT IN ACCORDANCE WITH "SEWERS FOR ADOPTION" 7TH EDITION.
5. ALL ADOPTED PIPEWORK TO BE 100ø VITRIFIED CLAY UNLESS NOTED OTHERWISE.
6. ALL PIPEWORK THROUGH WALLS TO BE IN ACCORDANCE WITH THE BUILDING REGULATIONS.
7. ALL PIPEWORK UNDER ROADS WITH LESS THAN 900MM COVER TO HAVE 150MM CONCRETE SURROUND.
8. MINIMUM GRADIENT TO DRAINS TO BE 1:80 FOR 110ø OR 110ø FW AND 1:100 FOR 110ø SW.
9. POSITIONS OF MANHOLES SHOWN ON THIS DRAWING ARE INDICATIVE ONLY. ACTUAL LOCATIONS TO BE FINALIZED ON SITE.
10. PROVIDE CONCRETE LINTELS OVER OPENINGS WHERE PIPES PASS THROUGH WALLS. ALLOW FOR 150MM CLEARANCE ALL ROUND PIPE.

ALL DIMENSIONS AND LEVELS TO BE CHECKED AND CONFIRMED BY THE ARCHITECT PRIOR TO CONSTRUCTION.

REV	DESCRIPTION	DATE	BY
D	FEH SOAKAWAY/PERMEABLE PAVING	29/06/24	JS
C	FEH SOAKAWAY DESIGN	16/05/24	JS
B	AMENDED NOTES	28/02/24	JS
A	AMENDED DRAINAGE	26/02/24	JS
0	ORIGINAL ISSUE	09/02/24	JS

FOUL WATER MANHOLE SCHEDULE

M/H REF	APPROX. COVER LEVEL	INVERT LEVEL	DEPTH (M)	M/H TYPE	COVER TYPE	COMMENTS
F1	10.00	9.40	0.60	3	B125	
F2	9.95	9.30	0.65	3	B125	
F3	9.99	9.21	0.78	3	D400	

SURFACE WATER MANHOLE SCHEDULE

M/H REF	APPROX. COVER LEVEL	INVERT LEVEL	DEPTH (M)	M/H TYPE	COVER TYPE	COMMENTS
RE1	9.90	9.45	0.45	RODDING EYE	–	
S1	9.95	9.37	0.58	3A SILT TRAP	B125	
S2	10.00	9.40	0.60	3	B125	
S3	10.00	9.30	0.70	3A SILT TRAP	B125	

DIXON HURST
CONSULTING CIVIL & STRUCTURAL ENGINEERS
HEVERSHAM HOUSE, 18–22 BOUNDARY ROAD, HOVE, BN3 4EF
T: (01273) 421444 F: (01273) 420008 E: hove@dhk.co.uk
www.dhk.co.uk
Registered in England No. 3438720 – Registered Office 4 Frederick Terrace, Brighton BN1 1AX.

CONTRACT

LAND NEXT TO 2 LANSDOWNE ROAD WORTHING, WEST SUSSEX

DRAWING

DRAINAGE LAYOUT

DRAWING No.	REV	CHECKED
62610 / 10	D	
SCALE 1:50 @ A1	DATE FEB 24	DRAWN JS
AutoCAD Ref: 62610–10		APPROVED

This drawing is produced using Autocad: Only written dimensions are to be respected