



HEALTH & SAFETY:

ALL WORKS TO BE CARRIED OUT BY A CONTRACTOR COMPETENT TO UNDERTAKE THE CONSTRUCTION OF WORKS AS INDICATED ON THIS DRAWING. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH THE JOB SPECIFIC RISK ASSESSMENT. THE HAZARDS NOTED ARE IN ADDITION TO THE NORMAL HAZARDS AND RISKS FACED BY A COMPETENT CONTRACTOR WHEN DEALING WITH THE TYPE OF WORKS DETAILED ON THIS DRAWING.



7.5t Panel Van
Overall Length 7.210m
Overall Width 2.192m
Overall Body Height 2.544m
Min Body Ground Clearance 0.316m
Track Width 1.865m
Lock to Lock Time 4.00s
Kerb to Kerb Turning Radius 7.400m

— Wheel Outline
— Body Outline

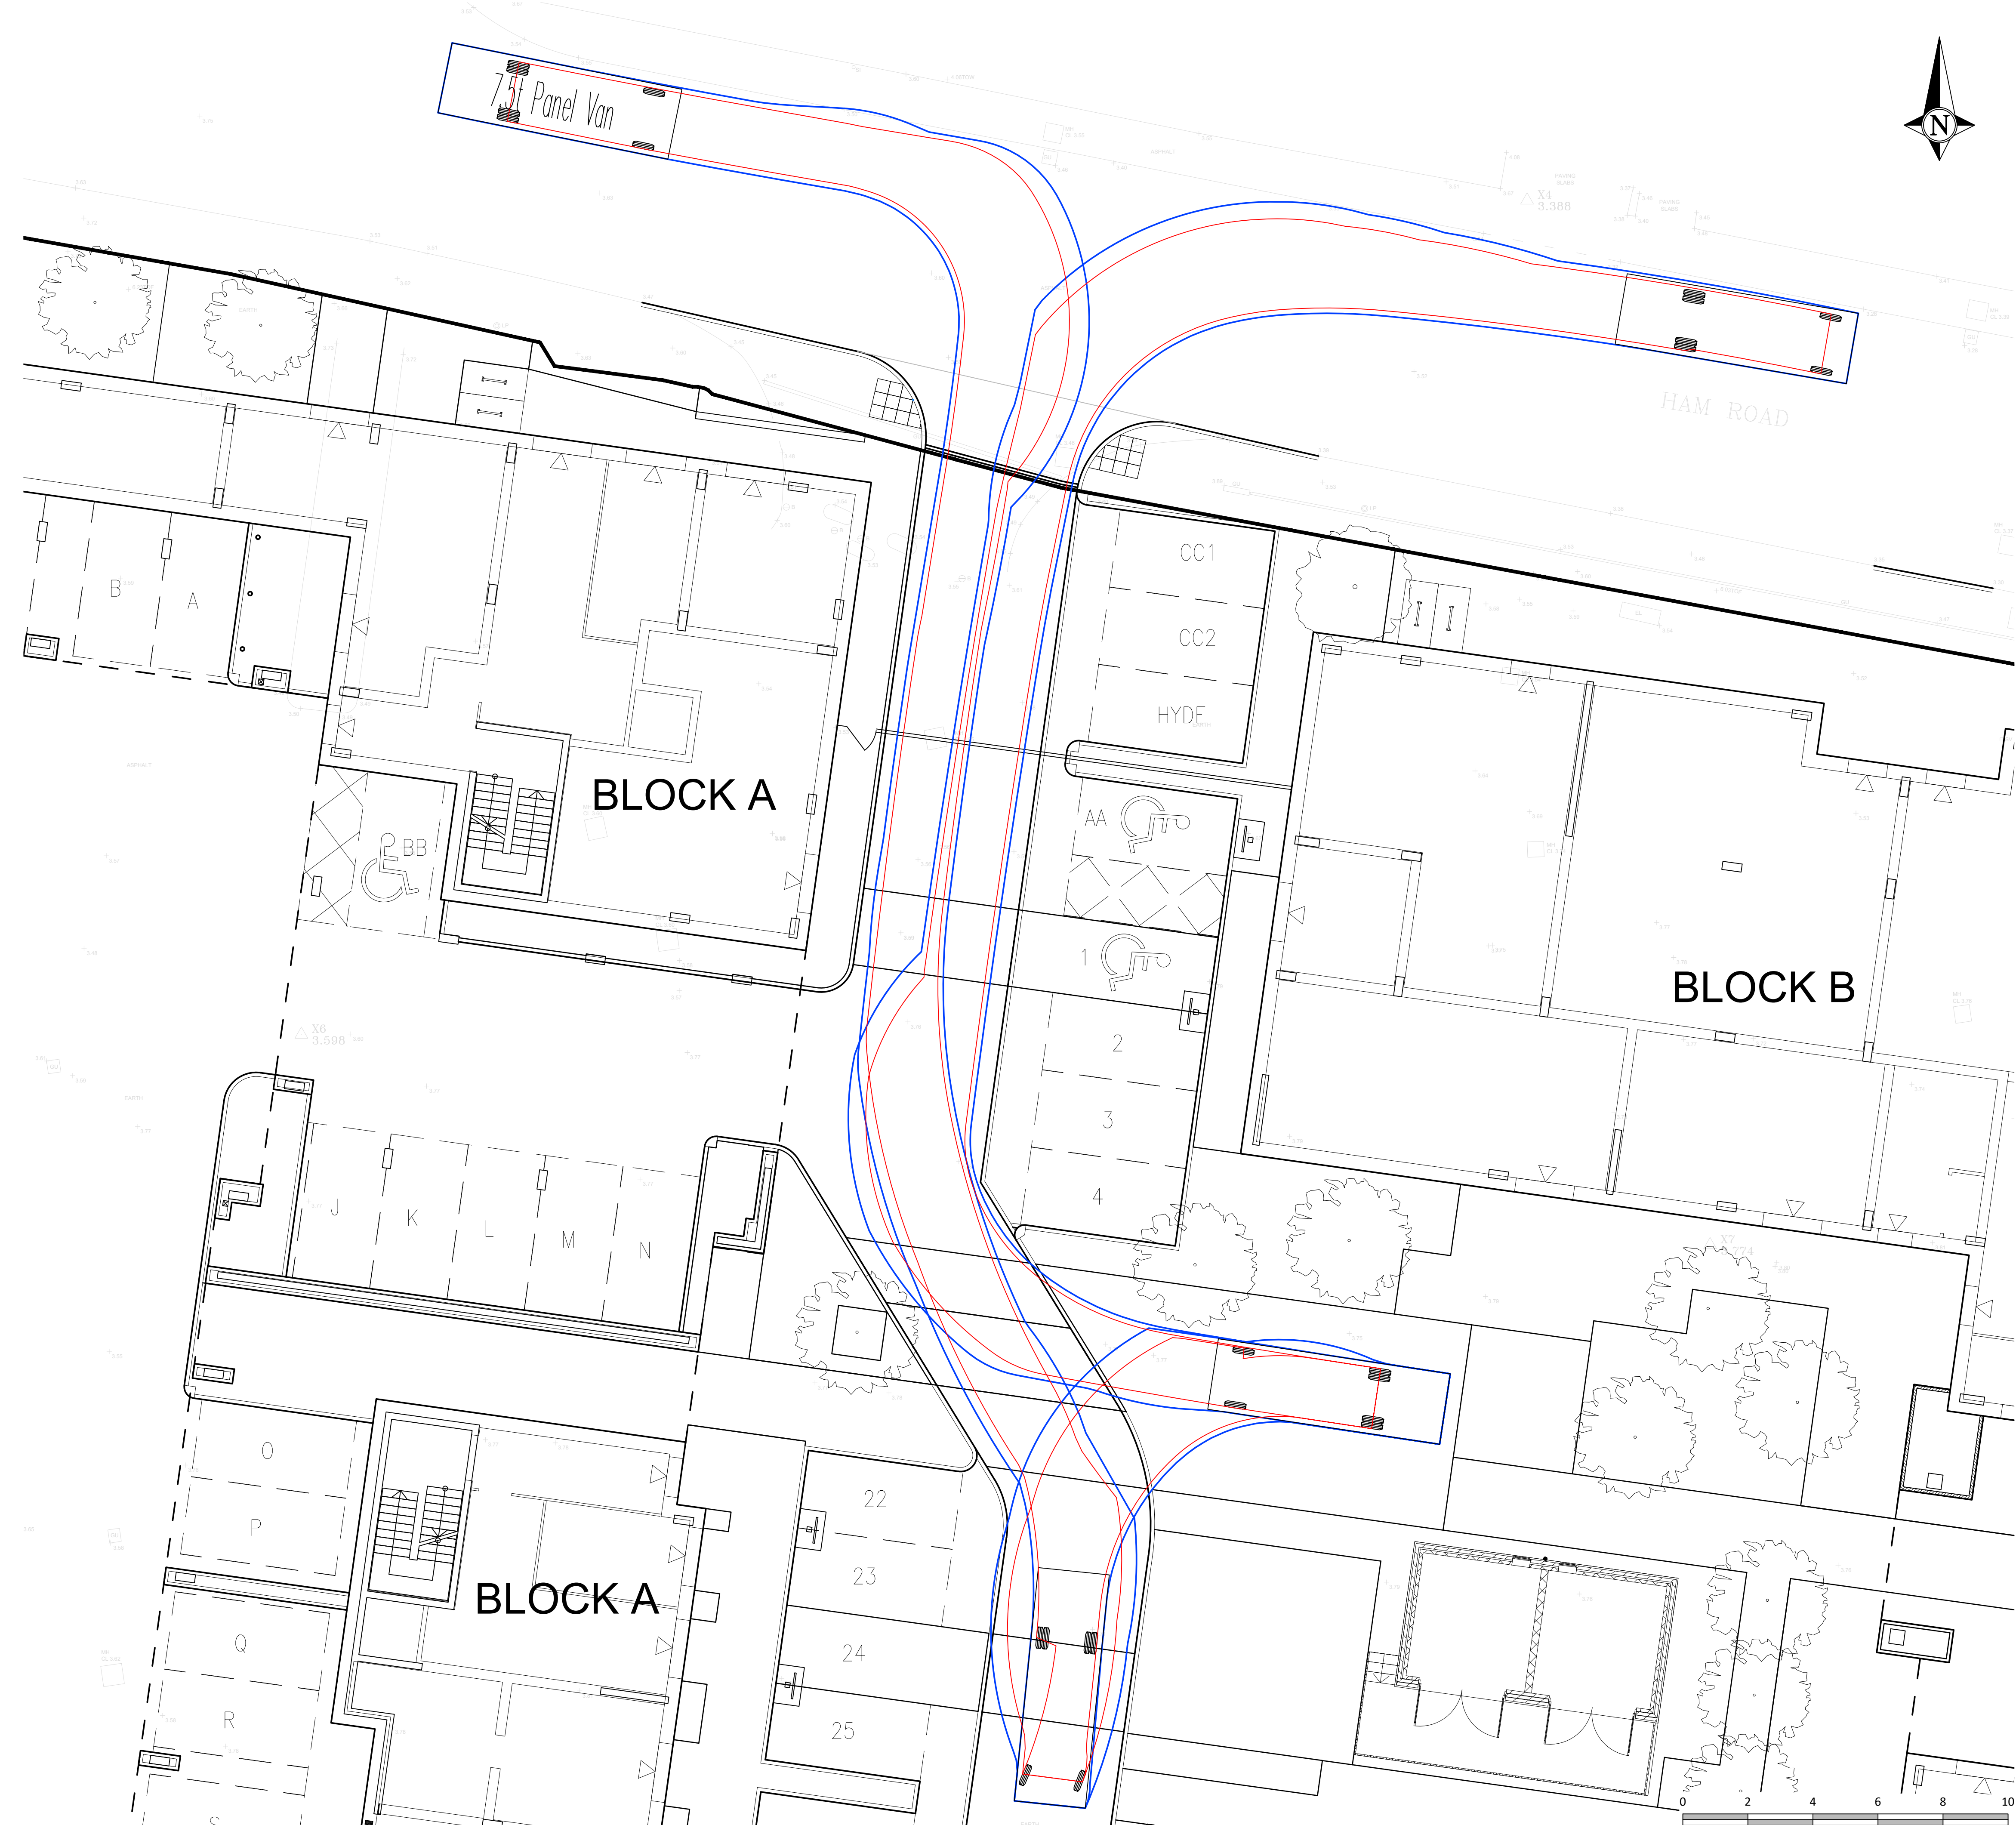

P1 rev	25/06/26 date	PRELIMINARY ISSUE description	AJV initials
Project ADUR CIVIC CENTRE, SHOREHAM			
Client / Architect PMC HGP		Title DELIVERY VAN SWEPT PATH ANALYSIS	
 CONSULTING		<u>Hampshire Office:</u> Dewey House, 55 High Street, Ringwood, Hampshire BH24 1AE Telephone: 01425 484400 Facsimile: 01425 484409 Email: admin@reuby-stagg.co.uk	
CIVIL & STRUCTURAL ENGINEERS			
date	JUN 26	scale 1:100	size A1
drawn	BH	project no.	10721
checked	AJV	drawing no.	221
		revision	P1