



Type FA1 Farm access track construction

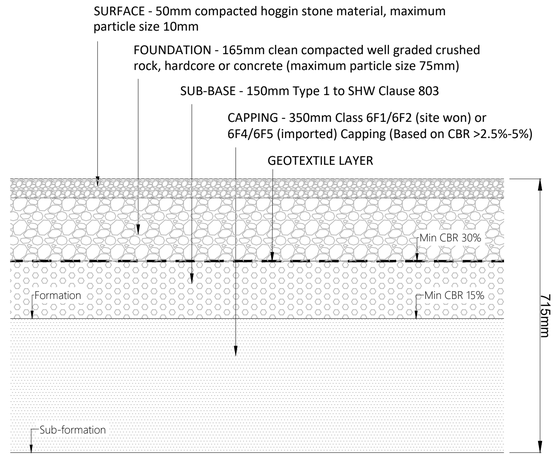


Carriageway Type FA2 Temporary access track construction

Note: The formation and sub-formation levels will form part of the future adoptable Section 38 road for Phase 1 and shall therefore be constructed to WSCC standards. The contractor shall carry out CBR tests to confirm the sub-formation CBR is 2.5% or greater. If the CBR is less than 2.5% the contractor shall report it to the Project Manager and a suitable ground improvement layer will be agreed prior to placing capping layer.

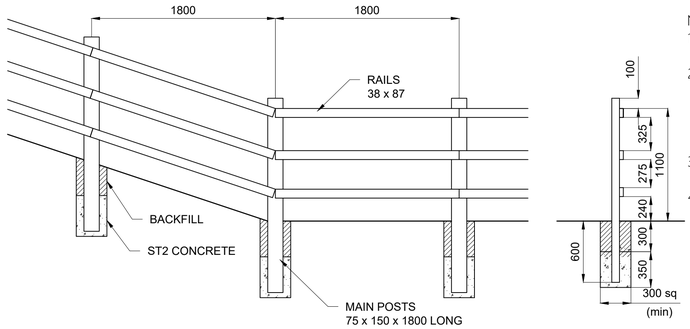


Notes:
1. B.S.1722 Part 7 applies unless otherwise stated.
2. Where the fence forms a boundary between the highway and private property, the rails shall be fixed to the private property side.
3. Posts supported by ST2 concrete.
4. All dimensions are in Millimetres

TIMBER POST AND 3 RAIL FENCE DETAIL

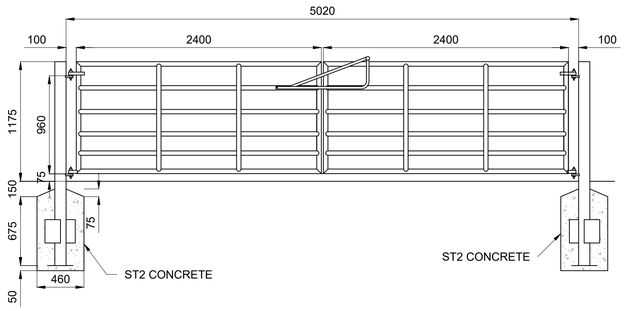

Notes:
1. All dimensions are in Millimetres.
2. Gates shall comply with the appropriate clauses in BS 3470.
3. Gate stops to be provided.
4. The gate shall open away from the road into the owner's property.
5. The corners of the main frame may be rounded, rounded and mitred, mitred (as drawn), saddled or crimped.
6. Protective treatment to be hot dip galvanizing.
7. The Contractor shall provide a key operated padlock with a chain to lock the gates and shall issue a set of three keys to each of the Client and Oxfordshire CC.

STEEL DOUBLE FIELD GATE DETAIL

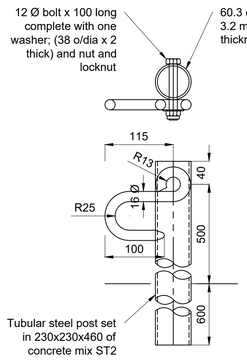

Notes:
1. All dimensions are in Millimetres unless otherwise stated.
2. Gate fittings shall comply with BS 3470 or BS 5709 as appropriate.
3. All metal fittings and bolts shall be galvanized steel.

HOLDING BACK STOP GATE POST DETAIL

WEST SUSSEX COUNTY COUNCIL HIGHWAYS STANDARD DRAWINGS		
Drawing No.	Revision	Title
S278/38/01	C	Alternative Methods of Laying Kerbs
S278/38/02	B	Approved Kerb Type Selection Sheet 1
S278/38/04	B	Footway/Cycleway Type 1 & 2
S278/38/07	C	Footway Crossover Type 1 - Residential
S278/38/10	A	Preferred Arrangement of Services with Public Highway
S278/38/11	D	Drainage - Gully A Pre-cast Concrete
S278/38/12	E	Drainage - Precast Concrete Ring Soakaway
S278/38/13	E	Drainage - Type B Catchpit
S278/38/17	B	Street Furniture - Bollards
S278/38/18	A	Street Furniture - Tactile Crossings
S278/38/20	B	Carriageway - Tie-in Options
S278/38/21	F	Carriageway - Flexible Specification
S278/38/33	A	Pipe Bedding
S278/38/34	A	Cellular Storage Sht 1
S278/38/35	A	Cellular Storage Sht 2
S278/38/36	A	Pipe Junctions - Lateral Connections

Notes
1. Do not scale from this drawing. All dimensions shown are in millimetres unless noted otherwise.
2. All kerb and edging concrete races shall be shuttered front and back to minimise excessive use of concrete.

Ordnance Survey Licence number: 100057360

Drawing Revisions

Rev:	Drn:	Date:	Details:	Chk:
C1	AM	14/11/2022	Approved / For Construction	SRT
C2	AM	10/05/2023	Approved / For Construction	SRT

Client:
Persimmon Homes Thames Valley

Project
West Sompting, West Sussex

Title
West Street
Standard Details

MILESTONE TRANSPORT PLANNING
7 Ancells Court, Rye Close, Fleet, Hampshire, GU51 2UY
Tel: 01483 397888
Gateshead IBC, Mulgrave Terrace, Gateshead, NE8 1AN
Tel: 0191 338 7220
web: www.milestonetp.co.uk

Drawing Number:
601-S278-012

Scale:
As shown @ A1

Revision:
C2