

TREE WORK APPLICATION SUPPORTING REPORT

1 The Waylands, Bramble Lane, Worthing, West Sussex, BN13 3JE

Applicant / Contractor	Richard Moore Tree Surgery Ltd
Site	1 The Waylands, Bramble Lane, Worthing, BN13 3JE
Trees	T1 Robinia (front garden); T2 Beech (rear garden)
Management history	Both trees have been regularly maintained by Richard Moore Tree Surgery for approximately 12 years, on an approximately three-year pruning cycle.
Purpose	Continuation of the established cyclical management regime, returning the trees to suitable previous pruning dimensions while retaining both trees.

1. Site and tree context

The application relates to two established trees within the residential property at 1 The Waylands. T1 is a Robinia located in the front garden and T2 is a Beech located in the rear garden. Both trees have formed part of a long-term cyclical maintenance programme and have been pruned by Richard Moore Tree Surgery at approximately three-year intervals for around 12 years.

2. Proposed tree works

Ref.	Species / location	Existing dimensions	Proposed works	Result
T1	Robinia - front garden	Approx. 15 m high	Re-prune the crown to the previous established pruning points, reducing overall height by approximately 5 m. Retain a balanced crown and suitable furnishing growth.	Approx. 10 m high
T2	Beech - rear garden	Approx. 13 m high x 13 m lateral canopy spread	Reduce crown height by approximately 2 m and reduce the overall lateral canopy spread by approximately 2 m, maintaining a balanced natural crown and pruning to suitable growth points.	Approx. 11 m high x 11 m lateral spread

3. Arboricultural rationale

The proposed works are repeat management rather than tree removal or a substantial change in management. They are intended to control crown dimensions, reduce excessive extension growth and continue the established pruning cycle. The Robinia will be returned to its previous pruning points. The Beech will receive a moderate crown reduction to retain a balanced form at approximately 11 m in height and spread.

4. Workmanship and site care

All pruning will be carried out in accordance with BS 3998:2010 - Tree work. Recommendations. Cuts will be made to suitable pruning points and unnecessary removal of healthy crown material will be avoided. All green waste arising from the works will be removed and the garden left in a clean and tidy condition. Works will only commence once any required local authority consent has been obtained.


5. Tree schedule

T1 - Robinia: Front garden. Current height approximately 15 m. Re-prune to previous established pruning points, reducing the height by approximately 5 m to an overall height of approximately 10 m.

T2 - Beech: Rear garden. Current height approximately 13 m with a lateral canopy spread of approximately 13 m. Reduce height by approximately 2 m and overall lateral spread by approximately 2 m, resulting in an approximate height and lateral spread of 11 m.

SITE LOCATION PLAN

1 The Waylands, Bramble Lane, Worthing, BN13 3JE

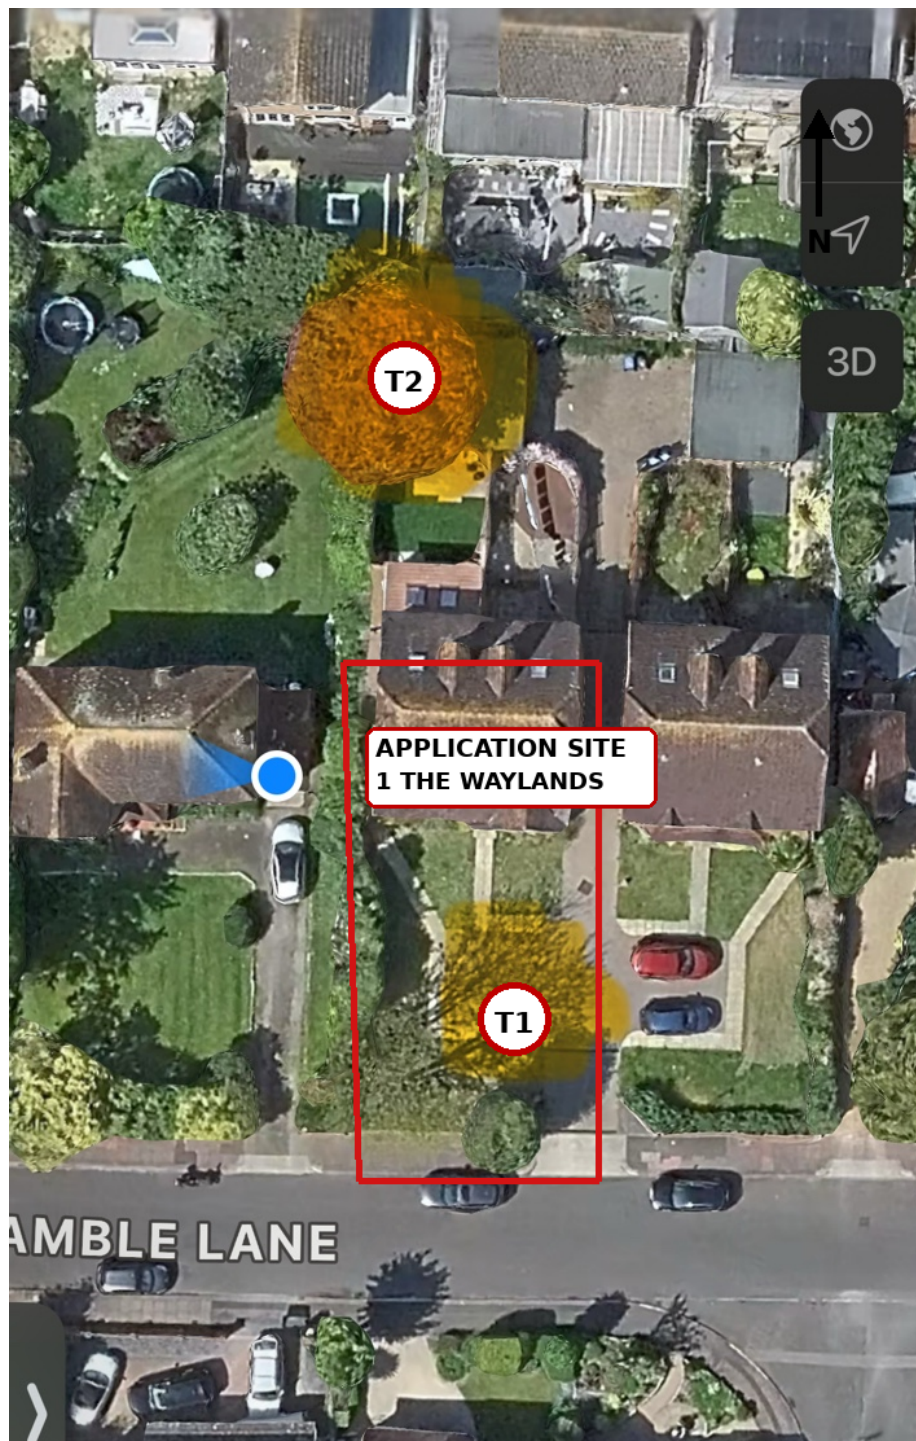

T1	Robinia - front garden
T2	Beech - rear garden
Red outline	Application property - indicative boundary

Plan based on the supplied aerial mapping image. Tree positions and the site boundary are indicative and are intended to identify the trees subject to this application; they do not define legal title boundaries.