

This drawing is copyright and may not be copied or reproduced without the written consent of Finola Brady Architectural Services.


The contractor is responsible for setting out and must check all levels and dimensions prior to work being put in hand.

Responsibility is not accepted for errors made by others in scaling from this drawing. All construction information should be taken from figured dimensions.


The designer is to be immediately notified of any suspect omissions or discrepancies.



Image of Proposed Door, Shown Unfinished

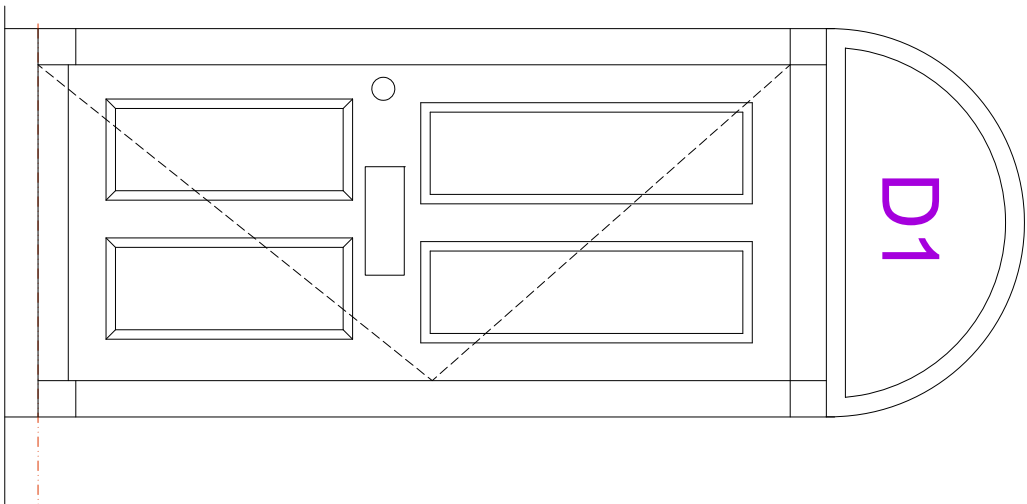


Proposed Elevation @ 1 : 20




W4

Proposed Elevation @ 1 : 20




W11

Proposed
Elevation @ 1 : 20




W4

Proposed Plan Section @ 1 : 20



W11

Proposed Plan Section @ 1 : 20

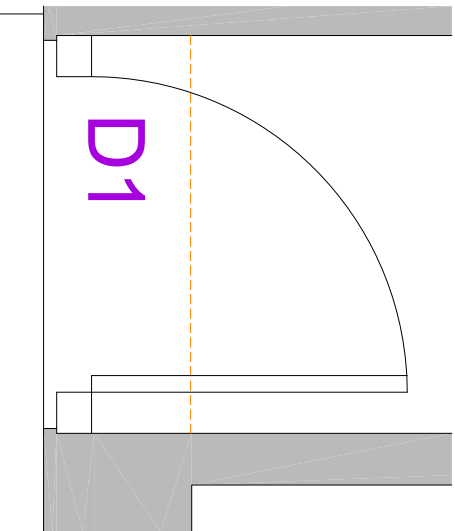

D1

Proposed Plan Section @ 1 : 20

Indicates demolished construction



Indicates new walls



Drawing to be read in conjunction with photographic window and door schedule

Door D1 to be replaced. New door to be 44mm-thick solid hardwood, traditional stile and rail construction, with 4" (102mm) heavy duty ball bearing hinges. See image adjacent. New door to have painted finish.

Windows W4 (3no.) and W11 to be replaced. Refer to drawing FB26-0207 DT01.

All other windows and doors to be retained. Paintwork to be stripped and timber sanded back to create a key. Rotten areas to be carefully cut out and new softwood replacement "patches" to be fitted to match existing, or holes to be filled with flexible filler to allow for expansion and contraction. Woodwork to be finished with 1no. coat of primer, 1no. coat of white undercoat, 2no. coats of white gloss.