



1. 30mm surface course Close graded Bitumen Macadam (10mm nominal size)
2. 50mm binder course DBM Aggregate size 20mm
3. 70mm Road Base Macadam to Clause 903 Aggregate size 28mm
4. 150mm Sub-Base D.O.T. Type 1 material to Clause 803
5. 350mm thick capping layer - Crushed concrete to Clause 802 (Based on 3% CBR) to be checked on site by Contractor.

WIDENED ACCESS ROAD MAKE-UP







DOUBLE KERB DETAIL




KERB DETAIL



Retaining Wall
1 Brick



Retaining Wall
1½ Bricks

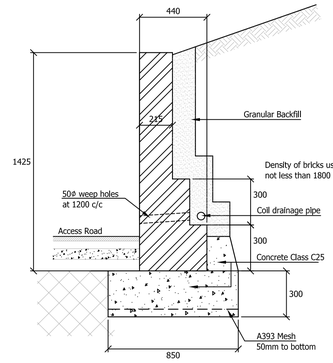

Retaining Wall
2 Bricks

GENERAL NOTES

1. The location, size, depth and identification of existing services that may be shown or referred to on this drawing have been assessed from non intrusive observations , record drawings or the like. The contractor shall safely carry out intrusive investigations, trial holes or soundings prior to commencing work to satisfy himself that it is safe to proceed and that the assessments are accurate. any discrepancies shall be notified to gta prior to works commencing.

2. Tender or billing drawings shall not be used for construction or the ordering of materials.

3. Do not scale. All dimensions and levels to be site confirmed.

4. This drawing shall be read in conjunction with all relevant architects, consultants drawings and specifications, together with H&S plan requirements

5. Copyright : This drawing must not be copied, amended nor reproduced without the prior written agreement of gta.

6. All drawings specifications and recommendations made by gta are subject to Local Authority and other relevant Statutory Authorities approval. Any works or services made abortive due to the client proceeding prior to these approvals is considered wholly at the Clients risk. gta hold no responsibility for resulting abortive works or costs.

Brighton Road
ELEVATION A
Tie into existing Road construction
1: 16.6
4.1m
2.565 +
2.640
2.970 +
3.230
3.465
3.680
3.840
3.910
4.140
4.200
4.500
+ 3.200
+ 3.390
+ 4.650
1 Brick
½ Brick
2 Bricks
Kerb
Wall
New Brickwork wall as detail above
2.300
2.335+
2.380
2.460
2.470
2.720
2.800
3.300
3.800
3.850
3.690
3.930
4.000
4.050
4.100
4.250
4.600
4.750
1:2.5
1:3
1:20
ELEVATION B
10m
4.4m
4.7m
5m
3.100
3.180
3.210
3.150
3.190
3.235
3.325
3.665
3.750
3.780
3.930
4.080
4.300
4.600
Double Kerb
Wall
1 brick
2 bricks
1½ bricks
Blend to existing kerb
Retaining Wall to be removed
7.2m
5.66m
Blend to existing kerb
BEACH PARK
'Mermaid'
Grass
Tarmac
Retaining wall
Gravel
Gravel Path
Gravel Path
Gravel Path