WINDOW SCHEDULE - GROUND FLOOR

WINDOW REF.	LOCATION	STRUCTURAL OPENING - WxD (mm)	WALL TYPE	LINTEL - Subject to Structural Engineers checking & approval for loadings.	OVERALL LENGTH (mm)	GLAZING		SAFETY GLASS	WINDOW TYPES	ESCAPE WINDOW	SECURED BY DESIGN	COMMENTS
						CLEAR	OBSCURE					
WG-01	BEDROOM 1 - UNIT 2	860 x 1800	RENDER ON BLOCK	YES - TYPE TO BE CONFIRMED	1200	✓		YES	A	YES	NO	-
WG-02	BEDROOM 3 - UNIT 2	860 x 1800	RENDER ON BLOCK	YES - TYPE TO BE CONFIRMED	1200	✓		YES	A	YES	NO	-
WG-03	KITCHEN - UNIT 2	860 x 1800	RENDER ON BLOCK	YES - TYPE TO BE CONFIRMED	1200	✓		YES	A	NO	NO	TOP SASH OPENING ONLY; BOTTOM SASH FIXED
WG-04	KITCHEN / DINING - UNIT 2	860 x 1800	RENDER ON BLOCK	YES - TYPE TO BE CONFIRMED	1200	✓		YES	A	NO	NO	-
WG-05	DINING - UNIT 2	860 x 1800	RENDER ON BLOCK	YES - TYPE TO BE CONFIRMED	1200	✓		YES	A	YES	NO	-
WG-06	LIVING - UNIT 2	1085 x 1875	FLINT FACING	YES - TYPE TO BE CONFIRMED	1500	✓		YES	B	YES	NO	STONE SURROUND; STONE HEAD, STONE QUOINS TO JAMB, STONE SILL
WG-07	LIVING - UNIT 1	1085 x 1875	FLINT FACING	YES - TYPE TO BE CONFIRMED	1500	✓		YES	B	YES	NO	STONE SURROUND; STONE HEAD, STONE QUOINS TO JAMB, STONE SILL
WG-08	DINING - UNIT 1	2340 x 1725	FLINT FACING	YES - TYPE TO BE CONFIRMED	2700	✓		YES	K	NO	NO	STONE SURROUND; STONE HEAD, STONE QUOINS TO JAMB, STONE SILL
WG-09	DINING - UNIT 1	1200 x 1725	FLINT FACING	YES - TYPE TO BE CONFIRMED	1500	✓		YES	L	NO	NO	STONE SURROUND; STONE HEAD, STONE QUOINS TO JAMB, STONE SILL - OPENINGS MIRRORED TO WG-10
WG-10	BEDROOM 1 - UNIT 1	1200 x 1725	FLINT FACING	YES - TYPE TO BE CONFIRMED	1500	✓		YES	L	NO	NO	STONE SURROUND; STONE HEAD, STONE QUOINS TO JAMB, STONE SILL - OPENINGS MIRRORED TO WG-09
WG-11	EN-SUITE - UNIT 1	488 x 1050	FACING BRICKWORK	YES - TYPE TO BE CONFIRMED	900		✓	NO	Q	NO	NO	BRICK SOLDIER TO HEAD, BRICK SILL
WG-12	BATHROOM - UNIT 1	915 x 1050	FACING BRICKWORK	YES - TYPE TO BE CONFIRMED	1350		✓	NO	R	NO	NO	BRICK SOLDIER TO HEAD, BRICK SILL
WG-13	BEDROOM 2- UNIT 1	1342 x 1050	FACING BRICKWORK	YES - TYPE TO BE CONFIRMED	1650	✓		NO	S	YES	NO	BRICK SOLDIER TO HEAD, BRICK SILL
WG-14	BEDROOM 2 - UNIT 2	1342 x 1050	FACING BRICKWORK	YES - TYPE TO BE CONFIRMED	1650	✓		NO	S	YES	NO	BRICK SOLDIER TO HEAD, BRICK SILL
WG-15	BATHROOM - UNIT 2	915 x 1050	FACING BRICKWORK	YES - TYPE TO BE CONFIRMED	1350		✓	NO	R	NO	NO	BRICK SOLDIER TO HEAD, BRICK SILL
WG-16	BEDROOM 1 - UNIT 2	488 x 1050	FACING BRICKWORK	YES - TYPE TO BE CONFIRMED	900	✓		NO	Q	NO	NO	BRICK SOLDIER TO HEAD, BRICK SILL
WG-17	COMMUNAL STAIRWELL	915 x 1200	FACING BRICKWORK	YES - TYPE TO BE CONFIRMED	1350	✓		NO	U	NO	NO	BRICK SOLDIER TO HEAD, BRICK SILL; FIRE RATED (30 Min) - NO OPENING CASEMENTS.
WG-18	OFFICE	1342 x 1500	FACING BRICKWORK	YES - TYPE TO BE CONFIRMED	1650	✓		YES	V	NO	NO	BRICK SOLDIER TO HEAD, BRICK SILL
WG-19	OFFICE	1342 x 1500	FACING BRICKWORK	YES - TYPE TO BE CONFIRMED	1650	✓		YES	V	NO	NO	BRICK SOLDIER TO HEAD, BRICK SILL
WG-20	OFFICE	1342 x 1500	FACING BRICKWORK	YES - TYPE TO BE CONFIRMED	1650	✓		YES	V	YES	NO	BRICK SOLDIER TO HEAD, BRICK SILL
WG-21	KITCHEN - EXISTING DWELLING	1170 x 1440	RENDER ON EXIST.	TBC - EXISTING OPENING	-	✓		YES	AA	NO	NO	EXISTING OPENING
WG-22	LIVING / DINING - EXISTING DWELLING	1720 x 1555	RENDER ON EXIST.	TBC - EXISTING OPENING	-	✓		YES	AD	NO	NO	EXISTING OPENING

WINDOW SCHEDULE - FIRST FLOOR

WINDOW REF.	LOCATION	STRUCTURAL OPENING - WxD (mm)	WALL TYPE	LINTEL - Subject to Structural Engineers checking & approval for loadings.	OVERALL LENGTH (mm)	GLAZING		SAFETY GLASS	WINDOW TYPES	ESCAPE WINDOW	SECURED BY DESIGN	COMMENTS
						CLEAR	OBSCURE					
WF-01	LIVING / DINING - UNIT 5	410 x 1500	RENDER ON BLOCK	YES - TYPE TO BE CONFIRMED	2100	✓		NO	E	NO	NO	WINDOW FORMS A PROJECTING BAY - WF01, 02, 03 - TO WINDOW SUPPLIERS DESIGN
WF-02	LIVING / DINING - UNIT 5	1085 x 1500				✓		NO	F	YES	NO	WINDOW FORMS A PROJECTING BAY - WF01, 02, 03 - TO WINDOW SUPPLIERS DESIGN
WF-03	LIVING / DINING - UNIT 5	410 x 1500				✓		NO	E	NO	NO	WINDOW FORMS A PROJECTING BAY - WF01, 02, 03 - TO WINDOW SUPPLIERS DESIGN
WF-04	LIVING / DINING - UNIT 6	635 x 1500	RENDER ON BLOCK	YES - TYPE TO BE CONFIRMED	2700	✓		NO	G	NO	NO	WINDOW FORMS A PROJECTING BAY - WF04, 05, 06 - TO WINDOW SUPPLIERS DESIGN
WF-05	LIVING / DINING - UNIT 6	1085 x 1500				✓		NO	F	YES	NO	WINDOW FORMS A PROJECTING BAY - WF04, 05, 06 - TO WINDOW SUPPLIERS DESIGN
WF-06	LIVING / DINING - UNIT 6	635 x 1500				✓		NO	G	NO	NO	WINDOW FORMS A PROJECTING BAY - WF04, 05, 06 - TO WINDOW SUPPLIERS DESIGN
WF-07	LIVING / DINING - UNIT 7	635 x 1350	FACING BRICKWORK	YES - TYPE TO BE CONFIRMED	1050	✓		NO	J	NO	NO	-
WF-08	LIVING / DINING - UNIT 7	410 x 1500	FACING BRICKWORK	YES - TYPE TO BE CONFIRMED	2100	✓		NO	E	NO	NO	WINDOW FORMS A PROJECTING BAY - WF08, 09, 10 - TO WINDOW SUPPLIERS DESIGN
WF-09	LIVING / DINING - UNIT 7	1085 x 1500				✓		NO	H	YES	NO	WINDOW FORMS A PROJECTING BAY - WF08, 09, 10 - TO WINDOW SUPPLIERS DESIGN
WF-10	LIVING / DINING - UNIT 7	410 x 1500				✓		NO	E	NO	NO	WINDOW FORMS A PROJECTING BAY - WF08, 09, 10 - TO WINDOW SUPPLIERS DESIGN
WF-11	LIVING / DINING - UNIT 7	635 x 1350	FACING BRICKWORK	YES - TYPE TO BE CONFIRMED	1050	✓		NO	J	NO	NO	-
WF-12	LIVING / DINING - UNIT 8	635 x 1500	RENDER ON BLOCK	YES - TYPE TO BE CONFIRMED	2700	✓		NO	G	NO	NO	WINDOW FORMS A PROJECTING BAY - WF12, 13, 14 - TO WINDOW SUPPLIERS DESIGN
WF-13	LIVING / DINING - UNIT 8	1085 x 1500				✓		NO	F	YES	NO	WINDOW FORMS A PROJECTING BAY - WF12, 13, 14 - TO WINDOW SUPPLIERS DESIGN
WF-14	LIVING / DINING - UNIT 8	635 x 1500				✓		NO	G	NO	NO	WINDOW FORMS A PROJECTING BAY - WF12, 13, 14 - TO WINDOW SUPPLIERS DESIGN
WF-15	LIVING / DINING - UNIT 9	1770 x 1500	FLINT FACING	YES - TYPE TO BE CONFIRMED	2100	✓		YES	N	YES	NO	STONE SURROUND; STONE HEAD, STONE QUOINS TO JAMB, STONE SILL.
WF-16	LIVING / DINING - UNIT 9	1200 x 1500	FLINT FACING	YES - TYPE TO BE CONFIRMED	1500	✓		YES	M	NO	NO	STONE SURROUND; STONE HEAD, STONE QUOINS TO JAMB, STONE SILL - OPENINGS MIRRORED TO WF-17
WF-17	KITCHEN - UNIT 9	1200 x 1500	FLINT FACING	YES - TYPE TO BE CONFIRMED	1500	✓		YES	M	NO	NO	STONE SURROUND; STONE HEAD, STONE QUOINS TO JAMB, STONE SILL - OPENINGS MIRRORED TO WF-16
WF-18	KITCHEN - UNIT 9	1770 x 1350	FLINT FACING	YES - TYPE TO BE CONFIRMED	2100	✓		NO	P	NO	NO	STONE SURROUND; STONE HEAD, STONE QUOINS TO JAMB, STONE SILL
WF-19	WC - UNIT 9	488 x 1050	RENDER ON BLOCK	YES - TYPE TO BE CONFIRMED	900		✓	NO	Q	NO	NO	OPENING TO BE 100mm AS NORMAL; WITH PRESS BUTTON OVER-RIDE TO FULLY OPEN
WF-20	KITCHEN - UNIT 8	1342 x 1050	RENDER ON BLOCK	YES - TYPE TO BE CONFIRMED	1650	✓		NO	S	NO	NO	OPENING TO BE 100mm AS NORMAL; WITH PRESS BUTTON OVER-RIDE TO FULLY OPEN
WF-21	KITCHEN - UNIT 7	1342 x 1050	RENDER ON BLOCK	YES - TYPE TO BE CONFIRMED	1650	✓		NO	S	NO	NO	OPENING TO BE 100mm AS NORMAL; WITH PRESS BUTTON OVER-RIDE TO FULLY OPEN
WF-22	KITCHEN - UNIT 6	1342 x 1050	RENDER ON BLOCK	YES - TYPE TO BE CONFIRMED	1650	✓		NO	S	NO	NO	OPENING TO BE 100mm AS NORMAL; WITH PRESS BUTTON OVER-RIDE TO FULLY OPEN
WF-23	WC - UNIT 5	488 x 1050	RENDER ON BLOCK	YES - TYPE TO BE CONFIRMED	900		✓	NO	Q	NO	NO	OPENING TO BE 100mm AS NORMAL; WITH PRESS BUTTON OVER-RIDE TO FULLY OPEN
WF-24	WC - UNIT 4	488 x 1050	RENDER ON BLOCK	YES - TYPE TO BE CONFIRMED	900		✓	NO	Q	NO	NO	OPENING TO BE 100mm AS NORMAL; WITH PRESS BUTTON OVER-RIDE TO FULLY OPEN
WF-25	COMMUNAL STAIRWELL	915 x 1050	RENDER ON BLOCK	YES - TYPE TO BE CONFIRMED	1350	✓		NO	R	NO	NO	FIRE RATED (30 Min) - NO OPENING CASEMENTS.
WF-26	LIVING / DINING - UNIT 10	1342 x 1050	RENDER ON BLOCK	YES - TYPE TO BE CONFIRMED	1650	✓		NO	S	YES	NO	OPENING TO BE 100mm AS NORMAL; WITH PRESS BUTTON OVER-RIDE TO FULLY OPEN
WF-27	LIVING / DINING - UNIT 11	1342 x 1050	RENDER ON BLOCK	YES - TYPE TO BE CONFIRMED	1650	✓		NO	S	YES	NO	OPENING TO BE 100mm AS NORMAL; WITH PRESS BUTTON OVER-RIDE TO FULLY OPEN
WF-28	BEDROOM 2 - EXISTING DWELLING	1200 x 1545	RENDER ON EXIST.	TBC - EXISTING OPENING	-	✓		YES	AB	NO	NO	EXISTING OPENING
WF-29	STAIRWELL - EXISTING DWELLING	1200 x 1710	RENDER ON EXIST.	TBC - EXISTING OPENING	-	✓		NO	AC	NO	NO	EXISTING OPENING
WF-30	BEDROOM 1 - EXISTING DWELLING	1050 x 1810	RENDER ON EXIST.	TBC - EXISTING OPENING	-	✓		YES	AE	NO	NO	EXISTING OPENING
WF-31	BEDROOM 1 - EXISTING DWELLING	1050 x 1810	RENDER ON EXIST.	TBC - EXISTING OPENING	-	✓		YES	AE	NO	NO	EXISTING OPENING

WINDOW SCHEDULE - SECOND FLOOR

WINDOW REF.	LOCATION	STRUCTURAL OPENING - WxD (mm)	WALL TYPE	LINTEL - Subject to Structural Engineers checking & approval for loadings.	OVERALL LENGTH (mm)	GLAZING		SAFETY GLASS	WINDOW TYPES	ESCAPE WINDOW	SECURED BY DESIGN	COMMENTS
						CLEAR	OBSCURE					
WS-01	BEDROOM 1 - UNIT 4	860 x 1350	RENDER ON BLOCK	YES - TYPE TO BE CONFIRMED	1200	✓		YES	C	NO	NO	-
WS-02	EN-SUITE - UNIT 4	860 x 1350	RENDER ON BLOCK	YES - TYPE TO BE CONFIRMED	1200		✓	YES	C	NO	NO	-
WS-03	BATHROOM - UNIT 4	860 x 1350	RENDER ON BLOCK	YES - TYPE TO BE CONFIRMED	1200		✓	YES	C	NO	NO	-
WS-04	BATHROOM - UNIT 5	860 x 1350	RENDER ON BLOCK	YES - TYPE TO BE CONFIRMED	1200		✓	YES	C	NO	NO	-
WS-05	EN-SUITE - UNIT 5	860 x 1350	RENDER ON BLOCK	YES - TYPE TO BE CONFIRMED	1200		✓	YES	C	NO	NO	-
WS-06	BEDROOM 1 - UNIT 5	860 x 1350	RENDER ON BLOCK	YES - TYPE TO BE CONFIRMED	1200	✓		YES	C	NO	NO	-
WS-07	BEDROOM 1 - UNIT 5	410 x 1500	RENDER ON BLOCK	YES - TYPE TO BE CONFIRMED	2100	✓		NO	E	NO	NO	WINDOW FORMS A PROJECTING BAY - WS07, 08, 09 - TO WINDOW SUPPLIERS DESIGN
WS-08	BEDROOM 1 - UNIT 5	1085 x 1500				✓		NO	F	NO	NO	WINDOW FORMS A PROJECTING BAY - WS07, 08, 09 - TO WINDOW SUPPLIERS DESIGN
WS-09	BEDROOM 1 - UNIT 5	410 x 1500				✓		NO	E	NO	NO	WINDOW FORMS A PROJECTING BAY - WS07, 08, 09 - TO WINDOW SUPPLIERS DESIGN
WS-10	BEDROOM 1 - UNIT 6	1810 (2No 860) x 1350	RENDER ON BLOCK	YES - TYPE TO BE CONFIRMED	2250	✓		NO	D	NO	NO	2No. WINDOW UNITS WITH A MULLION POST BETWEEN - TO WINDOW SUPPLIERS DESIGN
WS-11	BEDROOM 1 - UNIT 7	635 x 1350	FACING BRICKWORK	YES - TYPE TO BE CONFIRMED	1050	✓		NO	J	NO	NO	-
WS-12	BEDROOM 1 - UNIT 7	410 x 1500	FACING BRICKWORK	YES - TYPE TO BE CONFIRMED	2100	✓		NO	E	NO	NO	WINDOW FORMS A PROJECTING BAY - WS12, 13, 14 - TO WINDOW SUPPLIERS DESIGN
WS-13	BEDROOM 1 - UNIT 7	1085 x 1500				✓		NO	H	NO	NO	WINDOW FORMS A PROJECTING BAY - WS12, 13, 14 - TO WINDOW SUPPLIERS DESIGN
WS-14	BEDROOM 1 - UNIT 7	410 x 1500				✓		NO	E	NO	NO	WINDOW FORMS A PROJECTING BAY - WS12, 13, 14 - TO WINDOW SUPPLIERS DESIGN
WS-15	BEDROOM 1 - UNIT 7	635 x 1350	FACING BRICKWORK	YES - TYPE TO BE CONFIRMED	1050	✓		NO	J	NO	NO	-
WS-16	BEDROOM 1 - UNIT 8	860 x 1350	RENDER ON BLOCK	YES - TYPE TO BE CONFIRMED	1200	✓		NO	C	NO	NO	-
WS-17	BEDROOM 1 - UNIT 9	488 x 1050	FLINT FACING	YES - TYPE TO BE CONFIRMED	900	✓		NO	Q	NO	NO	STONE SURROUND; STONE HEAD, STONE QUOINS TO JAMB, STONE SILL; EASY CLEAN HINGES.
WS-18	BEDROOM 2 - UNIT 9	488 x 1050	FLINT FACING	YES - TYPE TO BE CONFIRMED	800	✓		NO	Q	NO	NO	STONE SURROUND; STONE HEAD, STONE QUOINS TO JAMB, STONE SILL; EASY CLEAN HINGES.
WS-19	BEDROOM 2 - UNIT 8	1342 x 1350	RENDER ON BLOCK	YES - TYPE TO BE CONFIRMED	1650	✓		YES	T	NO	NO	EASY CLEAN HINGES.
WS-20	BATHROOM - UNIT 8	915 x 1200	RENDER ON BLOCK	YES - TYPE TO BE CONFIRMED	1350		✓	NO	U	NO	NO	EASY CLEAN HINGES.
WS-21	BEDROOM 2 - UNIT 7	1342 x 1350	RENDER ON BLOCK	YES - TYPE TO BE CONFIRMED	1650	✓		YES	T	NO	NO	EASY CLEAN HINGES.
WS-22	BATHROOM - UNIT 7	915 x 1200	RENDER ON BLOCK	YES - TYPE TO BE CONFIRMED	1350		✓	NO	U	NO	NO	EASY CLEAN HINGES.
WS-23	BEDROOM 2 - UNIT 6	1342 x 1350	RENDER ON BLOCK	YES - TYPE TO BE CONFIRMED	1650	✓		YES	T	NO	NO	EASY CLEAN HINGES.
WS-24	BATHROOM - UNIT 6	915 x 1200	RENDER ON BLOCK	YES - TYPE TO BE CONFIRMED	1350		✓	NO	U	NO	NO	EASY CLEAN HINGES.
WS-25	BEDROOM 2 - UNIT 5	1342 x 1350	RENDER ON BLOCK	YES - TYPE TO BE CONFIRMED	1650	✓		YES	T	NO	NO	EASY CLEAN HINGES.
WS-26	BEDROOM 2 - UNIT 4	1342 x 1350	RENDER ON BLOCK	YES - TYPE TO BE CONFIRMED	1650	✓		YES	T	NO	NO	EASY CLEAN HINGES.
WS-27	BEDROOM 2 - UNIT 10	1342 x 1350	RENDER ON BLOCK	YES - TYPE TO BE CONFIRMED	1650	✓		YES	T	NO	NO	EASY CLEAN HINGES.
WS-28	BEDROOM 1 - UNIT 10	1342 x 1350	RENDER ON BLOCK	YES - TYPE TO BE CONFIRMED	1650	✓		YES	T	NO	NO	EASY CLEAN HINGES.
WS-29	BEDROOM 2 - UNIT 11	1342 x 1350	RENDER ON BLOCK	YES - TYPE TO BE CONFIRMED	1650	✓		YES	T	NO	NO	EASY CLEAN HINGES.
WS-30	BEDROOM 1 - UNIT 11	1342 x 1350	RENDER ON BLOCK	YES - TYPE TO BE CONFIRMED	1650	✓		YES	T	NO	NO	EASY CLEAN HINGES.

WINDOW SCHEDULE - ROOF

WINDOW REF.	LOCATION	STRUCTURAL OPENING - WxD (mm)	ROOF TYPE	LINTEL - Subject to Structural Engineers checking & approval for loadings.	OVERALL LENGTH (mm)	GLAZING		SAFETY GLASS	WINDOW TYPES	ESCAPE WINDOW	SECURED BY DESIGN	COMMENTS
						CLEAR	OBSCURE					
RL-01	BEDROOM 1 - UNIT 6	790 x 985 - TBC	ROOFING SLATE	-	-	✓		NO	-	NO	NO	780 (w) x 980 (l) - CONSERVATION GLAZED; CENTRE PIVOT; INCLUDE FOR ALL FLASHINGS & FITTINGS ETC.
RL-02	BATHROOM - UNIT 9	790 x 985 - TBC	ROOFING SLATE	-	-		✓	NO	-	NO	NO	780 (w) x 980 (l) - CONSERVATION GLAZED; CENTRE PIVOT; INCLUDE FOR ALL FLASHINGS & FITTINGS ETC.
RL-03	BEDROOM 2 - UNIT 8	790 x 985 - TBC	ROOFING SLATE	-	-	✓		NO	-	NO	NO	780 (w) x 980 (l) - CONSERVATION GLAZED; CENTRE PIVOT; INCLUDE FOR ALL FLASHINGS & FITTINGS ETC.
RL-04	BEDROOM 2 - UNIT 9	790 x 985 - TBC	ROOFING SLATE	-	-	✓		NO	-	NO	NO	780 (w) x 980 (l) - CONSERVATION GLAZED; CENTRE PIVOT; INCLUDE FOR ALL FLASHINGS & FITTINGS ETC.
RL-05	LANDING - UNIT 10	790 x 985 - TBC	ROOFING SLATE	-	-	✓		NO	-	NO	NO	780 (w) x 980 (l) - CONSERVATION GLAZED; CENTRE PIVOT; INCLUDE FOR ALL FLASHINGS & FITTINGS ETC. PROVIDE REACH POLE.
RL-06	BATHROOM - UNIT 10	790 x 985 - TBC	ROOFING SLATE	-	-		✓	NO	-	NO	NO	780 (w) x 980 (l) - CONSERVATION GLAZED; CENTRE PIVOT; INCLUDE FOR ALL FLASHINGS & FITTINGS ETC.
RL-07	LANDING - UNIT 11	790 x 985 - TBC	ROOFING SLATE	-	-	✓		NO	-	NO	NO	780 (w) x 980 (l) - CONSERVATION GLAZED; CENTRE PIVOT; INCLUDE FOR ALL FLASHINGS & FITTINGS ETC. PROVIDE REACH POLE.
RL-08	BATHROOM - UNIT 11	790 x 985 - TBC	ROOFING SLATE	-	-		✓	NO	-	NO	NO	780 (w) x 980 (l) - CONSERVATION GLAZED; CENTRE PIVOT; INCLUDE FOR ALL FLASHINGS & FITTINGS ETC.
AOV	COMMUNAL STAIRWELL	1250 x 1450 - TBC	SINGLE PLY MEMB.	TBC	TBC	✓		YES	-	NO	NO	AOV TO GIVE 1.0m2 FREE AREA FOR SMOKE CLEARANCE INC. FOR REMOTE OPERATION AT GROUND FLOOR

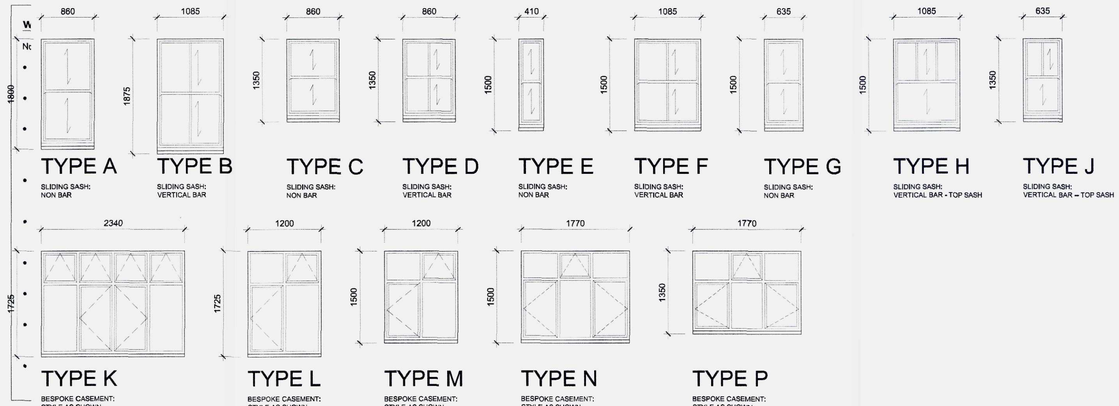

WINDOW ELEVATIONS (Structural Opening Sizes Shown)
Windows as viewed from outside - based on Jeldwen Windows:
Sliding Sash, Regency Stormsure & Plain Casement Stormsure:
Narrow Module types as applicable to the respective ranges.

windows

Notes:

- Lintel lengths as indicated are to be confirmed and to structural engineers details and manufacturers recommendations.
- Windows to have been successfully tested and certified to BS: 7950, 1997 and assessed to the relevant material standard.
- Escape windows to have a cill height no more than 1100mm from F.F.L and min area of 0.37 SqM with Min 450mm clear width and height. Narrow module windows are required to have no mullion to enable min width of 450mm to be provided.
- Where windows are required under building regulations (AD Part K: K4 and Section 5 Diagram 5.1) to be fitted with safety glazing, laminated glass (min 6.4mm thickness).
- Windows to be capable of being closed and locked in the fully closed and night vent positions, (key locked to ground floor and easily accessible windows), and button locks to first floor windows.
- Windows to bathroom and wc's glazed with Cotswold pattern obscured glass.
- Openable doors and windows to all habitable rooms to have equivalent minimum openable area of 1/20th of rooms floor area.
- All openable windows with a height of less than 800mm from F.F.L to the opening part of the window to be provided with guarding in accordance with AD Part K: K2 Section 3 Diagram 3.1.
- All windows must carry the CE mark in line with Regulation 7 Building Regulations 2010.

Note
Ensure construction is built in accordance with accredited details for thermal performance and air tightness as included within the SAP 2009 assessment.
Applicable Detail ref:
Window cill - MCI-WD-04
Window Jamb - MCI-WD-05
Window Head - MCI-WD-02
Eaves - MCI-RE-01

CDM 2007 Health & Safety Information

This Information relates only to 'Significant Hazards' identified on this drawing and is to be read in conjunction with the Designer's Risk Assessment Register.

- Lifting of concrete masonry blocks
- Lifting of stone cills
- External Cleaning of first floor windows

ADUR & WORTHING PLANNING SERVICES
PLAN: ~~AWDM~~ WS 1/0103 3/FULL
DATE VALID: 31 OCT 2013

Rev Date Revision Details Dr Ch

London: Unit 1 West Coate House 3 Coate Street London E2 9AG
T 020 7729 5505 E london@ecearchitecture.com
Sussex: Brooklyn Chambers 11 Goring Road Worthing West Sussex BN12 4AP
T 01903 248777 E sussex@ecearchitecture.com
www.ecearchitecture.com
ECE Architecture

Client's Name
Kitmarr Ltd

Job Title
Spells Yard
Grafton Place, Worthing

Drawing Title
Window Schedule

Scale
1:50 @ A1 / 1:100 @ A3
metres 1 2 3 4 5

Drawn JB | Checked NS | Date 04.10.13

Job No 5976 | Drawing No S(31)005 | Rev -

Status
PRELIMINARY

CAD Plot date: 29/10/2013 - 15:38:03 5976 - ws-spells yard plans.dwg

© ECE Architecture Limited. No dimensions to be scaled from drawing except for the puposes of Planning Applications. The contractor should check all dimensions on site. It is the contractors responsibility to ensure compliance with Building Regulations.