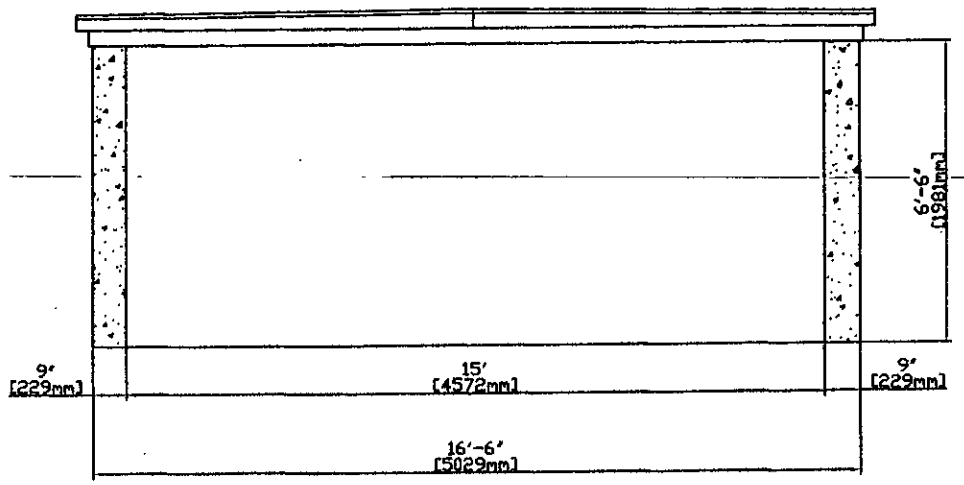

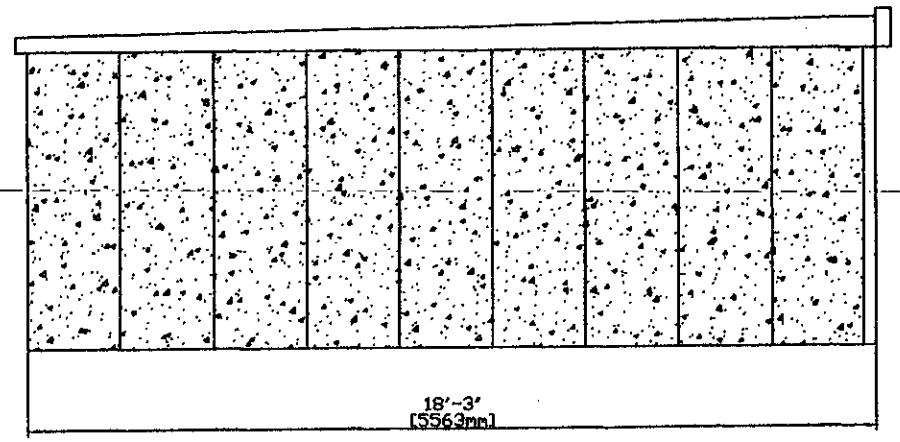

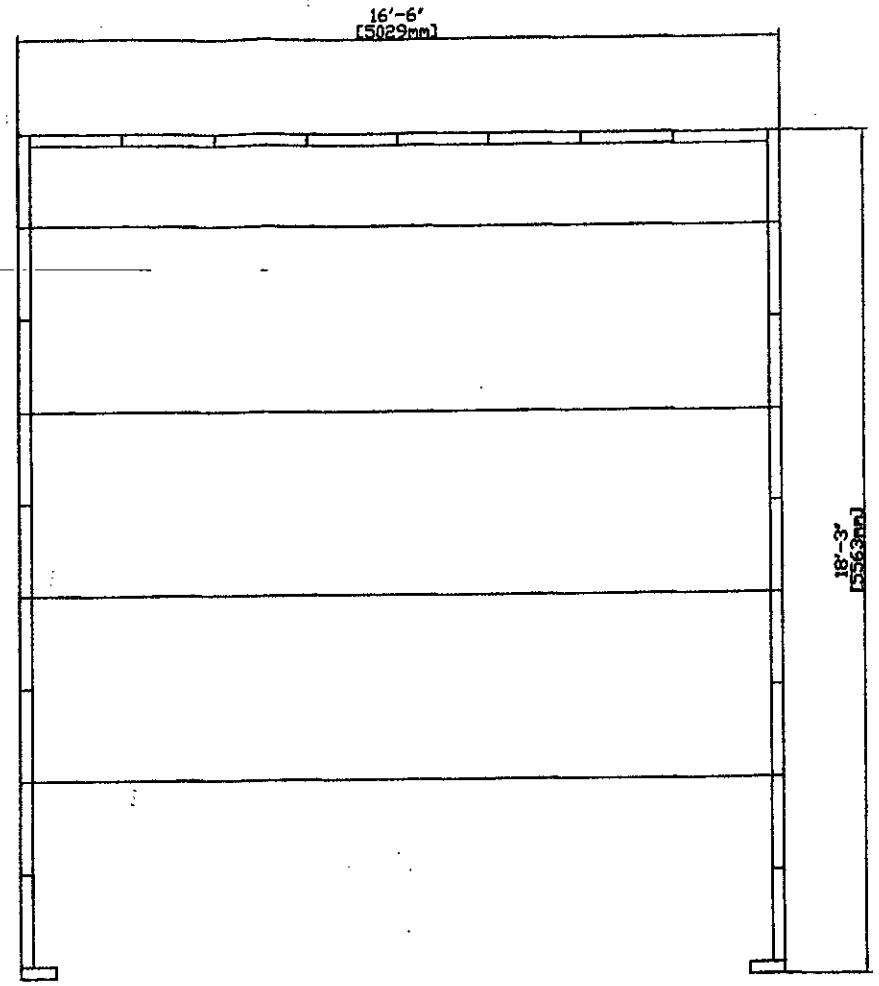

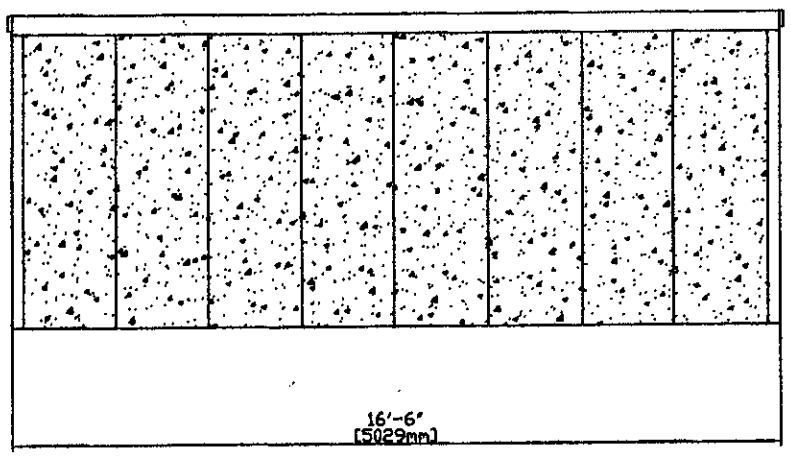

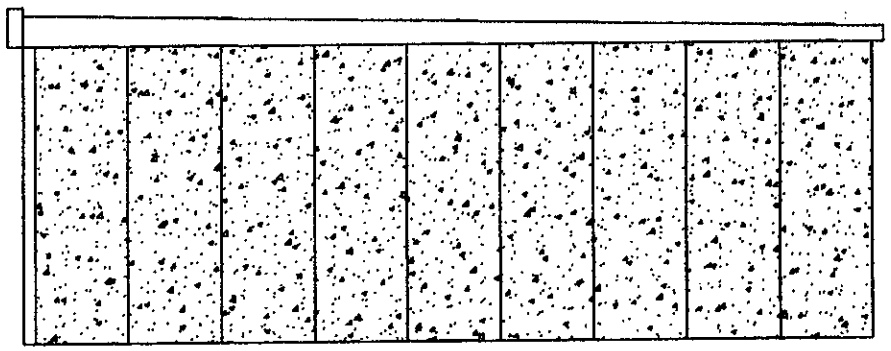

LidgetCompton 18'3" x 16'6" Pent Garage

Walls - 3" thick, steel reinforced, machine vibrated pre-cast concrete panels with pebble dash exterior finish

Roof - corrugated galvanised steel roof with Grafotherm anti-condensation lining, supported on galvanised steel trusses, with profiled foam filler to the rear.

Fascias - Treated timber fascias and back board

Gutters - Black PVCu to rear

Sand and cement fillet to inside walls

ADUR & WORTHING PLANNING SERVICES	
PLAN	AWDM/1544/12
DATE VALID	21 DEC 2012

DAVID DAWSON
Architectural Services
Tel / Fax: 01903 764515

Client: Mr. & Mrs. Atkinson, 8 Boxgrove Close, Lancing	Ratio: 1:50 unless otherwise stated	Drawing No: SK / 1A	NOTE: THIS DRAWING SHOULD NOT BE SCALED & ALL DIMENSIONS MUST BE CHECKED ON SITE
	Job No: 32/2386		
Project: replacement detached garage to front of property	Date: December 2012	Rev No:	
Drawing Title: Planning – PROPOSED	8 Fifth Avenue, LANCING, West Sussex BN15 9QA Mobile: 07990 527999, e-mail: DDAS@talktalk.net		