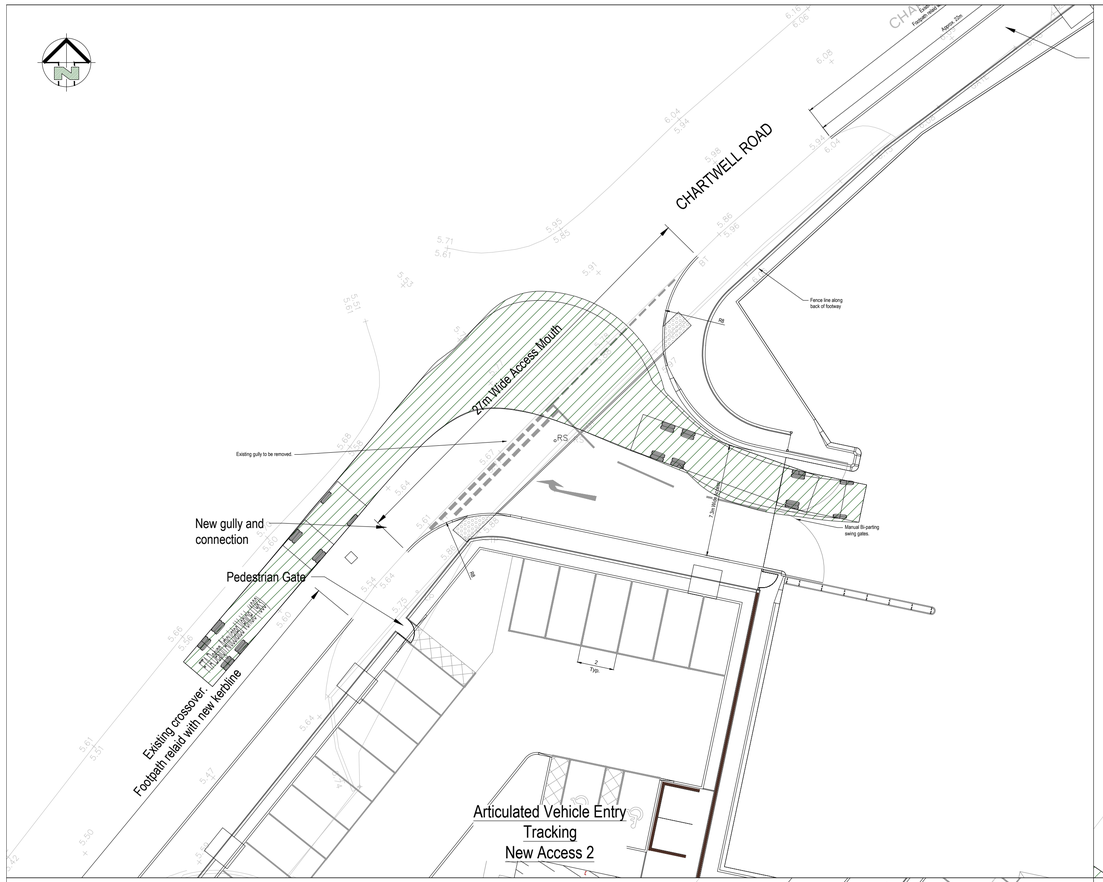

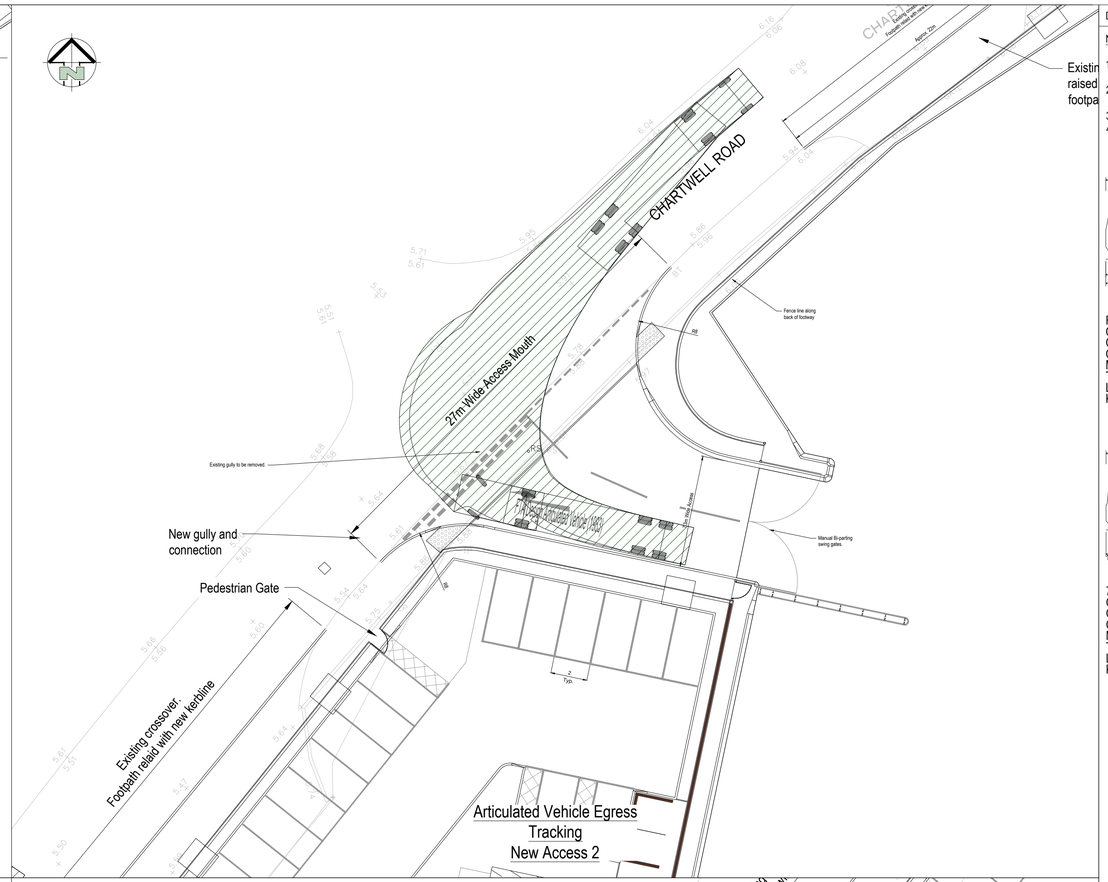

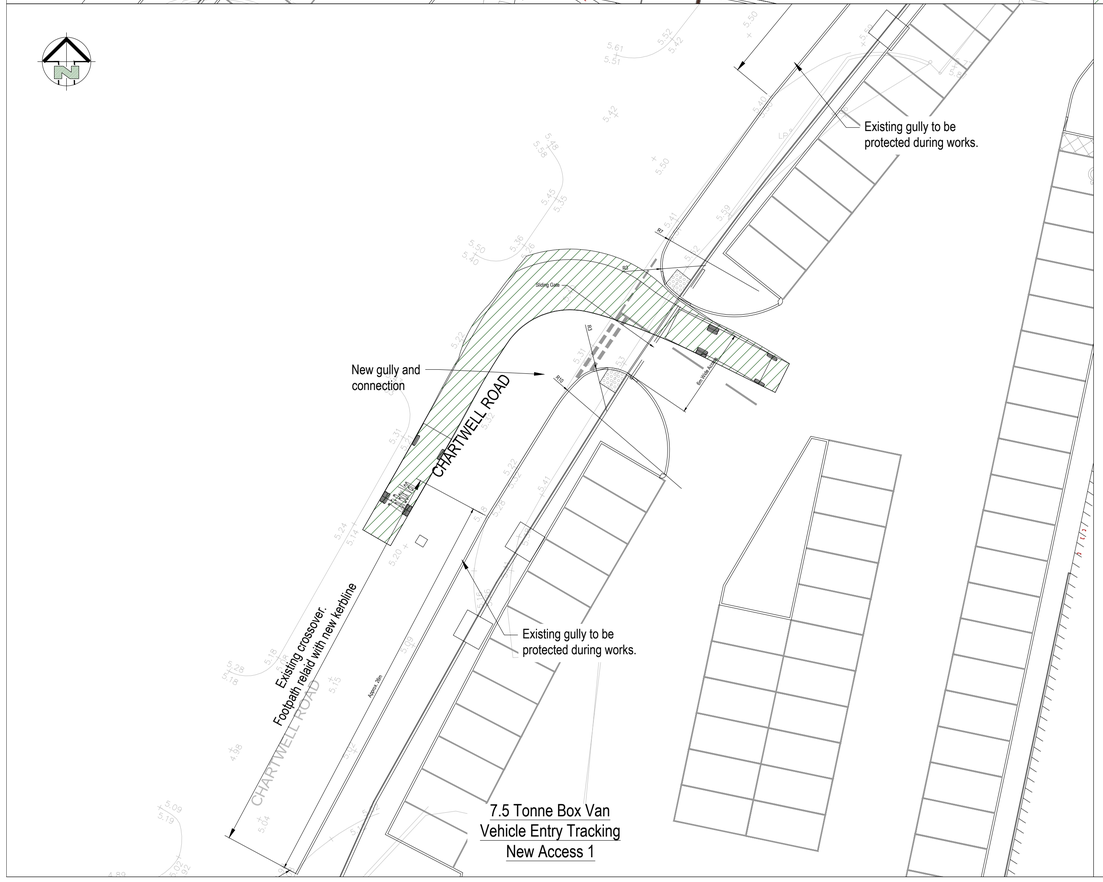

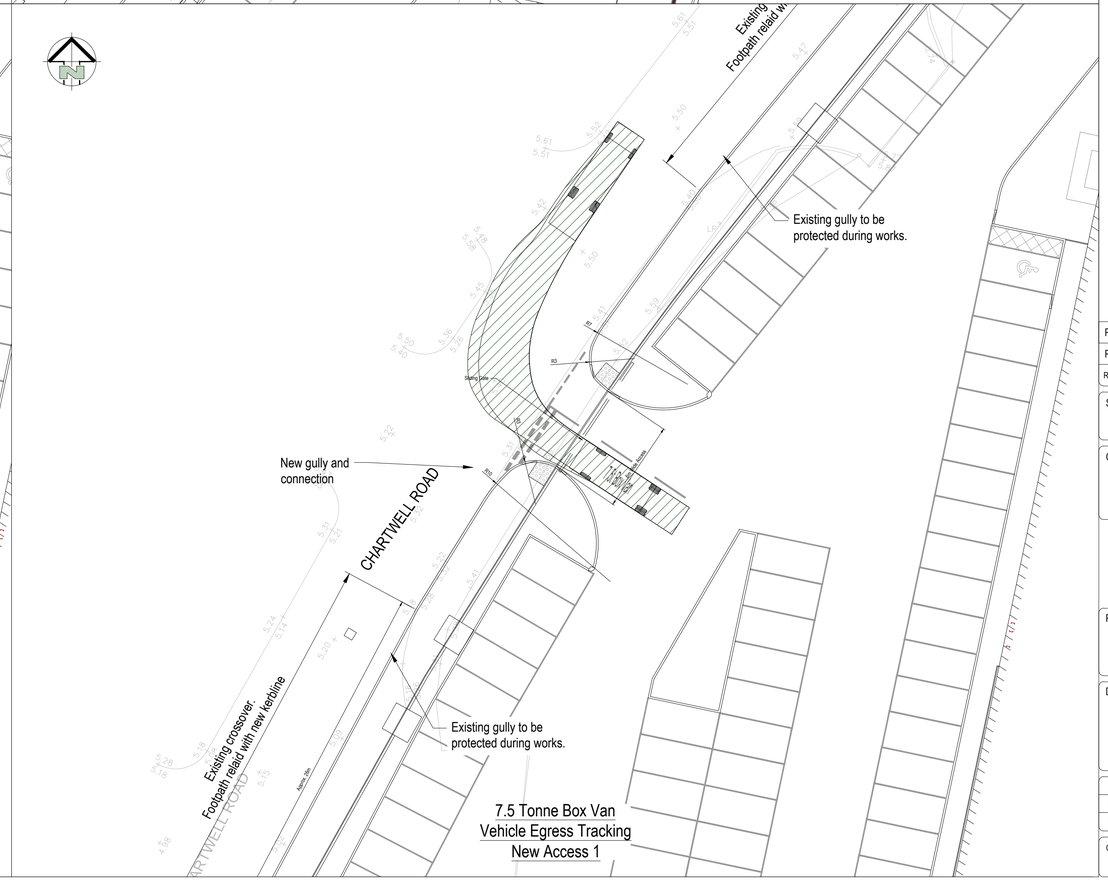

DO NOT SCALE OFF THIS DRAWING

Notes:

1. The contractor is responsible for verifying all site & setting out dimensions before commencing work.
2. This drawing is to be read in conjunction with all relevant Architectural and M & E drawings.
3. All dimensions in meters unless stated otherwise.
4. This drawing is prepared using KMG Partnership drawing 4336-304 Rev T1.



FTA Design Articulated Vehicle (1983)

Overall Length	15.500m
Overall Width	2.500m
Overall Body Height	3.695m
Min Body Ground Clearance	0.428m
Track Width	2.500m
Lock to Lock Time	6.00s
Kerb to Kerb Turning Radius	6.750m



7.5t Box Van

Overall Length	8.010m
Overall Width	2.100m
Overall Body Height	3.556m
Min Body Ground Clearance	0.351m
Track Width	2.064m
Lock to Lock Time	4.00s
Kerb to Kerb Turning Radius	7.400m

Rev	Date	By	Comment	Chkd	Appr
P2	25.04.16	BM	DRAWING FRAME AMENDED	GD	GD
P1	20.04.16	BM	ISSUED FOR APPROVAL	GD	GD

Status

FOR APPROVAL

Client

BIDVEST FOOD SERVICE

Robert West
County House
St Mary's Street
Worcester
Worcestershire WR1 1HB
t: 01905 28288
f: 020 7539 9909
www.robertwest.co.uk

Project

BIDVEST FOODSERVICE
CHARTWELL ROAD, WORTHING

Drawing Title

PROPOSED BELLMOUTH
VEHICLE TRACKING

Drawn		Checked		Approved		Scale
By	BM	By	GD	By	GD	1:200 @ A1
Date	20.04.16	Date	20.04.16	Date	20.04.16	

Client No.	Project No.	Discipline	Drawing No.	Rev
5440	001	C	104	P2