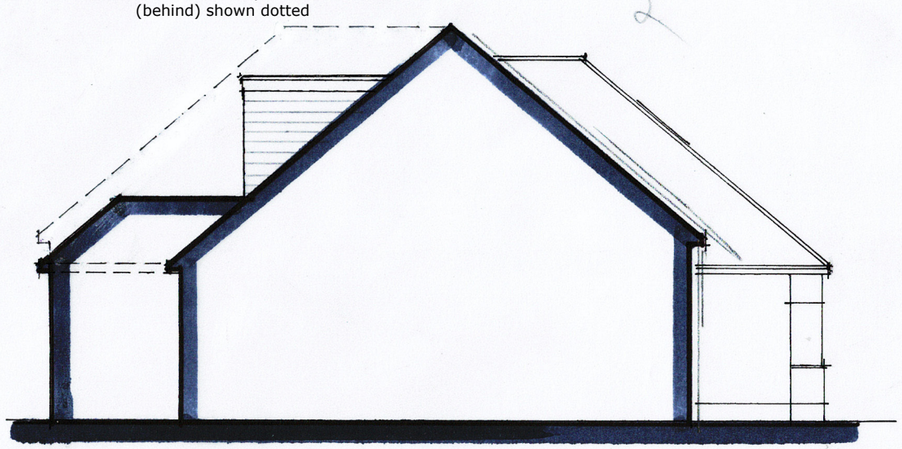

SIDE (n) ELEVATION 1:100 @ A3

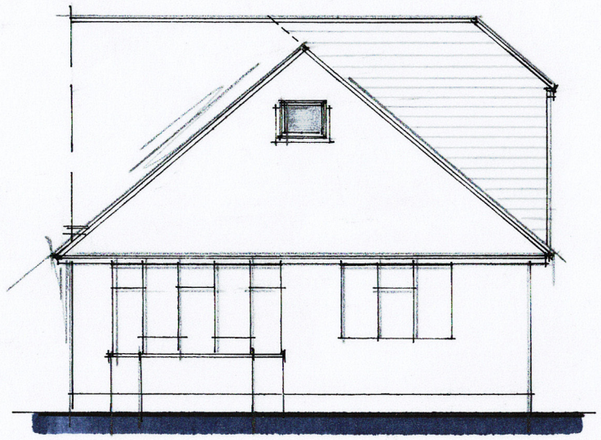

SIDE (w)

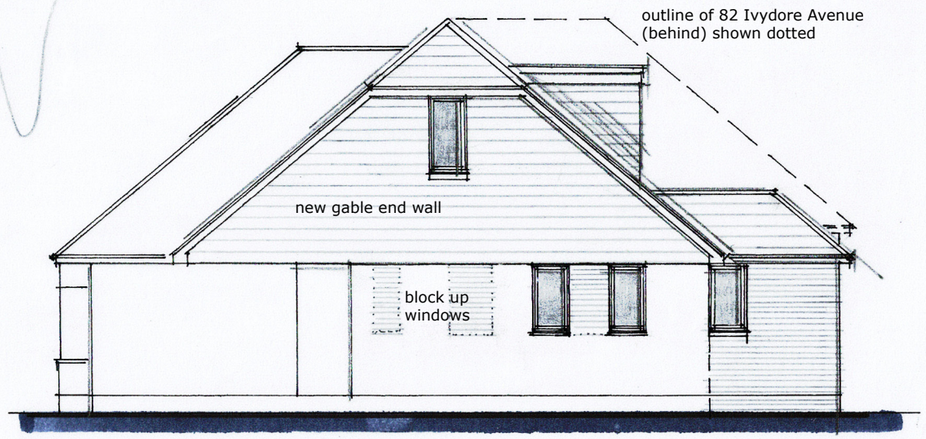

FRONT (s)





SIDE (e)

* new en-suite window to be obscure glazed

SCHEDULE OF FINISHES
Materials to be of similar appearance to existing property.

ELEVATIONS	: face brickwork to GF extension
	: vertical tile hanging to gable wall & dormer
ROOF	: plain roof tile to main roof and false pitched roof to GF extension
	: high performance felt or composite GRP to dormer
WINDOWS/DOORS	: white PVCu or grey powdercoated aluminium & double glazed
R/W GOODS	: black half round guttering & downpipes

THE CONTRACTOR IS TO PROVIDE SAMPLES FOR APPROVAL BY THE CLIENT & THE LOCAL PLANNING AUTHORITY IF REQUIRED.

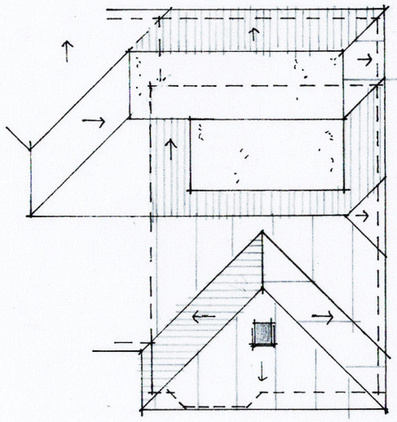

ROOF PLAN
1:200

WAYNE GANDER MCIAT
Chartered Architectural Technologist
98 Durrington Lane
WORTHING
West Sussex
BN13 2RQ
M – 07808 887896
E – waynegander08@gmail.com

B - master bed 1 window reduced in size, en-suite window to be obscure glazed 9/1/25
Revisions A - north elevation updated 11/11/24

30 WHYLANDS AVENUE, WORTHING
Proposals WT/WA/04B Sept 2024