This drawing is copyright and must not be reproduced without the written consent of the Architect.


REV	DATE	DESCRIPTION
A	13.06.25	PV panels and scooter store elevations added.
B	26.06.25	New door added to east elevation
C	10.07.25	Descriptions 14, 16 and 26 amended




East Elevation as Proposed - Scale 1:100



North Elevation as Proposed - Scale 1:100

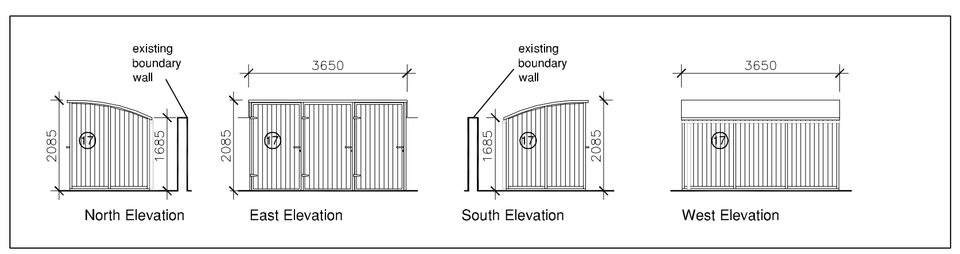

Elevations of the Proposed Mobility Scooter Store- Scale 1:100

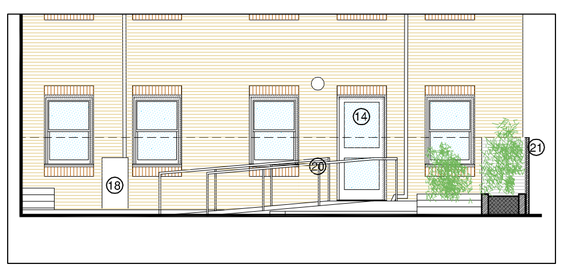

North Internal Elevation as Proposed - Scale 1:100

KEY

1 Existing slate roof tiles
2 Existing uPVC windows
3 Existing brickwork
4 Existing timber fence
5 Existing PPC aluminium louvres
6 Existing flat roof
7 Existing uPVC gutter and rain water pipes
8 Existing ramp
9 Existing PPC aluminium door
10 Existing render
11 New slate roof tiles to match existing
12 New uPVC windows to match existing
13 New brickwork to match existing
14 New PPC aluminium glazed door
15 New uPVC gutter to match existing
16 New PPC aluminium glazed door
17 New Mobility Scooter Store - hot dip galvanized frame with powder coated doors and panels
18 New uPVC water butts
19 Storage unit
20 New ramp and handrails
21 New 1.8m high double slatted timber fence
22 Frameless glass balustrade
23 New PPC aluminium conservatory glazed roof and glazed wall with sliding door
24 New signs: for details see drawing 25001 SK33
25 New photovoltaic panels
26 Existing uPVC inward opening door to be replaced with matching uPVC outward opening door

Scale Bar 1:100

0 1 2 3 4 5 10m

PLANNING

SK34C

25001 - Holland House, Worthing

Proposed Elevations - Sheet 2 of 2

Scale 1:100 @ A1

May 2025

saville jones consultants

74 victoria road worthing west sussex bn11 1un united kingdom
t +44 (0)1903 211 383 mail@saville-jones-architects.com