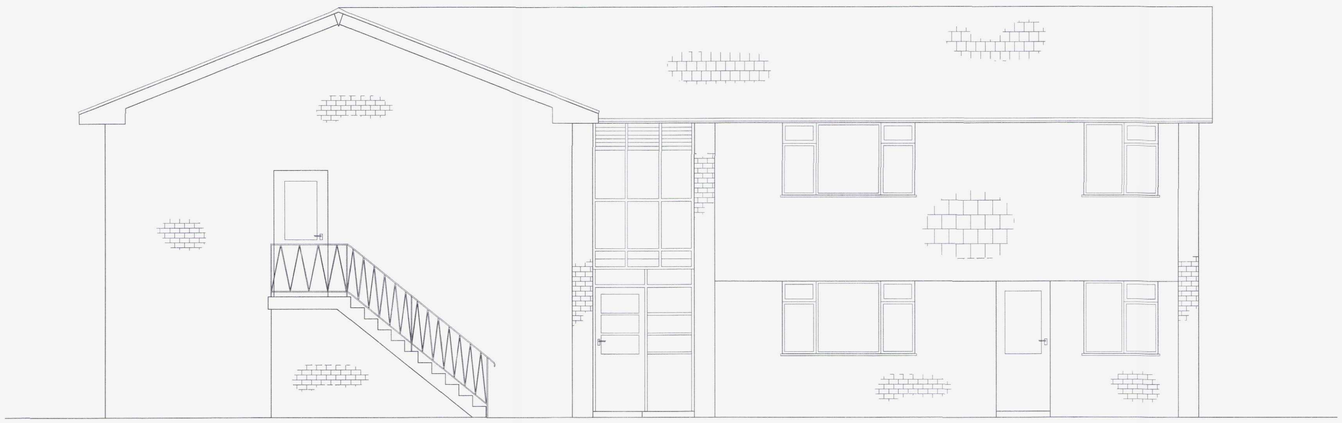

Block 21-25
Existing Southern Elevation.
(1:50)




Block 21-25
Proposed Southern Elevation.
(1:50)

New windows to be double glazed UPVC with maximum u-value of 1.8W/m²K, design to the planning authority's approval. Glazing to be toughened below 800mm from finished floor level. All windows to be fitted with trickle vents giving minimum background ventilation of 8,000mm² free area.




Location Plan.
(1:1250)

NORTH




Block Plan.
(1:500)



Southern Elevation
Entrance

SCALE BAR (1:1250)
SCALE BAR (1:500)
SCALE BAR (1:100)
SCALE BAR (1:50)

## General Notes

1. All dimensions to be checked on site. All details and dimensions relating to the sub-contractors or suppliers work must be checked and agreed between the subcontractors or supplier and the general contractor.
2. This drawing is to be read in conjunction with all relevant architect's and engineer's drawings and the specification.
3. Works to comply with current Codes of Practice, British Standards and Building Regulations.
4. Contractor to provide all necessary vertical and lateral restraint strapping in order to comply with The Building Regulations.

T.P. OFFICE COPY

BOROUGH OF WORTHING
DEPOSITED
TP REF No.
WB/ 1110/60

| | DATE | DESCRIPTION |
|---|---|---|

CLIENT:
Countrywide Property Management

ARCHITECT:
-

JOB TITLE:
Block 21-25
Harrison Court
Worthing

DRAWING TITLE:
Timber Entrance Structure Replacement

| DRAWING NUMBER | JOB No | DRG No | |
|---|---|---|---|
| | 10314 | 02 | |

| SCALE | | |
|---|---|---|
| As shown @ A1 | DRAWN BY | CW |
| | DATE | Dec '10 |
| | ENGINEER | CW |
| WORK TO FIGURED DIMENSIONS ONLY | CHECKED BY | PJG |

PHILIP GOACHER ASSOCIATES
CONSULTING CIVIL AND STRUCTURAL ENGINEERS
PARK HOUSE
122a NEWLAND ROAD, WORTHING
WEST SUSSEX, BN11 1LB
Tel: (01903) 217723 Email: mail@pgoacher.co.uk
www.pgoacher.co.uk