PROPOSED ELEVATIONS 1:100@ A3

0 1 2 3 4 5m
metres

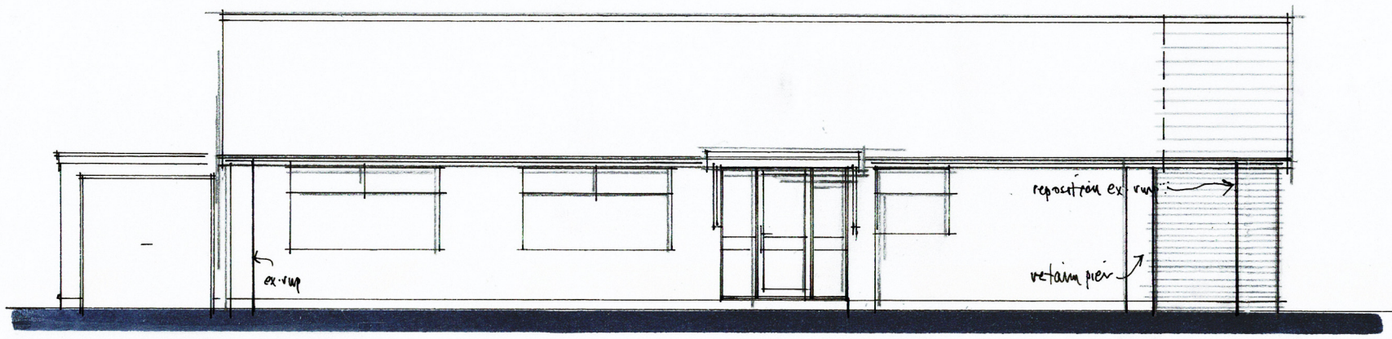

FRONT (n/e)

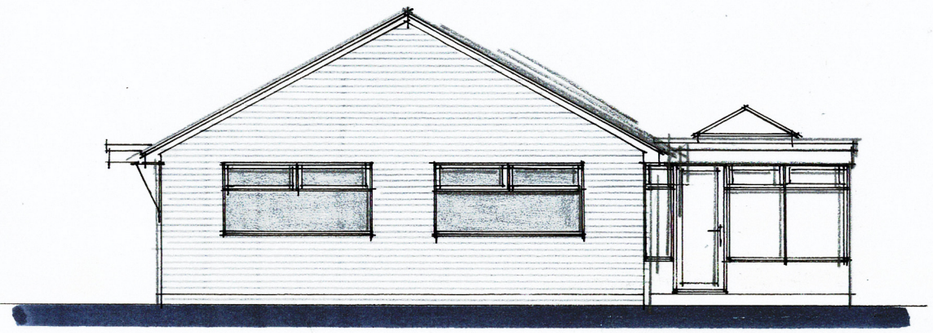

SIDE (n/w)

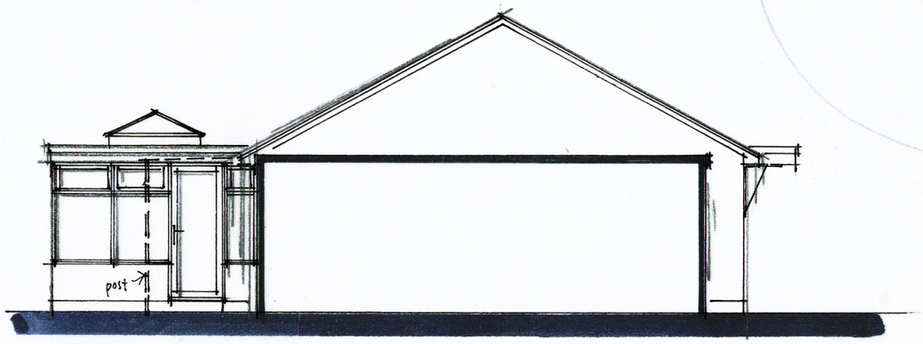

SIDE (s/e)

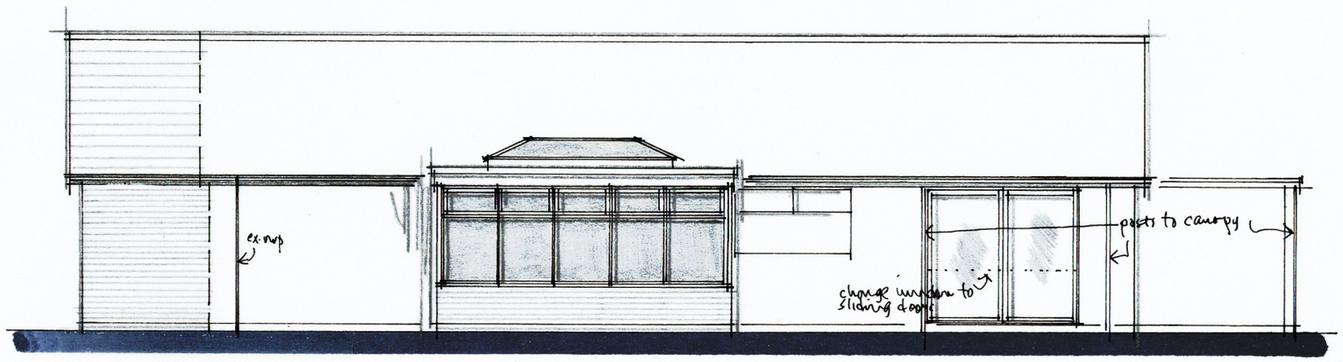

REAR (s/w)

SCHEDULE OF FINISHES

ELEVATIONS	- face brickwork & rendered façade
WINDOWS	- white PVCu plastic double glazed
ROOF	- interlocking roof tile to match existing with composite GRP flat roof to conservatory
EAVES	- white PVCu and double glazed
R/W GOODS	- white squareline Floplast guttering with 63mm diameter downpipes

THE CONTRACTOR IS TO PROVIDE SAMPLES FOR APPROVAL BY THE CLIENT AND THE LOCAL PLANNING AUTHORITY WHERE REQUIRED.

Revisions A - retain ex. front pier & change new window to bi-fold 5/6/21

Figured dimensions to take precedence over scaled dimensions. The contractor is to verify all dimensions on site before commencing any works.

Any discrepancies whatsoever to be brought to the attention of the client immediately.

The copyright of this drawing is reserved and the drawing must not be disclosed without authority.

Project

15 RUSPER ROAD SOUTH, WORTHING

Proposed single storey side extension & replacement conservatory to rear

Client

Mr & Mrs Hodges

Drawing no. **WT/RRS/04** A

Scale **AS SHOWN** Date **Oct 2020**

Drawn By **WG**

WAYNE GANDER MCIAT
Chartered Architectural Technologist
98 Durrington Lane
WORTHING
West Sussex
BN13 2RQ
Tel/Fax 01903 694817
Email - waynegander08@gmail.com