3 Freshbrook Road, Hancing

Lawful Development Certificate Application for a loft conversion

PD volume calculations

0380-19-05

Rear dormer

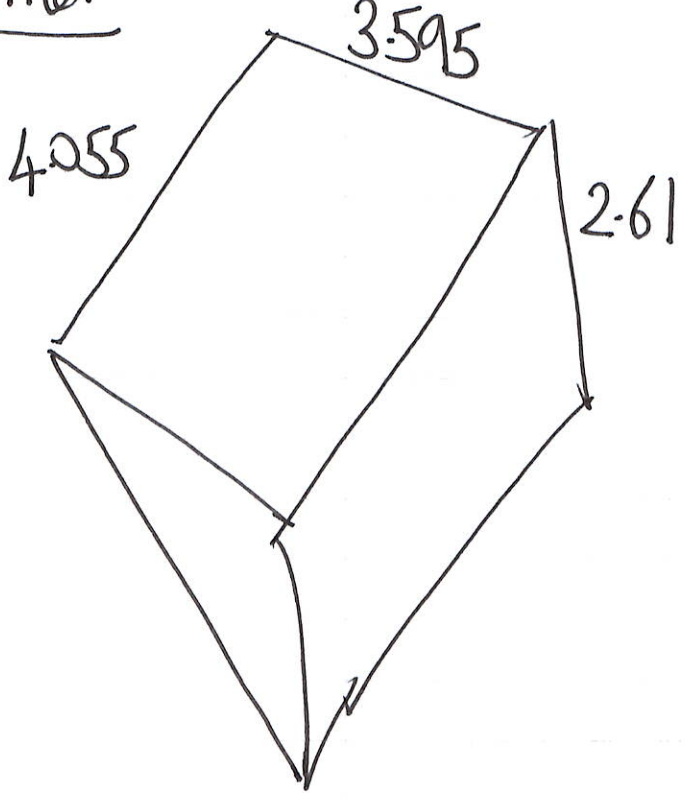

Volume = $4.055 \times 3.595 \times 2.61 \times \frac{1}{2} = 19.024\ m^3$

PWS roof fall

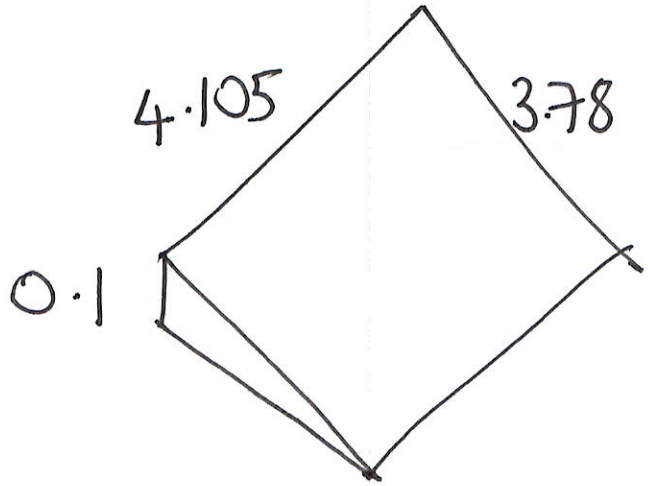

Volume = $0.1 \times 4.105 \times 3.78 \times \frac{1}{2} = 0.776\ m^3$

∴

Total volume of loft extension =

19.024
0.776

19.8 m^3

M.M. 13/2/19.