

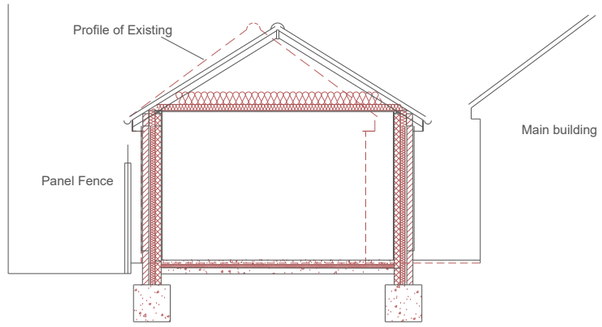



Section

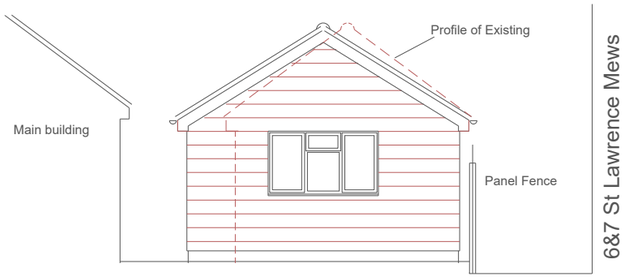

South Elevation

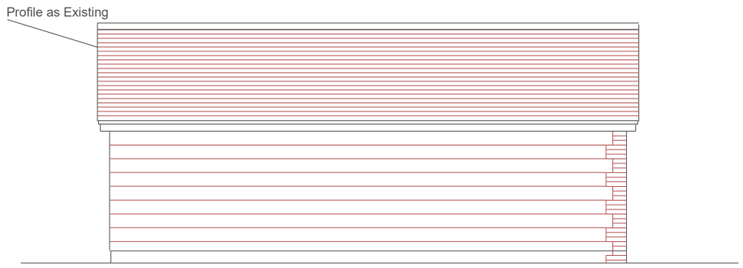


East Elevation

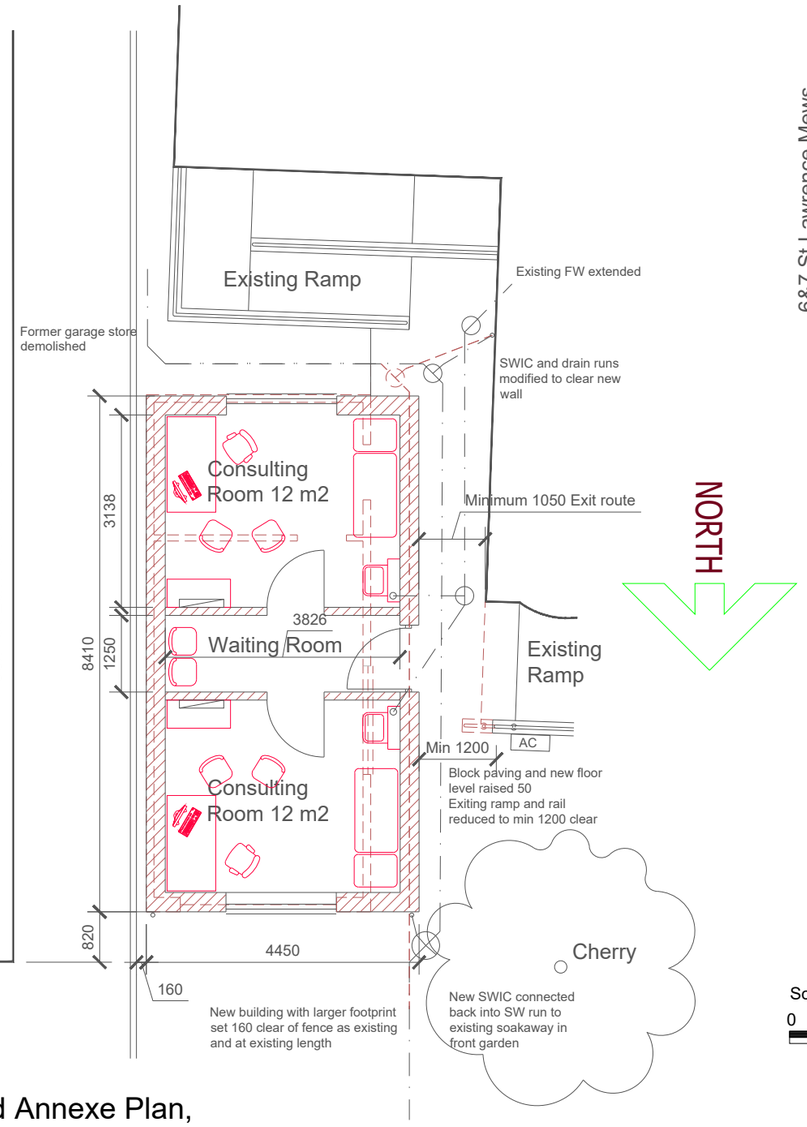



North Elevation

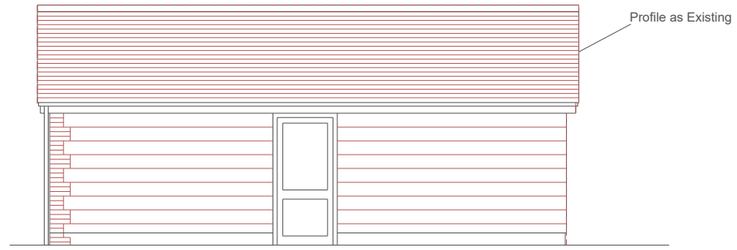

West Elevation

Materials

Walls
Plain painted rendered block cavity work ashlar scored as existing on three side
North elevation in face brickwork dressings returned at quoins.

Roof
New red plain clay tile to suit reduced pitch of 32 degrees

Fenestration
Windows and door in UPVC as main building

Scale Bar (meters)

0 1 2 3 4 5 10 15

Proposed Annexe Plan, Section and Elevations

June 2025 1:100

CAD file name:

C	15 July 2025	Building reduced to existing length and widened to maintain area
B	08 July 2025	Building set 200mm from fence at increased width with front elevation on existing alignment Roof at existing ridge level with new clay tile to suit reduced pitch, hip ends with bonnets
A	30 June 2025	AC unit removed

FOR DISCUSSION

MANHIRE LLP Surveyors

4 Elm Grove South, Barnham, West Sussex, PO22 0EL, tel 01243 815720, email: chris@manhirellp.com

Additional Consulting Rooms in Annexe, St Lawrence Surgery, Worthing BN14 7JL 0088/SK-11 C